
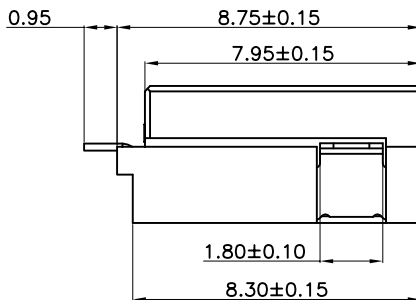




RoHS Compliant

REV.	ECN. NO.	DESCRIPTION	APPD.
	NEW RELEASE		

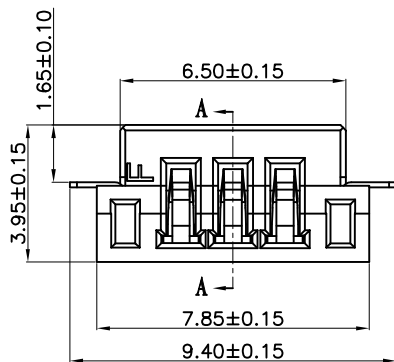


SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 1400V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

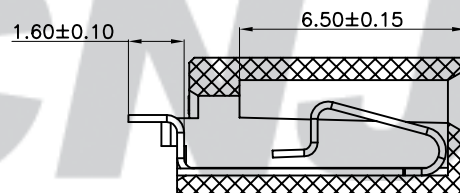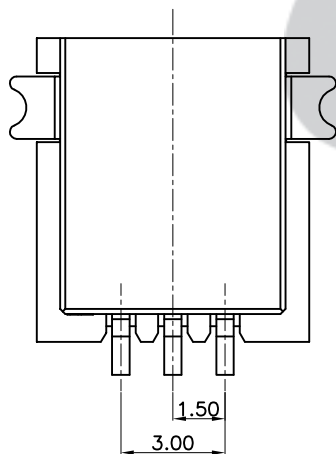

A-A

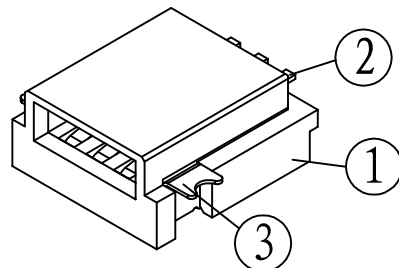

ORDER INFORMATION:

X1501AWR-03-F2MB-R		
PART No.		PACKAGING: R=REEL
No. OF CIRCUITS: 03		PLATING: A=Tin B=Mattn Sn
PLASTIC MATERIAL: F2M=LCP (NATURE)		

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tab	2	Brass	Mattn Sn-plated
②	Contacts	3	Phosphor Bronze	Mattn Sn-plated
①	Insulator	1	LCP	Nature

Tolerance 30≤X ±0.30 10≤X<30 ±0.20 5≤X<10 ±0.10 0<X<5 ±0.05 Angle ±3.0°	Model Name: 1.50mm PITCH 90° WAFER-SMT TYPE	SCALE: FULL	REVISION: B/0	Drawn: 林旭芝 2015. 04. 10
	Model No: X1501AWR-03-F2MB-R			Checked: 季晓荣
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONICS CO., LTD.			Approved: 季晓荣
				DWG NO. CNJST/GCCP-0400