
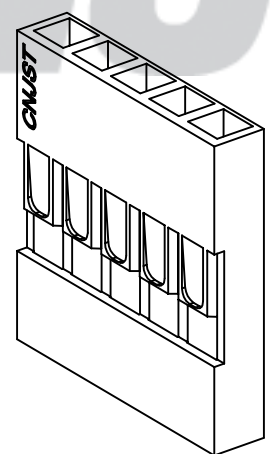
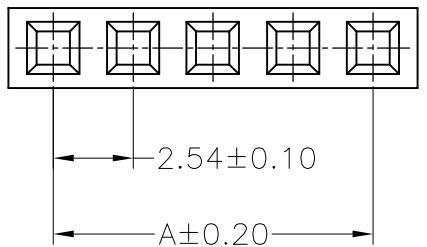
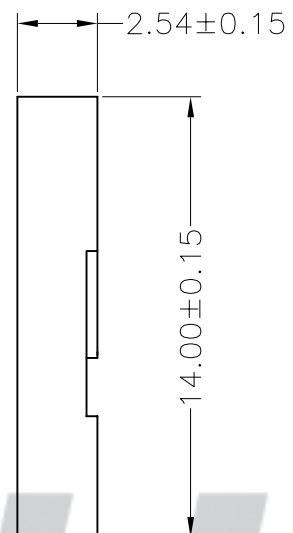


RoHS Compliant

成品图

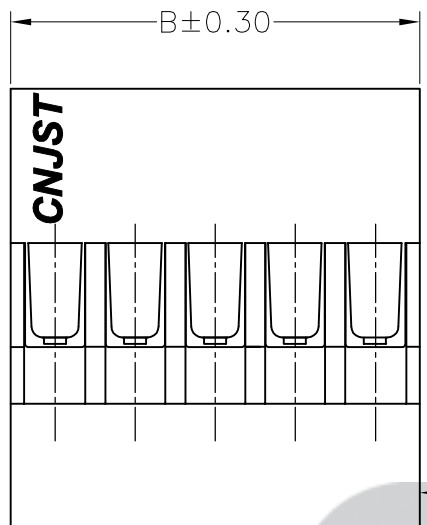

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.5 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2541Y--A8K-P**

PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 02~40	PLASTIC MATERIAL: A8K=PA66 (BLACK)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	2.54	5.08	16	38.10	40.64
03	5.08	7.62	17	40.64	43.18
04	7.62	10.16	18	43.18	45.72
05	10.16	12.70	19	45.72	48.26
06	12.70	15.24	20	48.26	50.80
07	15.24	17.78	21	50.80	53.34
08	17.78	20.32	22	53.34	55.88
09	20.32	22.86	23	55.88	58.42
10	22.86	25.40	24	58.42	60.96
11	25.40	27.94	25	60.96	63.50
12	27.94	30.48	26	63.50	66.04
13	30.48	33.02	27	66.04	68.58
14	33.02	35.56
15	35.56	38.10	40	99.06	101.60

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.10	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.54mm PITCH HOUSING		SCALE: FULL REVISION: B/0
	Model No: A2541Y-**-A8K-P		
		UNIT: mm	
CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD			

Drawn: 蔡忠忠 2016.05.10

Checked: 林旭芝

Approved: 刘祚杰

DWG NO. CNJST/GCCP-0089