
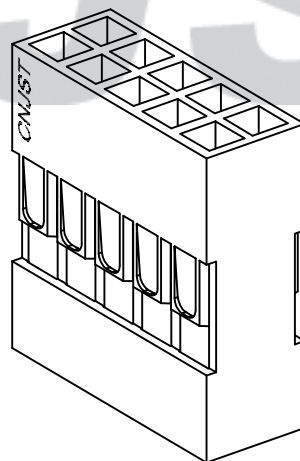
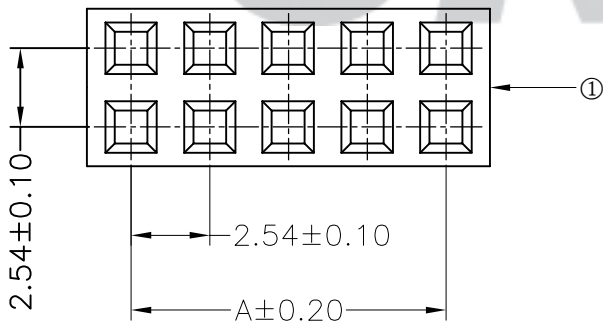
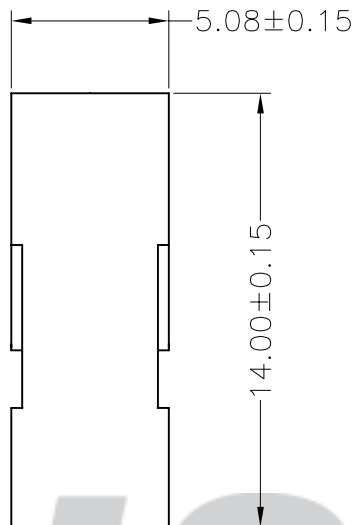


RoHS Compliant

成品图

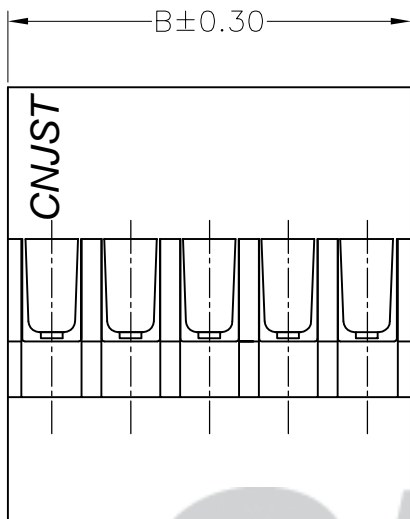

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.5 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2541Y-*-A8K-P**

PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 2X2~2X40	PLASTIC MATERIAL: A8K=PA66 (BLACK)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
202 (2X2)	2.54	5.08	216 (2X16)	38.10	40.64
203 (2X3)	5.08	7.62	217 (2X17)	40.64	43.18
204 (2X4)	7.62	10.16	218 (2X18)	43.18	45.72
205 (2X5)	10.16	12.70	219 (2X19)	45.72	48.26
206 (2X6)	12.70	15.24	220 (2X20)	48.26	50.80
207 (2X7)	15.24	17.78	221 (2X21)	50.80	53.34
208 (2X8)	17.78	20.32	222 (2X22)	53.34	55.88
209 (2X9)	20.32	22.86	223 (2X23)	55.88	58.42
210 (2X10)	22.86	25.40	224 (2X24)	58.42	60.96
211 (2X11)	25.40	27.94	225 (2X25)	60.96	63.50
212 (2X12)	27.94	30.48	226 (2X26)	63.50	66.04
213 (2X13)	30.48	33.02	227 (2X27)	66.04	68.58
214 (2X14)	33.02	35.56
215 (2X15)	35.56	38.10	240 (2X40)	99.06	101.60

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.10	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.54mm PITCH HOUSING		Drawn: 蔡忠忠 2016.05.10 Checked: 林旭芝 Approved: 刘祚杰
	Model No: A2541Y-***-A8K-P		
	SCALE: FULL	REVISION: B/0	
CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD			DWG NO. CNJST/GCCP-0090