

RoHS Compliant


成品图

SPECIFICATION

- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 1400V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

<b>X2501AWR-02-F2MB-R</b>	
PART No.	PACKAGING: R=REEL
No. OF CIRCUITS: 02	PLATING: A=Fin B=Mattn Sn
PLASTIC MATERIAL: F2M=LCP (NATURE)	

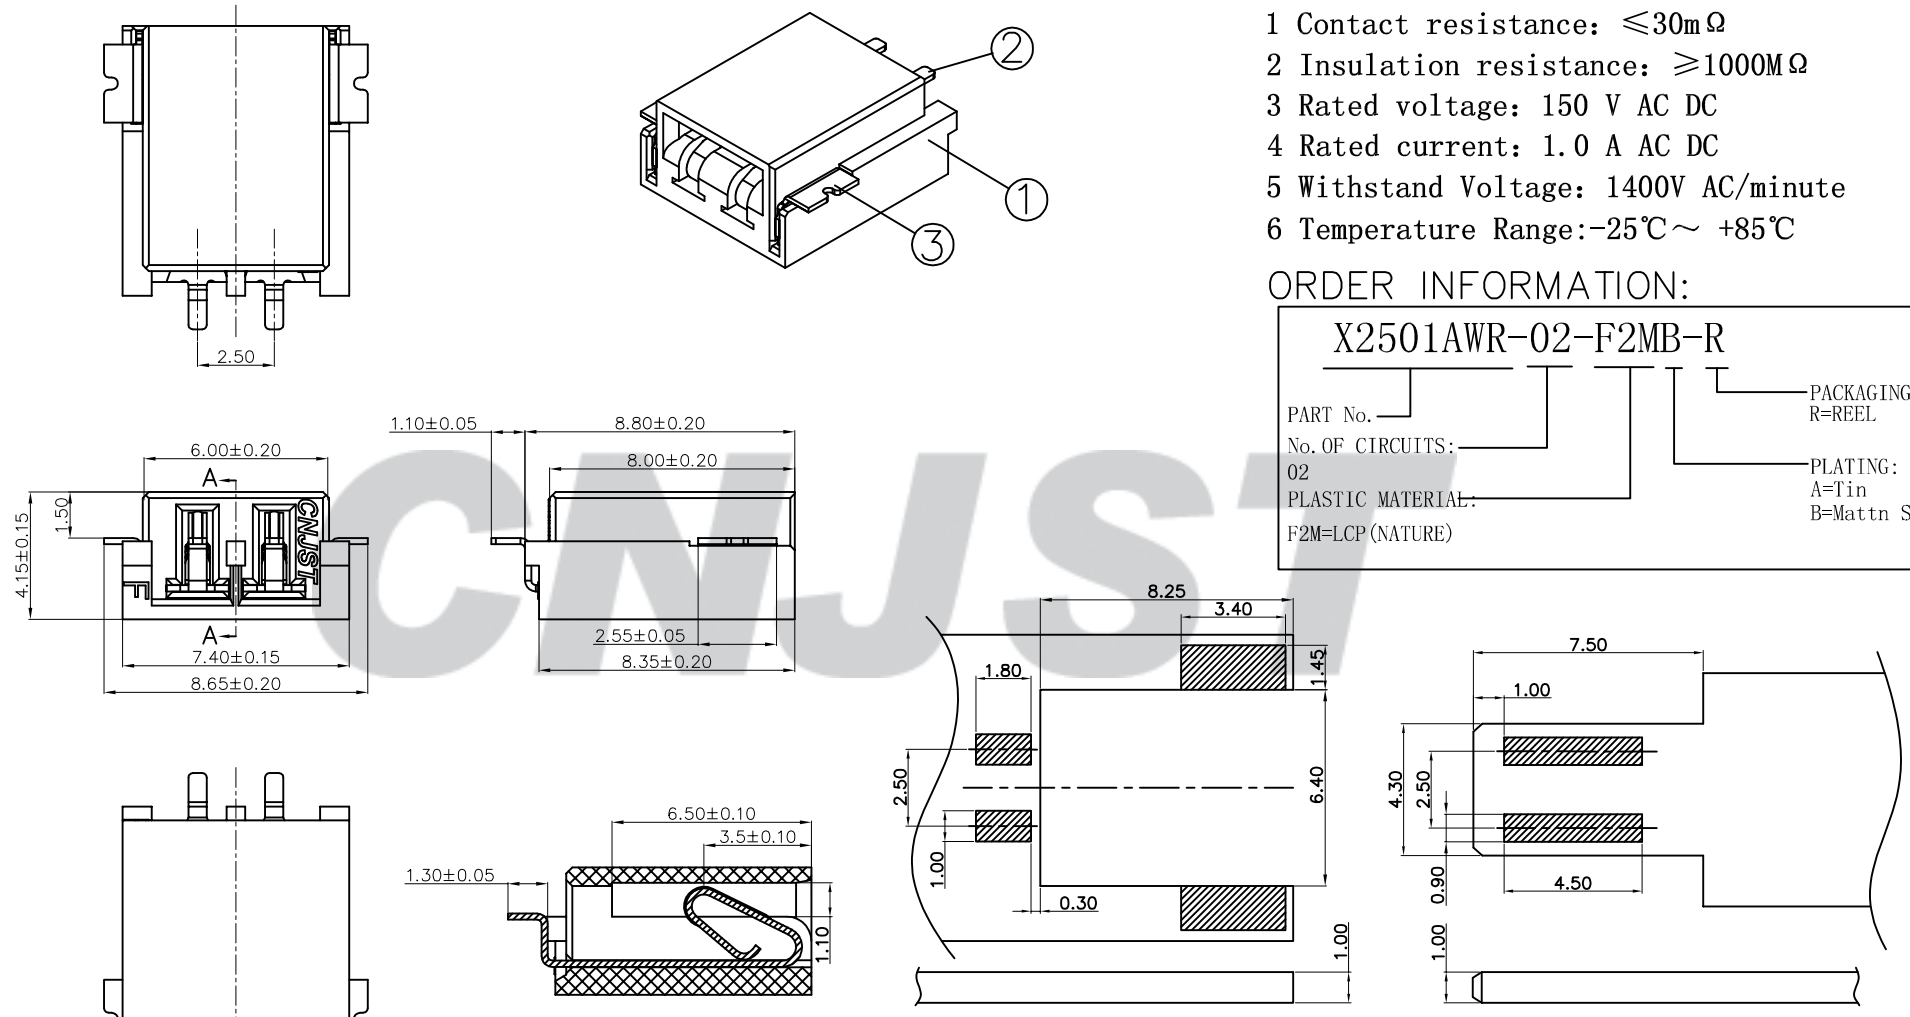

PCB LAYOUT

专利产品

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tab	2	Brass	Mattn Sn-plated
②	Contacts	2	Phosphor Bronze	Mattn Sn-plated
①	Insulator	1	LCP	Nature

Tolerance	Model Name: 2.50mm pitch 90° WAFER-SMT TYPE
X.X ±0.30	Model No: X2501AWR-02-F2MB-R
X.XX ±0.20	
X.XXX ±0.10	
Angle ±3.0°	
UNIT: mm	

	SCALE: FULL	REVISION: B/0
	<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	

Drawn: 张育斌 2016.04.13
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0376