


RoHS Compliant

成品图

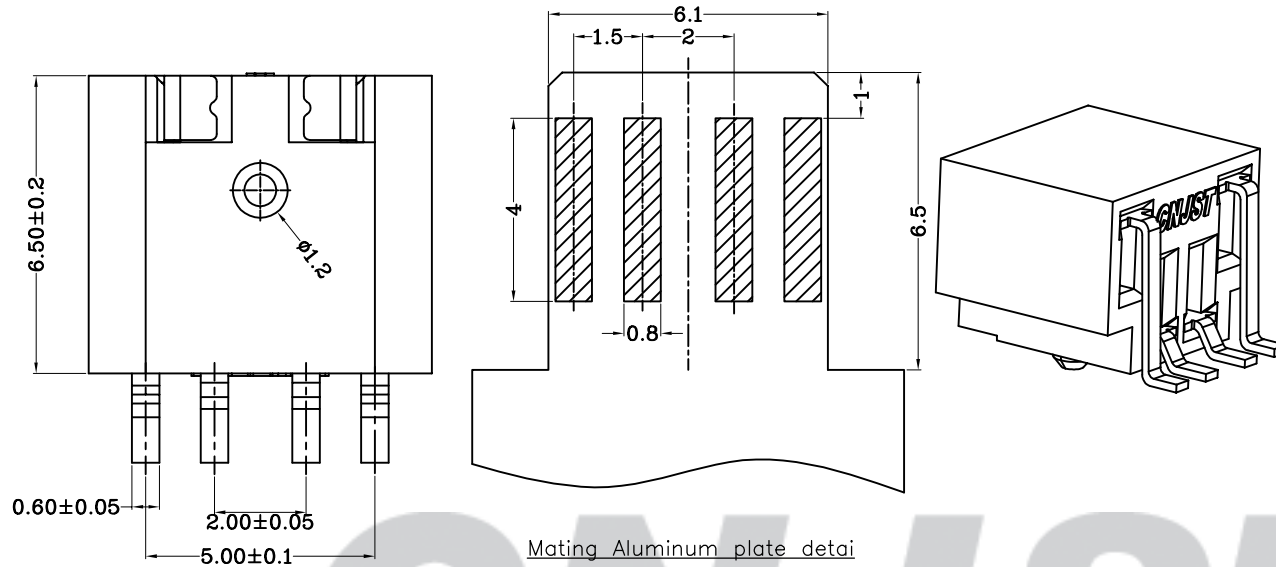



SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

TD201501MB-04-F2MB-R

PART No.:		PACKAGING:	
No. OF CIRCUITS:		R=REEL	
04		PLATING:	
PLASTIC MATERIAL:		B=Mattn Sn	
F2M=LCP			

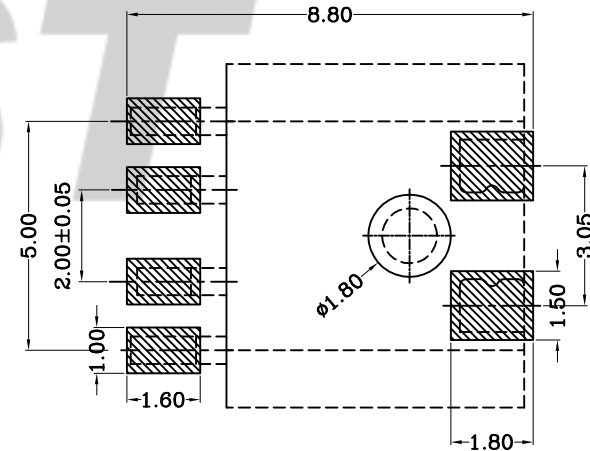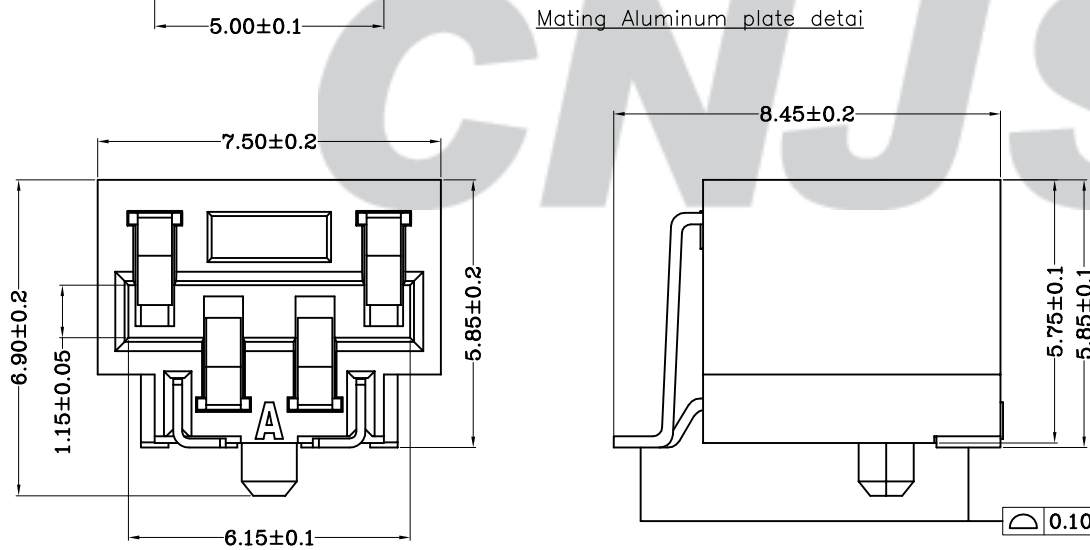

SUGGESTED PCB LAYOUT
(TOP VIEW)

专利产品

B/O	2016.04.18	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.
1			

③	Solder Tab	2	Brass	Mattn Sn
②	Material	4	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP (UL94V-0)	Nature (Beige)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

Model Name:	2.00-1.50mm pitch 90° SMT TYPE
Model No.:	TD201501MB-04-F2MB-R
SCALE:	FULL
REVISION:	B/0

Drawn:	蔡忠忠 2016.04.18
Checked:	林旭芝
Approved:	刘祚杰

UNIT:	mm
CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
DWG NO.	CNJST/GCCP-0442