



RoHS Compliant

成品图

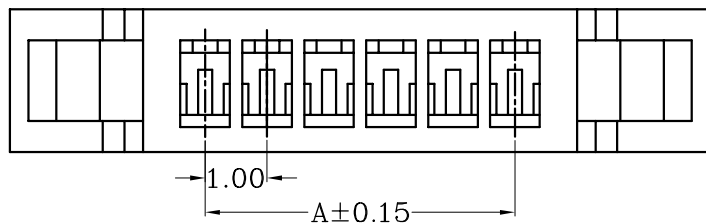

SPECIFICATION



- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1018Y-\*\*-A6W-P

PART No: \_\_\_\_\_  
 No. OF CIRCUITS: \_\_\_\_\_  
 02~20  
 PLASTIC MATERIAL: \_\_\_\_\_  
 A6W=PA66 (WHITE)

PACKAGING: P=PE

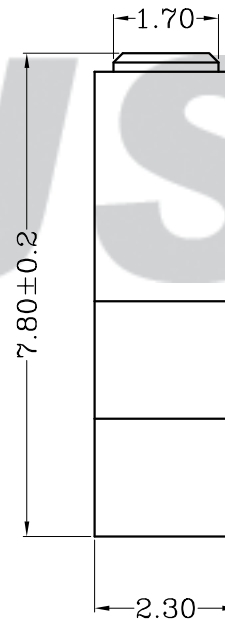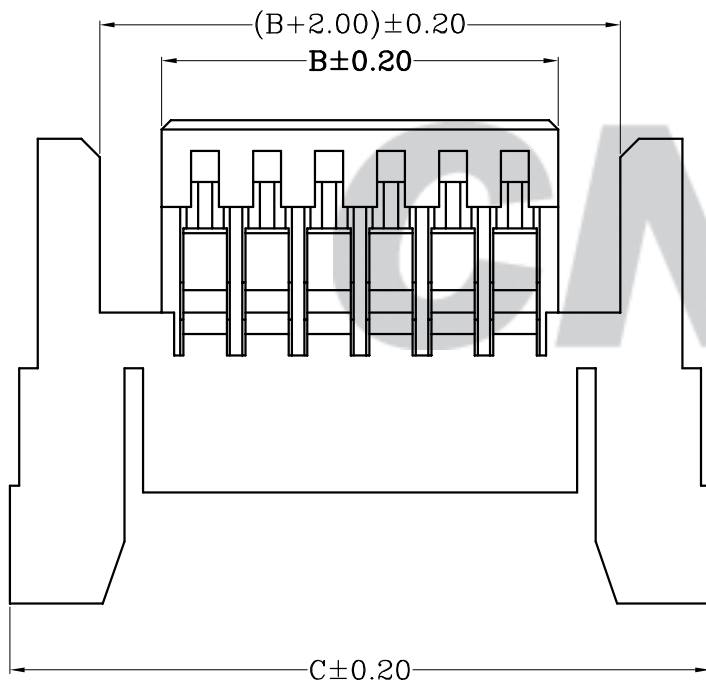

Circuits	Dimensions		
	A	B	C
02	1.00	2.40	7.30
03	2.00	3.40	8.30
04	3.00	4.40	9.30
05	4.00	5.40	10.30
06	5.00	6.40	11.30
07	6.00	7.40	12.30
08	7.00	8.40	13.30
09	8.00	9.40	14.30
10	9.00	10.40	15.30
11	10.00	11.40	16.30
12	11.00	12.40	17.30
13	12.00	13.40	18.30
14	13.00	14.40	19.30
15	14.00	15.40	20.30
16	15.00	16.40	21.30
17	16.00	17.40	22.30
18	17.00	18.40	23.30
19	18.00	19.40	24.30
20	19.00	20.40	25.30

Unit:mm

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00 Pitch Housig Model No: A1018Y-**-A6W-P	Drawn: 张育斌 2016.05.17
UNIT: mm	SCALE: FULL REVISION: B/0	Checked: 林旭芝
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0451

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White