

RoHS Compliant

成品图

SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$



ORDER INFORMATION:

**A1018AWR-\*\*-C1MB-R-X**





PART No. \_\_\_\_\_ X=Cap  
 No. OF CIRCUITS: \_\_\_\_\_ PACKAGING: \_\_\_\_\_  
 02~15 R=REEL  
 PLASTIC MATERIAL: \_\_\_\_\_ PLATING: \_\_\_\_\_  
 C1M=FR52 (Nature) B=Matte Sn

Circuits	Dimensions			
	A	B	C	D
02	1.00	5.10	2.50	3.20
03	2.00	6.10	3.50	4.20
04	3.00	7.10	4.50	5.20
05	4.00	8.10	5.50	6.20
06	5.00	9.10	6.50	7.20
07	6.00	10.10	7.50	8.20
08	7.00	11.10	8.50	9.20
09	8.00	12.10	9.50	10.20
10	9.00	13.10	10.50	11.20
11	10.00	14.10	11.50	12.20
12	11.00	15.10	12.50	13.20
13	12.00	16.10	13.50	14.20
14	13.00	17.10	14.50	15.20
15	14.00	18.10	15.50	16.20

Unit: mm

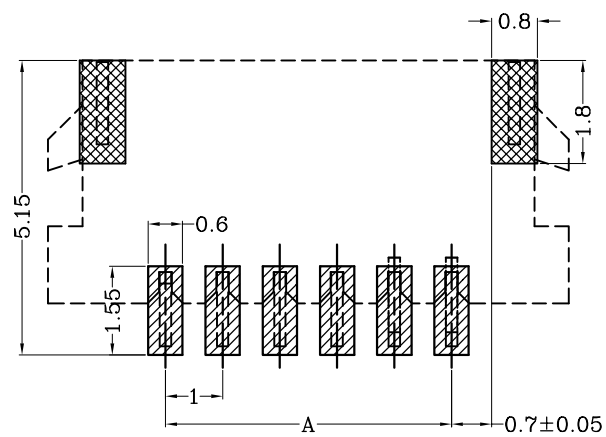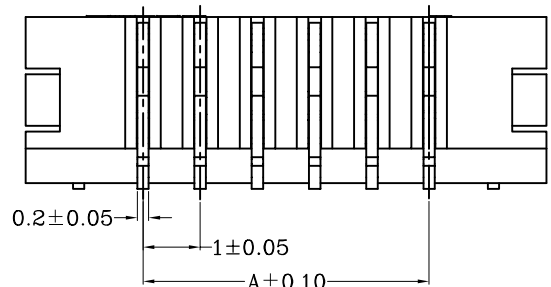

PCB LAYOUT

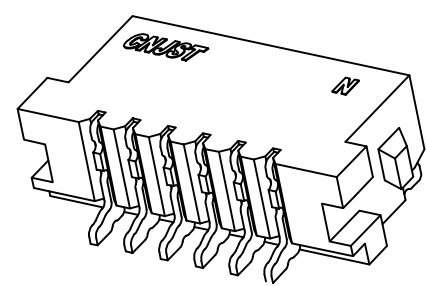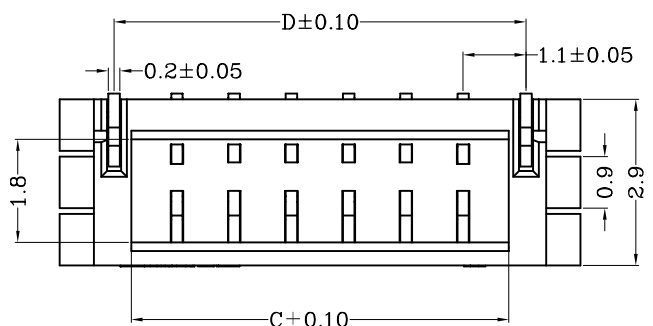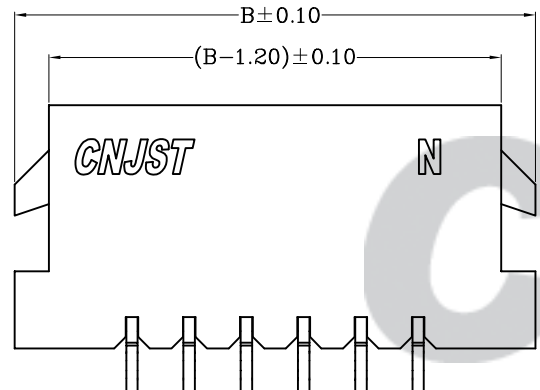

④	Cap	1	LCP (UL94V-0)	Nature
③	Solder Tab	2	Phosphor Bronze	Mattn Sn
②	Material	02~15	Phosphor Bronze	Mattn Sn
①	Insulator	1	FR52 (UL94V-0)	Nature
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance  
 X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 Angle ±3.0°  
 UNIT: mm

Model Name: 1.00mm Pitch 180° Wafer With Lock-SMT TYPE  
 Model No: A1018AWR-\*\*-C1MB-R-X  
 SCALE: FULL REVISION: B/0  
**CNJST** 浙江捷仕泰电子有限公司  
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 张育斌 2016.05.17  
 Checked: 林旭芝  
 Approved: 刘祚杰  
 DWG NO. CNJST/GCCP-0416

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	