

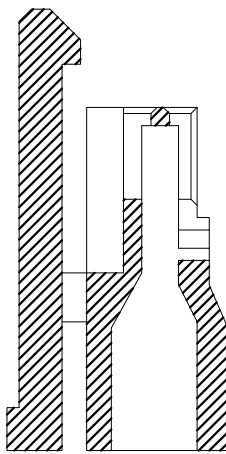


RoHS Compliant

成品图

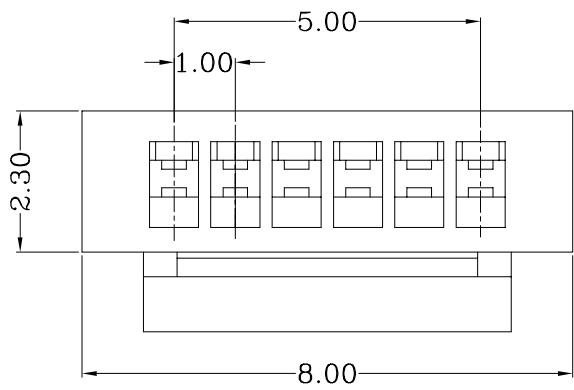

SPECIFICATION



- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1017Y--A6W-P**

PART No.:		PACKAGING:	
No. OF CIRCUITS:	02~20	P=PE	
PLASTIC MATERIAL:	A6W=PA66 (WHITE)		

SECTION A-A

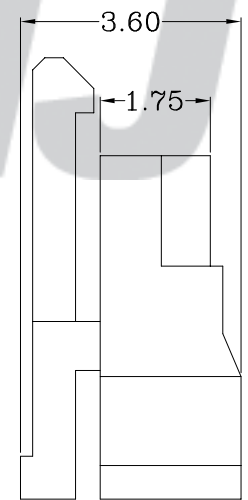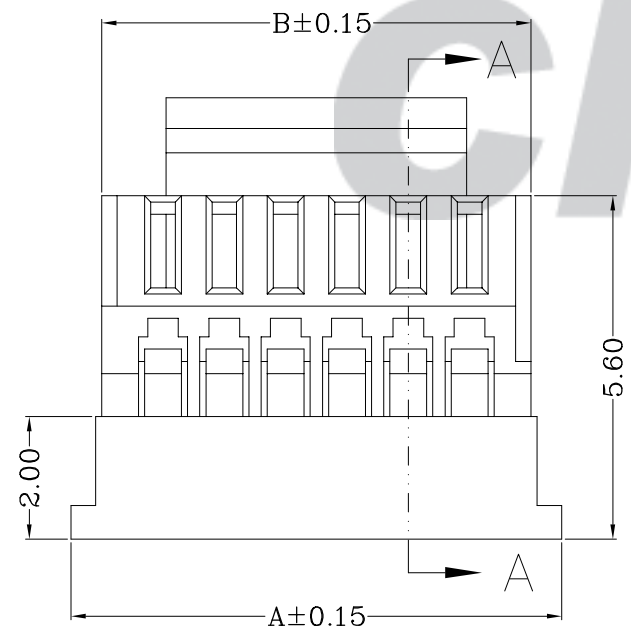

Circuits	Dimensions		
	A	B	C
02	1.00	3.00	4.00
03	2.00	4.00	5.00
04	3.00	5.00	6.00
05	4.00	6.00	7.00
06	5.00	7.00	8.00
07	6.00	8.00	9.00
08	7.00	9.00	10.00
09	8.00	10.00	11.00
10	9.00	11.00	12.00
11	10.00	12.00	13.00
12	11.00	13.00	14.00
13	12.00	14.00	15.00
14	13.00	15.00	16.00
15	14.00	16.00	17.00
16	15.00	17.00	18.00
17	16.00	18.00	19.00
18	17.00	19.00	20.00
19	18.00	20.00	21.00
20	19.00	21.00	22.00

Tolerance	Model Name: 1.00 Pitch Single Row Housig	Drawn: 张育斌 2016.05.17
X.X ±0.30	Model No: A1017Y-**-A6W-P	Checked: 林旭芝
X.XX ±0.20	SCALE: FULL REVISION: B/0	
X.XXX ±0.10		UNIT: mm
Angle ±3.0°	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
		DWG NO. CNJST/GCCP-0445

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White