



RoHS Compliant

成品图



Circuits	Dimensions		
	A	B	C
02	1.00	2.50	3.70
03	2.00	3.50	4.70
04	3.00	4.50	5.70
05	4.00	5.50	6.70
06	5.00	6.50	7.70
07	6.00	7.50	8.70
08	7.00	8.50	9.70
09	8.00	9.50	10.70
10	9.00	10.50	11.70
11	10.00	11.50	12.70
12	11.00	12.50	13.70
13	12.00	13.50	14.70
14	13.00	14.50	15.70
15	14.00	15.50	16.70
16	15.00	16.50	17.70
17	16.00	17.50	18.70
18	17.00	18.50	19.70
19	18.00	19.50	20.70
20	19.00	20.50	21.70

Unit: mm

SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1009AWV-\*\*-C1MB-R-X

PART No. \_\_\_\_\_






No. OF CIRCUITS: \_\_\_\_\_ X=Cap

02~20 \_\_\_\_\_ -PACKAGING:


\_\_\_\_\_ R=Reel

PLASTIC MATERIAL: \_\_\_\_\_ PLATING:

C1M=FR52(Nature) \_\_\_\_\_ B=Matte Sn

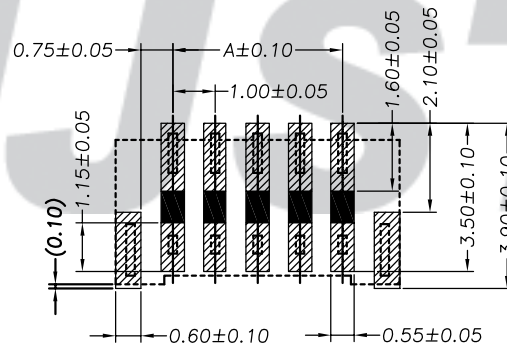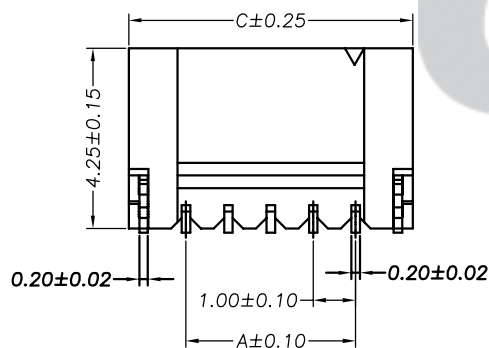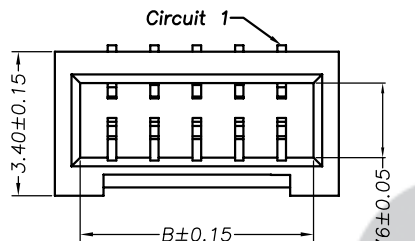

PCB LAYOUT 1

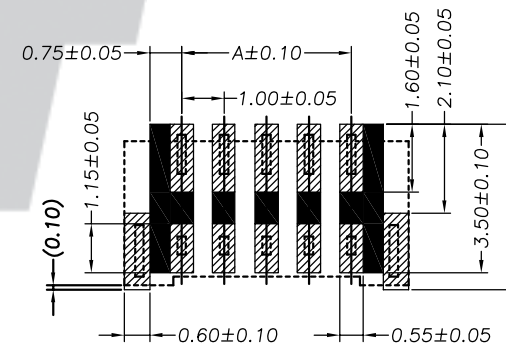

PCB LAYOUT 2

专利产品

B/0	2016.04.12	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.
1			

③	Solder Tab	2	Phosphor Bronze	Matte Sn
②	Contacts	2~20	Phosphor Bronze	Matte Sn
①	Insulator	1	FR52(UL94V-0)	Nature(Beige)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm PITCH 180° WAFER-SMT TYPE	Drawn: 蔡忠忠 2016.05.10
	Model No: A1009AWV-**-C1MB-R-X	
UNIT: mm	SCALE: FULL	REVISION: B/0
<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD		Checked: 林旭芝 Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0276