


RoHS Compliant

成品图

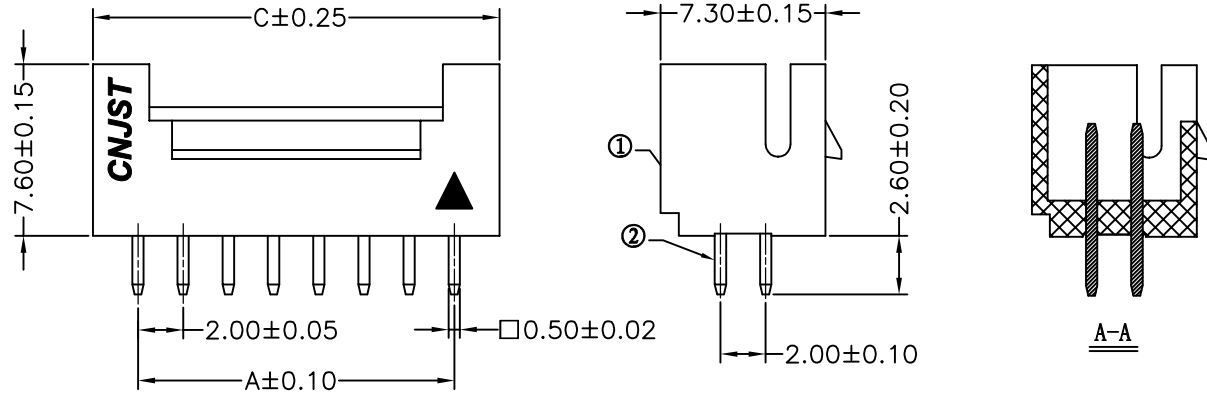




SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2009A-*-A1MA-B-D**

PART No. | D=Shorter PIN (L=2.60)
 No. OF CIRCUITS: | PACKAGING: B=TRAY
 2X2~2X20 | PLATING: A=Tin-Plated
 PLASTIC MATERIAL: |
 A1M=PA66 (Beige)

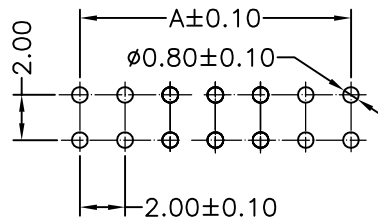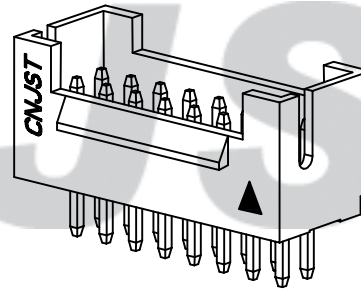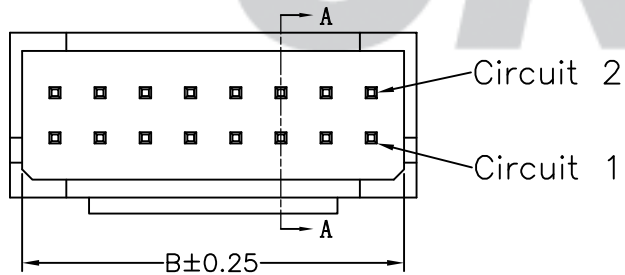

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)		
	A	B	C
202 (2X2)	2.00	4.90	6.00
203 (2X3)	4.00	6.90	8.00
204 (2X4)	6.00	8.90	10.00
205 (2X5)	8.00	10.90	12.00
206 (2X6)	10.00	12.90	14.00
207 (2X7)	12.00	14.90	16.00
208 (2X8)	14.00	16.90	18.00
209 (2X9)	16.00	18.90	20.00
210 (2X10)	18.00	20.90	22.00
211 (2X11)	20.00	22.90	24.00
212 (2X12)	22.00	24.90	26.00
213 (2X13)	24.00	26.90	28.00
214 (2X14)	26.00	28.90	30.00
215 (2X15)	28.00	30.90	32.00
216 (2X16)	30.00	32.90	34.00
217 (2X17)	32.00	34.90	36.00
218 (2X18)	34.00	36.90	38.00
219 (2X19)	36.00	38.90	40.00
220 (2X20)	38.00	40.90	42.00

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/O	2016.06.11	NEW RELEASE		②	Contacts	4~40	Brass (H65)	Tin-Plated
				①	Insulator	1	PA66 (UL94V-0)	Beige

Tolerance
 X.X ± 0.30
 X.XX ± 0.20
 X.XXX ± 0.10
 Angle $\pm 3.0^{\circ}$

Model Name: 2.00mm PITCH 180 ° WAFER
 Model No: A2009A-***-A1MA-B-D

SCALE: FULL REVISION: B/0

UNIT: mm

CNJST 浙江捷仕泰电子有限公司
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.06.11
 Checked: 林旭芝
 Approved: 刘祚杰
 DWG NO. CNJST/GCCP-0205