
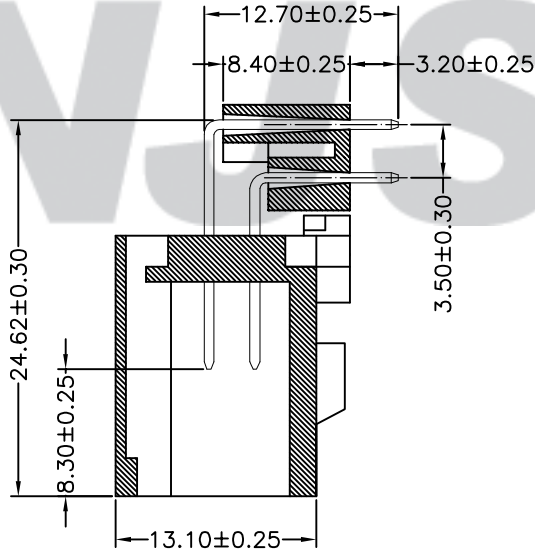
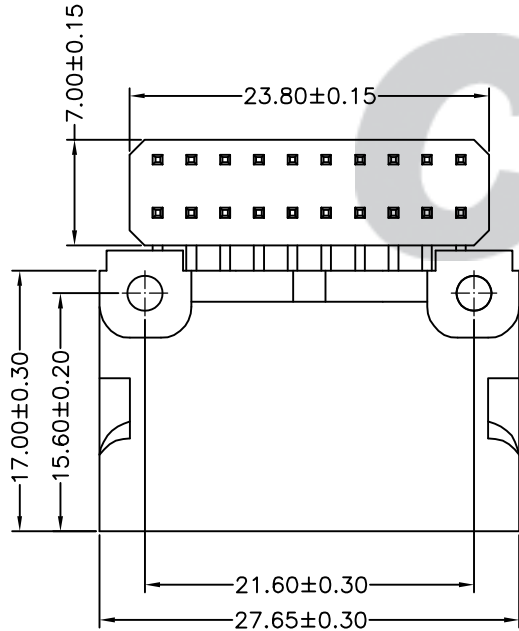


RoHS Compliant

成品图

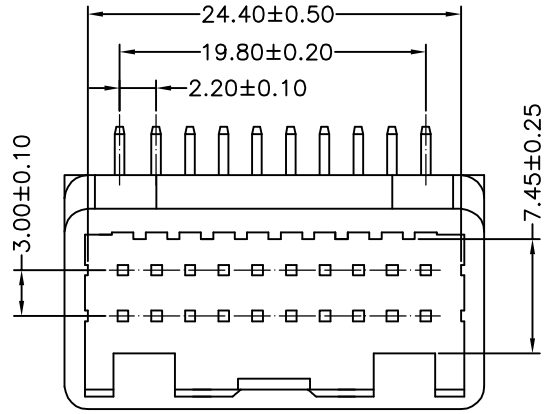


SPECIFICATION

- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 500M\Omega$
- 3 Rated voltage: 6 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 8 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A2201AW-210-A5WA-P**

|                   |  |              |
|-------------------|--|--------------|
| PART No.          |  | PACKAGING:   |
| No. OF CIRCUITS:  |  | P=PE         |
| 2X10              |  | PLATING:     |
| PLASTIC MATERIAL: |  | A=Tin-plated |
| A5W=PA66 (White)  |  |              |

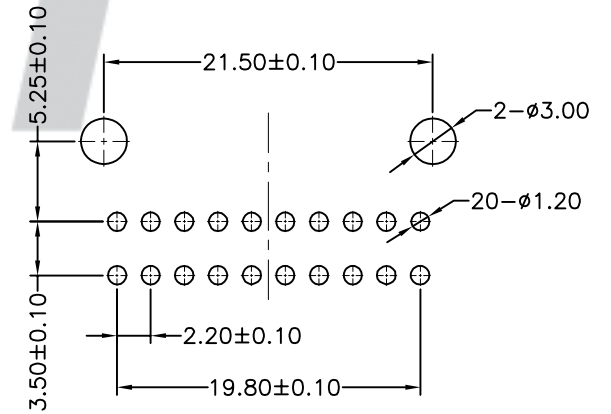

SUGGESTED PCB LAYOUT

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Tolerance<br>X.X ±0.30<br>X.XX ±0.20<br>X.XXX ±0.10<br>Angle ±3.0° | Model Name: 2.20mm pitch 90° WAFER | Drawn: 张育斌 2016.05.21   |
|  | Model No: A2201AW-210-A5WA-P       |                         |
| UNIT: mm   | SCALE: FULL                        | REVISION: B/0           |
|  | Checked: 林旭芝                       |                         |
| Approved: 刘祚杰  |                                    | DWG NO. CNJST/GCCP-0322 |
| <b>CNJST</b> 浙江捷仕泰电子有限公司<br>ZHEJIANG JIESHITAI ELECTRONIC CO., LTD |                                    |                         |

|      |            |             |       |
|------|------------|-------------|-------|
| B/0  | 2016.04.12 | NEW RELEASE |       |
| REV. | DATE       | DESCRIPTION | APPD. |
| 1    | 2          | 3           | 4     |

|     |             |     |                |               |
|-----|-------------|-----|----------------|---------------|
| ②   | Contacts    | 20  | Brass          | Tin-plated    |
| ①   | Insulator   | 1   | PA66 (UL94V-0) | White         |
| NO. | DESCRIPTION | QTY | MATERIAL       | PLATING/COLOR |
| 1   | 2           | 3   | 4              | 5             |