RoHS Compliant

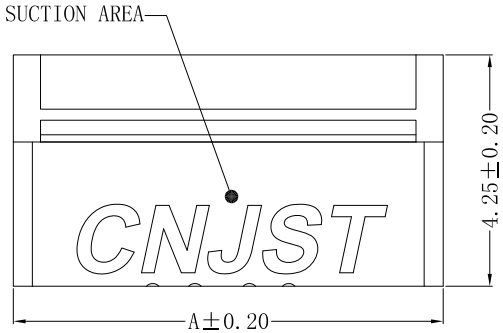

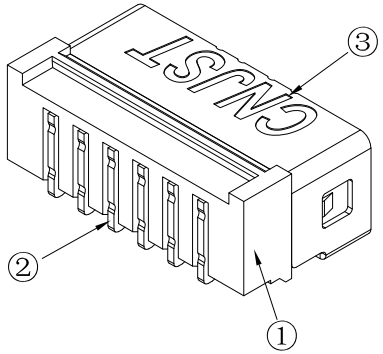

SPECIFICATION

1 Contact resistance: ≤20mΩ
2 Insulation resistance: ≥100MΩ
3 Rated voltage: 150 V AC DC
4 Rated current: 1.0 A AC DC
5 Withstand Voltage: 500V AC/minute
6 Temperature Range:-25℃～+85℃

ORDER INFORMATION:

A1012AWRR-**-F2MB-R-H

PART No.
No. OF CIRCUITS: 02～12
PLASTIC MATERIAL: F2M=LCP(NATURE)
PLATING: A=Tin-plated B=Matte Sn
PACKAGING: R=REEL

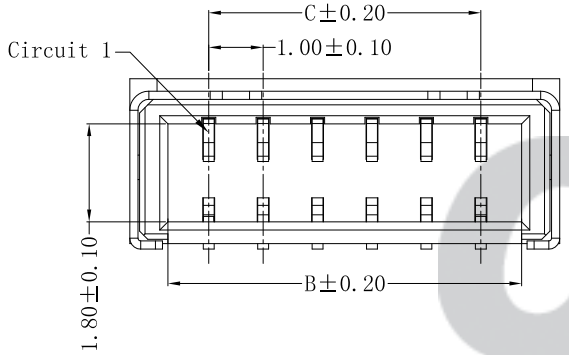

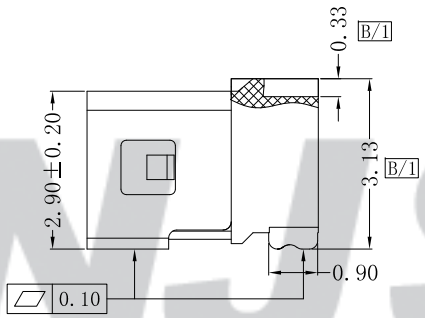

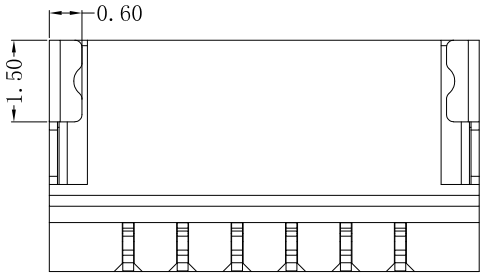

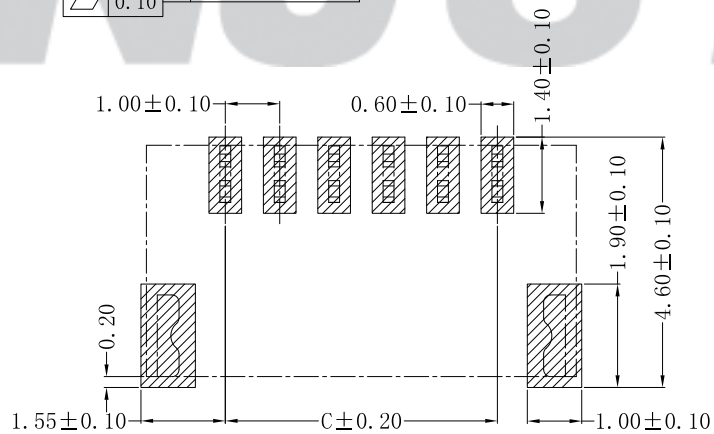

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions(mm)		
	A	B	C
02	3.90	2.50	1.00
03	4.90	3.50	2.00
04	5.90	4.50	3.00
05	6.90	5.50	4.00
06	7.90	6.50	5.00
07	8.90	7.50	6.00
08	9.90	8.50	7.00
09	10.90	9.50	8.00
10	11.90	10.50	9.00
11	12.90	11.50	10.00
12	13.90	12.50	11.00

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022.08.19	统一标准 更新模版	王丽君	③	Solder Tab	1	Phosphor Bronze	Matte Sn
B/1	2021.03.26	挂钩优化,ECR:JST2021004	黄羡程	②	Contacts	2～12	Phosphor Bronze	Matte Sn
B/0	2018.08.21	NEW RELEASE	黄金林	①	Insulator	1	LCP	Nature

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

CNJST 捷仕泰企业

Model No.: A1012AWRR-**-F2MB-R-H

Model Name: 1.00mm PITCH 90° WAFER-SMT TYPE

SCALE:FULL

REVISION: C/0

Drawn: 王丽君 2022.08.19
Checked: 吴丹平
Approved: 林旭芝
DWG NO. CNJST/GCCP-0391