
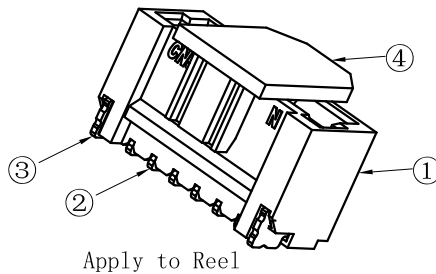


RoHS Compliant



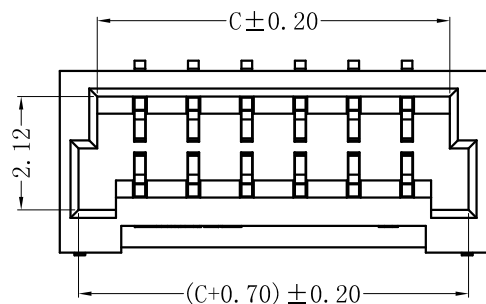


SPECIFICATION


- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 100\text{M}\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

A1017AWV-**-F2MB-R-X			
PART No.			X=Cap
No. OF CIRCUITS:			PACKAGING:
02~20			R=REEL
PLASTIC MATERIAL:			PLATING:
F2M=LCP (Nature)			B=Matte Sn

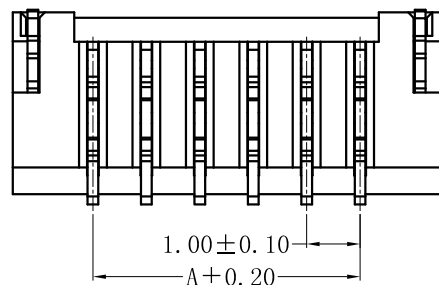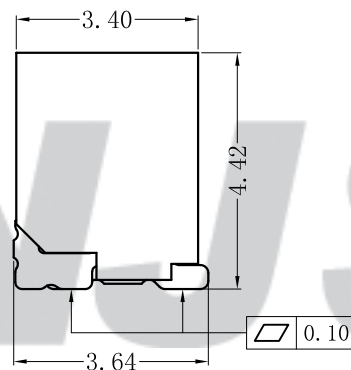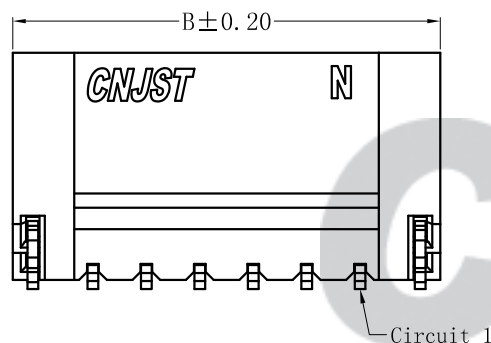

Circuits	Dimensions			Circuits	Dimensions		
	A	B	C		A	B	C
02	1.00	4.00	2.60	12	11.00	14.00	12.60
03	2.00	5.00	3.60	13	12.00	15.00	13.60
04	3.00	6.00	4.60	14	13.00	16.00	14.60
05	4.00	7.00	5.60	15	14.00	17.00	15.60
06	5.00	8.00	6.60	16	15.00	18.00	16.60
07	6.00	9.00	7.60	17	16.00	19.00	17.60
08	7.00	10.00	8.60	18	17.00	20.00	18.60
09	8.00	11.00	9.60	19	18.00	21.00	19.60
10	9.00	12.00	10.60	20	19.00	22.00	20.60
11	10.00	13.00	11.60				

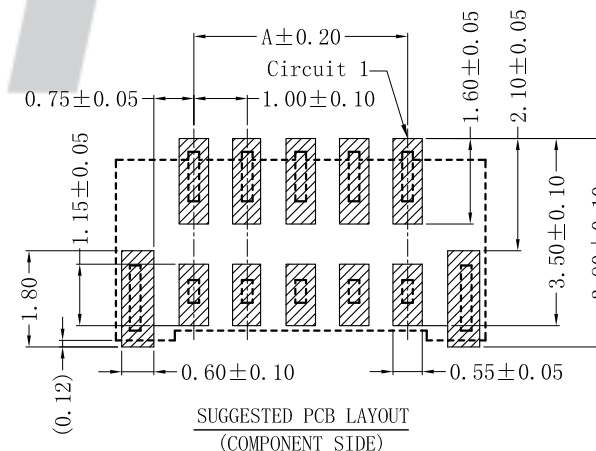

专利产品

C/O	2022. 12. 09	统一标准 更新模板	王丽君	④	Cap	1	LCP (UL94V-0)	Nature
				③	Solder Tab	2	Phosphor Bronze	Matte Sn
				②	Contacts	2~20	Phosphor Bronze	Matte Sn
				①	Insulator	1	LCP (UL94V-0)	Nature
				NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR


Tolerance
X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
Angle ± 3.0°

CNJST 捷仕泰企业

Model No. : A1017AWV-**-F2MB-R-X

Model Name: 1.00mm Pitch 180° Single Row Wafer With Lock-SMT TYPE

UNIT: mm



SCALE: FULL

REVISION: C/0

Drawn: 王丽君 2022. 12. 09

Checked: 吴丹平

Approved: 林旭芝

DWG NO. CNJST/GCCP-0407