
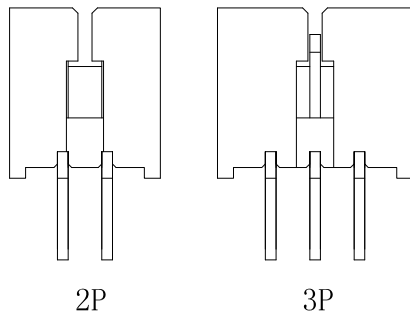


RoHS Compliant

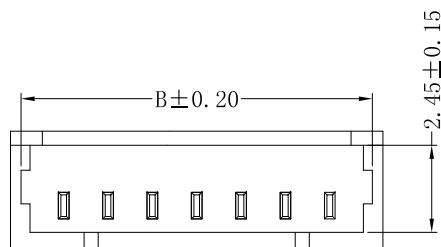

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 100\text{M}\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 250V AC/minute
- 6 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

A1251A-**-B1MA-A

PART No. _____

No. OF CIRCUITS: _____




02~16

PLASTIC MATERIAL: _____


B1M=PA46 (Nature)

PACKAGING:
A=TRAY

PLATING:
A=Tin-plated

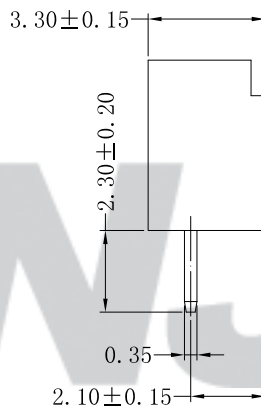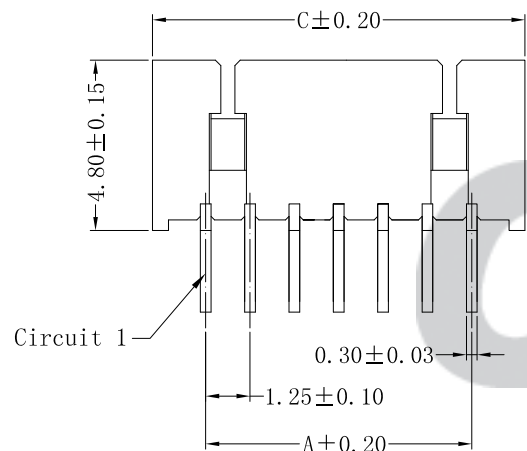

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

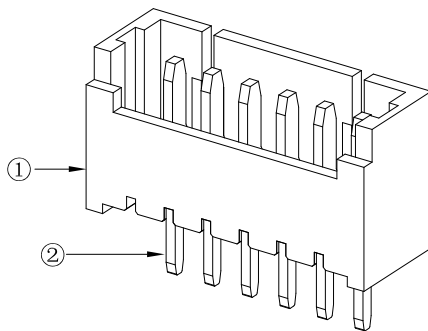

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
02	1.25	3.65	4.25	10	11.25	13.65	14.25
03	2.50	4.90	5.50	11	12.50	14.90	15.50
04	3.75	6.15	6.75	12	13.75	16.15	16.75
05	5.00	7.40	8.00	13	15.00	17.40	18.00
06	6.25	8.65	9.25	14	16.25	18.65	19.25
07	7.50	9.90	10.50	15	17.50	19.90	20.50
08	8.75	11.15	11.75	16	18.75	21.15	21.75
09	10.00	12.40	13.00				

专利产品


Tolerance
X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
Angle $\pm 3.0^{\circ}$

UNIT: mm

CNJST 捷仕泰企业

Model No.: A1251A-**-B1MA-A

Model Name: 1.25mm PITCH 180° WAFER



SCALE: FULL

REVISION: C/0

Drawn: 王丽君 2022.07.15

Checked: 吴丹平

Approved: 林旭芝

DWG NO. CNJST/GCCP-0026

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022.07.15	统一标准 更新模版	王丽君	②	Contacts	2~16	Phosphor Bronze	Tin-plated
B/0	2021.06.15	NEW RELEASE	王程伟	①	Insulator	1	PA46 (UL94V-0)	Nature