


RoHS Compliant

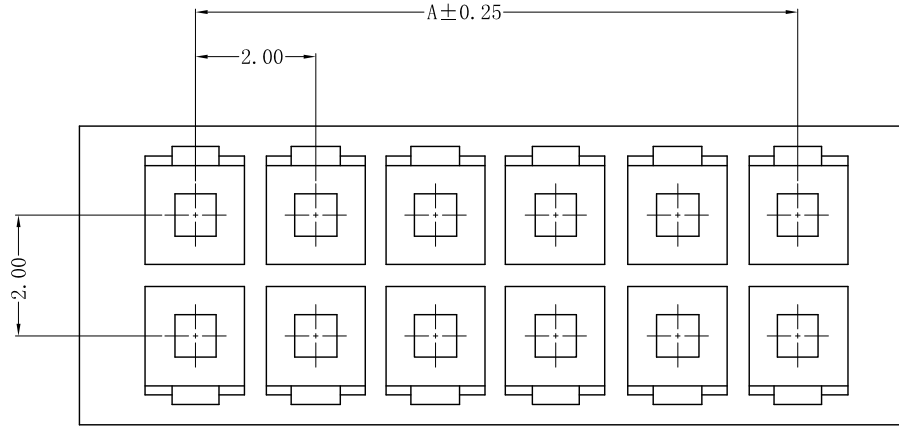



SPECIFICATION

- 1 Contact resistance: $\leq 10m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2002Y-*-A6W-P**

PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 2X2~2X20	PLASTIC MATERIAL: A6W=PA66 (WHITE)

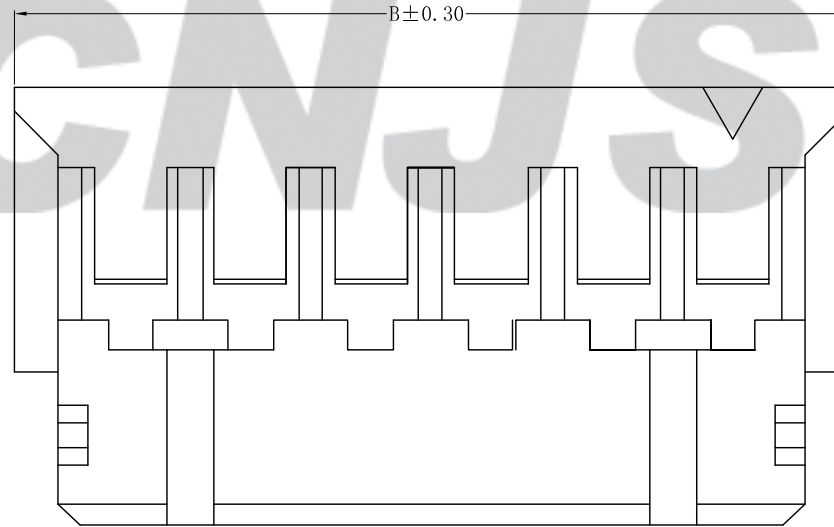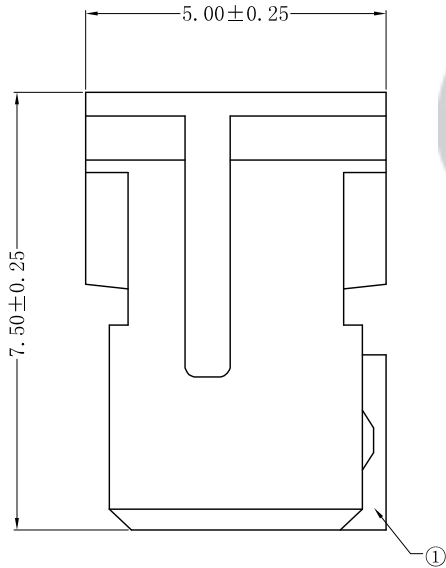

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
202 (2X2)	2.00	6.00	212 (2X12)	22.00	26.00
203 (2X3)	4.00	8.00	213 (2X13)	24.00	28.00
204 (2X4)	6.00	10.00	214 (2X14)	26.00	30.00
205 (2X5)	8.00	12.00	215 (2X15)	28.00	32.00
206 (2X6)	10.00	14.00	216 (2X16)	30.00	34.00
207 (2X7)	12.00	16.00	217 (2X17)	32.00	36.00
208 (2X8)	14.00	18.00	218 (2X18)	34.00	38.00
209 (2X9)	16.00	20.00	219 (2X19)	36.00	40.00
210 (2X10)	18.00	22.00	220 (2X20)	38.00	42.00
211 (2X11)	20.00	24.00			

专利产品

Tolerance X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10 Angle $\pm 3.0^{\circ}$	CNJST 捷仕泰企业		Drawn: 王程伟 2022.07.19
	Model No.: A2002Y-***-A6W-P		Checked: 吴丹平
	Model Name: 2.00mm PITCH HOUSING		Approved: 林旭芝
	UNIT: mm	 SCALE: FULL	REVISION: C/0 DWG NO. CNJST/GCCP-0057

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022.07.19	更新图框	王程伟					
B/0	2019.07.27	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White