


RoHS Compliant

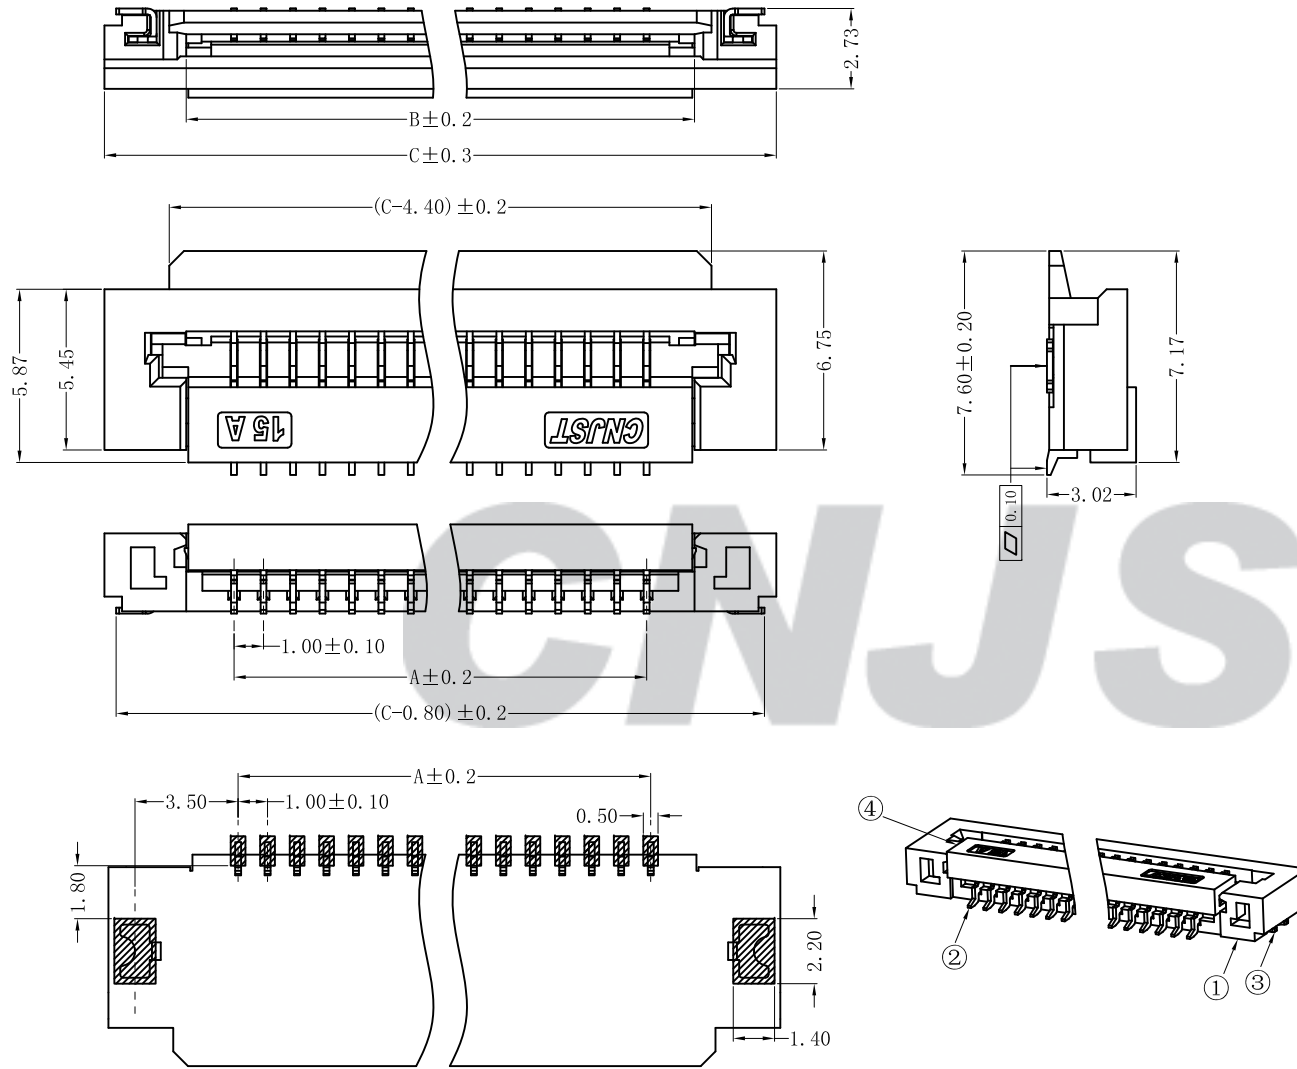

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

SPECIFICATION


- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 0.5A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

F1015AWR--F2ME-R**

PART No.:		PACKAGING:	
No. OF CIRCUITS:		R=REEL	
05~20		PLATING:	
PLASTIC MATERIAL:		E=Gold+Matte Sn	
F2M=LCP (Locker:LCP)			

Circuits	Dimensions (mm)		
	A	B	C
05	4.00	7.25	12.80
10	9.00	12.25	17.80
15	14.00	17.25	22.80
20	19.00	22.25	27.80

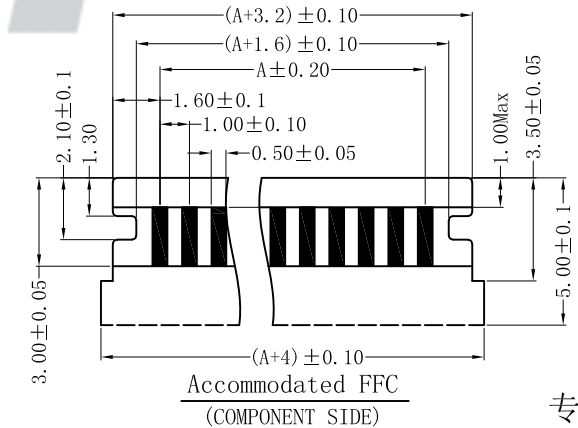

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/O	2023.01.03	更新模板	李浩然	④	Locker	1	LCP (UL94V-0)	Black
B/O	2018.08.22	NEW RELEASE		③	Solder Tab	2	Brass	Matte Sn
				②	Contacts	5~20	Phosphor Bronze	Gold+Matte Sn
				①	Insulator	1	LCP (UL94V-0)	Nature

Tolerance	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°
UNIT:	mm

CNJST 捷仕泰企业

Model No.: F1015AWR-**-F2ME-R

Model Name: 1.00mm pitch 90° FFC/FPC TYPE

SCALE: FULL REVISION: C/0

Drawn: 李浩然 2023.01.03
Checked: 吴丹平
Approved: 林旭芝
DWG NO.: CNJST/GCCP-0482