
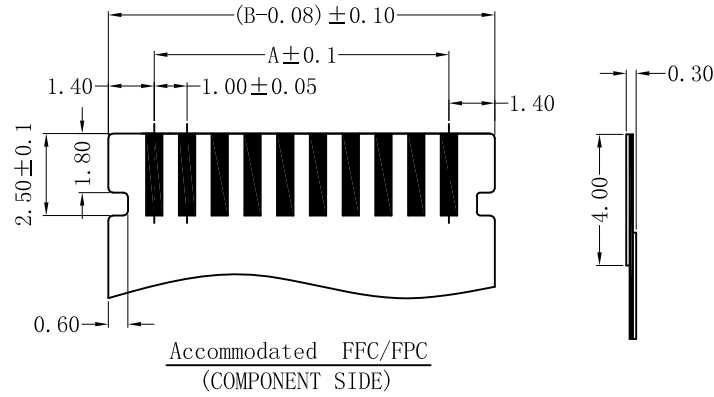







RoHS Compliant

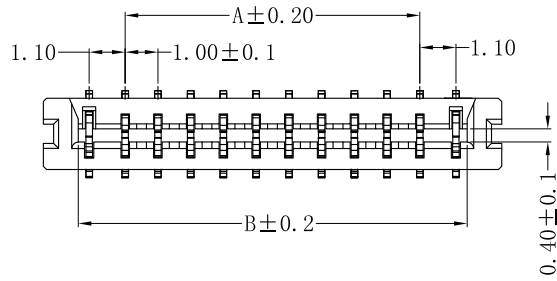

SPECIFICATION


- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 500M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 0.5A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

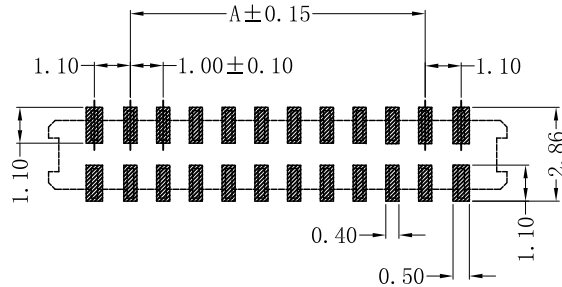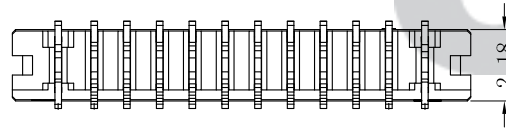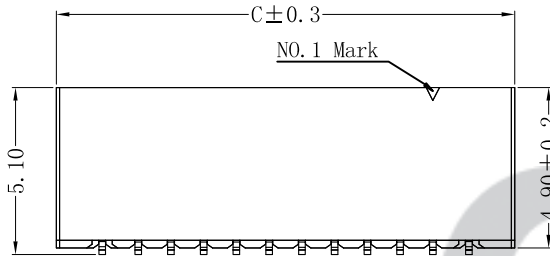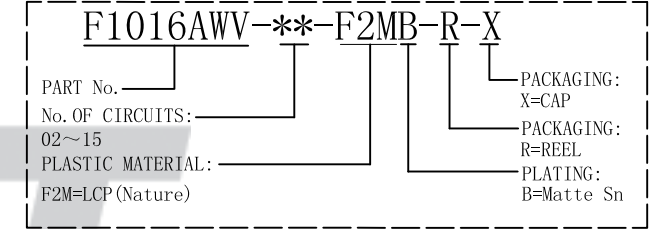

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
2P	1.00	3.88	6.00	9P	8.00	10.88	13.00
3P	2.00	4.88	7.00	10P	9.00	11.88	14.00
4P	3.00	5.88	8.00	11P	10.00	12.88	15.00
5P	4.00	6.88	9.00	12P	11.00	13.88	16.00
6P	5.00	7.88	10.00	13P	12.00	14.88	17.00
7P	6.00	8.88	11.00	14P	13.00	15.88	18.00
8P	7.00	9.88	12.00	15P	14.00	16.88	19.00

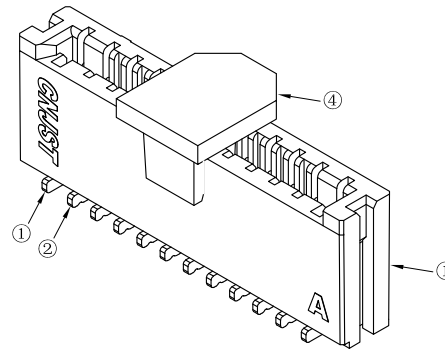

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/O	2023.01.03	更新模板	李浩然	④	Cap	1	LCP(UL94V-0)	Nature
B/O	2018.08.22	NEW RELEASE		③	Solder Tab	2	Brass	Matte Sn
				②	Contacts	2~15	Phosphor Bronze	Matte Sn
				①	Insulator	1	LCP(UL94V-0)	Nature

Tolerance	X.X ±0.30
	X.XX ±0.20
	X.XXX ±0.10
Angle	±3.0°
UNIT:	mm

**CNJST 捷仕泰企业**

Model No.: F1016AWV-\*\*-F2MB-R-X

Model Name: 1.00mm PITCH 180° WAFER-FFC/FPC TYPE

SCALE: FULL REVISION: C/0

Drawn: 李浩然 2023.01.03
Checked: 吴丹平
Approved: 林旭芝
DWG NO.: CNJST/GCCP-0487