RoHS Compliant

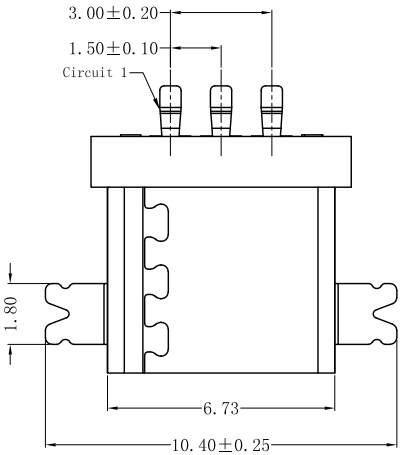

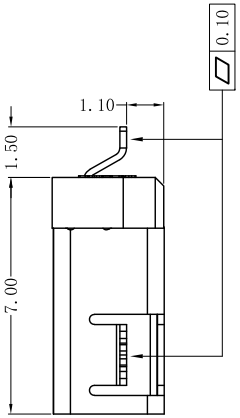

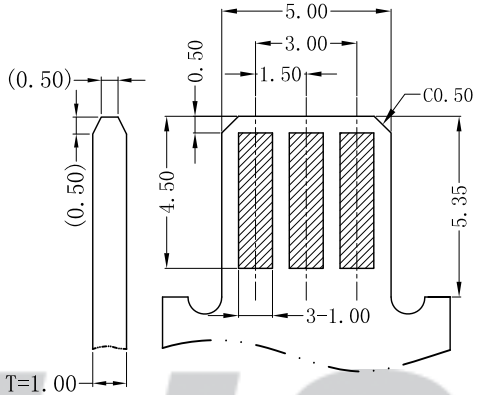

SUGGESTED BOARD LAYOUT(T=1.00mm)
(COMPONENT SIDE TOLERANCE =±0.05)

SPECIFICATION

1 Contact resistance: ≤30mΩ
2 Insulation resistance: ≥500MΩ
3 Rated voltage: 150 V AC DC
4 Rated current: 1.5 A AC DC
5 Withstand Voltage: 500V AC/minute
6 Temperature Range:-25℃～+85℃

ORDER INFORMATION:

X1502AWR-03-F2ME-R-D1.5

- PART No.
- No. OF CIRCUITS: 03
- PLASTIC MATERIAL: F2M=LCP(Nature)
- PACKAGING: R=Reel
- PLATING: E=(Contacts:Matte Sn / Solder Tab:Gold)

CNJST

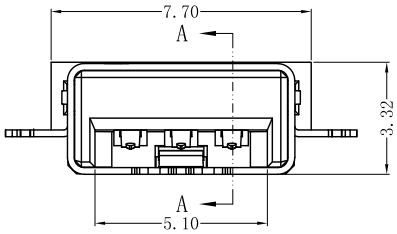



SECTION A-A

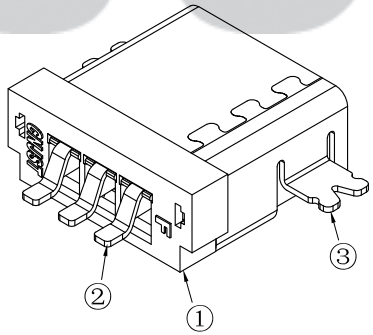

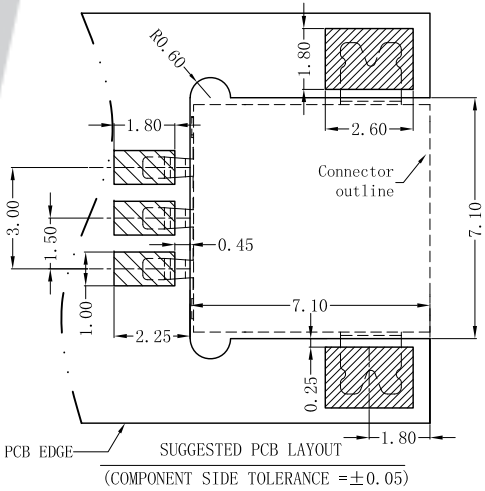

SUGGESTED PCB LAYOUT
(COMPONENT SIDE TOLERANCE =±0.05)

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
				③	Solder Tab	1	SUS 301	Ni+Selective gold plated
C/0	2022.08.15	统一标准，更新模板	王程伟	②	Contacts	3	Phosphor Bronze	Matte Sn
B/0	2022.05.07	NEW RELEASE		①	Insulator	1	LCP(UL94V-0)	Nature

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

CNJST 捷仕泰企业

Model No.:X1502AWR-03-F2ME-R-D1.5

Model Name:1.50mm pitch BTB FEMALE SMT R/A TYPE

SCALE:FULL

REVISION:C/0

Drawn: 王程伟 2022.08.15

Checked: 吴丹平

Approved: 林旭芝

DWG NO.CNJST/GCCP-0564