

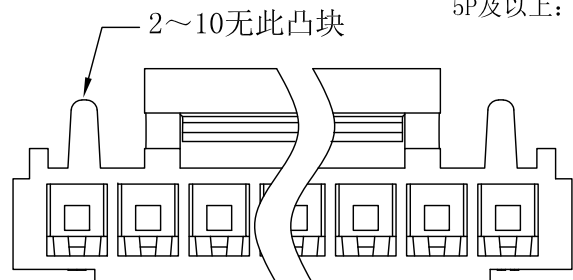
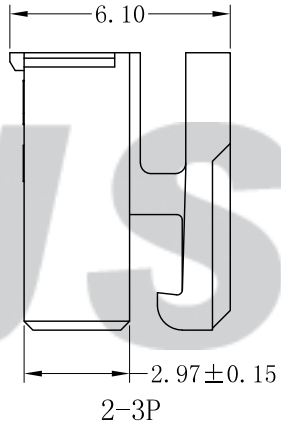
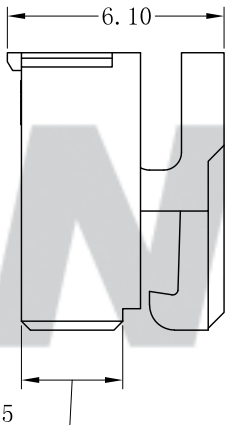
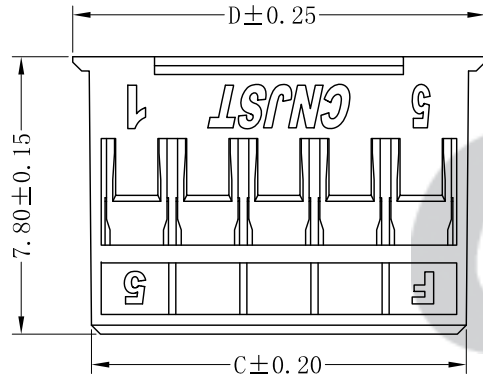




RoHS Compliant

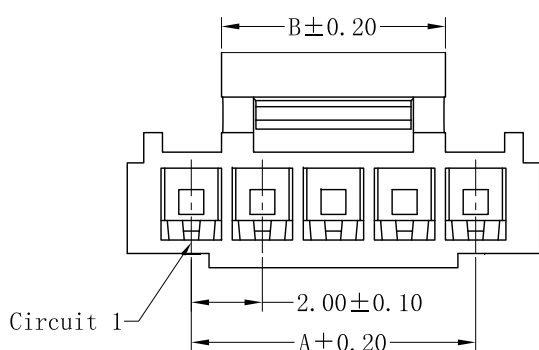

4P: 2.97±0.15
5P及以上: 2.85±0.15

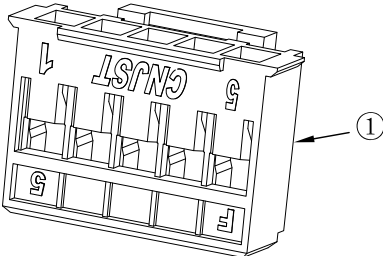

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

A2004Y-**-A6W-P	
PART No.	PACKAGING:
No. OF CIRCUITS:	P=PE
02~16	PLASTIC MATERIAL:
	A6W=PA66 (White)

Circuits	Dimensions (mm)			
	A	B	C	D
02	2.00	3.30	4.60	5.60
03	4.00	3.30	6.60	7.60
04	6.00	4.30	8.60	9.60
05	8.00	6.30	10.60	11.60
06	10.00	8.30	12.60	13.60
07	12.00	10.30	14.60	15.60
08	14.00	12.30	16.60	17.60
09	16.00	12.30	18.60	19.60
10	18.00	12.30	20.60	21.60
11	20.00	16.20	22.60	23.60
12	22.00	16.20	24.60	25.60
13	24.00	16.20	26.60	27.60
14	26.00	16.20	28.60	29.60
15	28.00	16.20	30.60	31.60
16	30.00	16.20	32.60	33.60

专利产品

注: 建议客户优先选择我司公母端产品配套使用, 若在没有使用我司公母端配套产品情况下, 出现因产品不匹配的质量问题, 我司将不承担任何风险及责任。

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

CNJST 捷仕泰企业

Drawn: 王程伟 2022.07.10


Model No.: A2004Y-**-A6W-P

Checked: 吴丹平

Model Name: 2.00mm PITCH HOUSING

Approved: 林旭芝

UNIT: mm



SCALE: FULL

REVISION: C/0

DWG NO. CNJST/GCCP-0064

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022.07.10	更新模板	王程伟					
B/0	2020.12.29	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White