

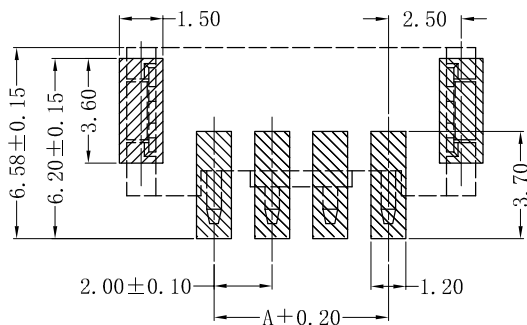

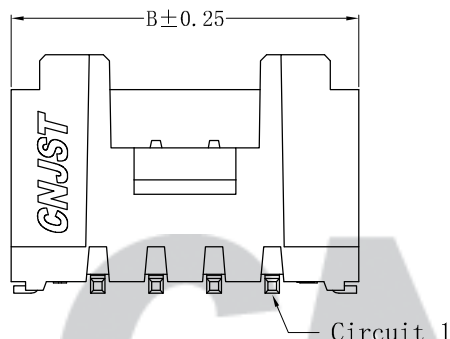





RoHS Compliant

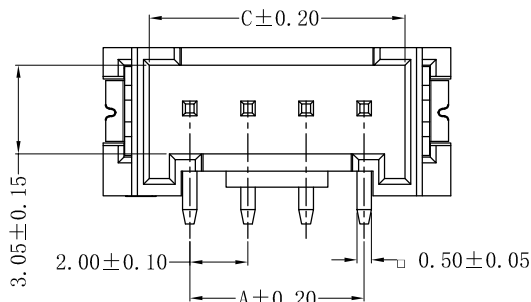

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)



产品平贴后固定PIN、PIN针
与焊接面间隙不大于0.1mm

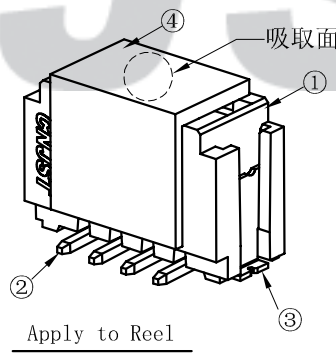

Apply to Reel

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

A2004AWV-**-D1MB-R-X-H			
PART No.		X=Cap	PACKAGING:
No. OF CIRCUITS:		R=Reel	
02~15			
PLASTIC MATERIAL:		PLATING:	
D1M=PA9T (Nature)		B=Matte Sn	

Circuits	Dimensions (mm)		
	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80

注: 建议客户优先选择我司公母端产品配套使用, 若在没有使用我司公母端配套产品
情况下, 出现因产品不匹配的质量问题, 我司将不承担任何风险及责任。

专利产品

C/O	2022.07.10	更新模版	黄美程	④	Cap	1	LCP(UL94V-0)	Nature
				③	Solder Tab	2	Phosphor Bronze	Tin-plated
				②	Contacts	2~15	Brass	Matte Sn
				①	Insulator	1	PA9T(UL94V-0)	Nature
B/O	2020.01.10	NEW RELEASE	徐广	①	Insulator	1	PA9T(UL94V-0)	Nature
REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	
X.X	± 0.30
X.XX	± 0.20
X.XXX	± 0.10
Angle	$\pm 3.0^{\circ}$
UNIT: mm	

CNJST 捷仕泰企业

Model No.: A2004AWV-**-D1MB-R-X-H		
Model Name: 2.00mm pitch 180° WAFER-SMT TYPE		
	SCALE: FULL	REVISION: C/O

Drawn: 黄美程 2022.07.10	
Checked: 吴丹平	
Approved: 林旭芝	
DWG NO. CNJST/GCCP-0277	