RoHS Compliant

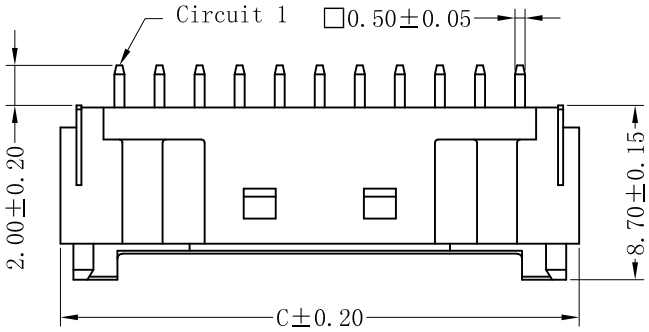

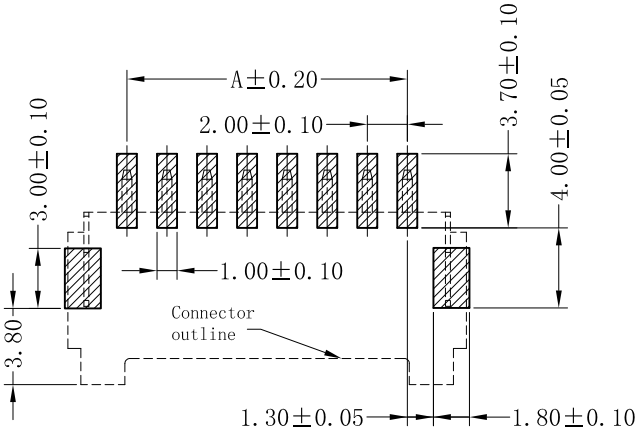

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

SPECIFICATION

1 Contact resistance: ≤10mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 250 V AC DC
4 Rated current: 3.0 A AC DC
5 Withstand Voltage: 800V AC/minute
6 Temperature Range:-40℃～+125℃

ORDER INFORMATION:

A2006AWR-**-D1MA-R

- PART No.
- No. OF CIRCUITS: 02～15
- PLASTIC MATERIAL: D1M=PA9T
- PACKAGING: R=Reel
- PLATING: A=Tin-plated

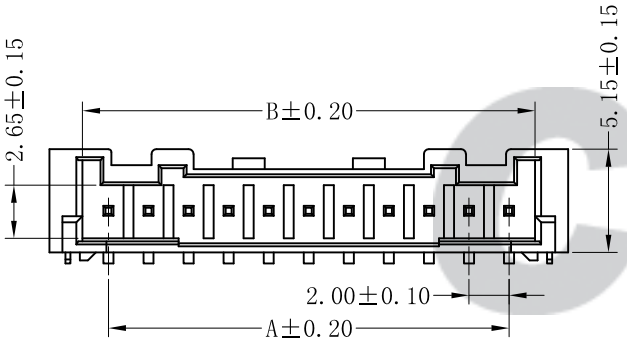





CNJST

Circuits	Dimensions(mm)		
	A	B	C
02	2.00	4.60	7.90
03	4.00	6.60	9.90
04	6.00	8.60	11.90
05	8.00	10.60	13.90
06	10.00	12.60	15.90
07	12.00	14.60	17.90
08	14.00	16.60	19.90
09	16.00	18.60	21.90
10	18.00	20.60	23.90
11	20.00	22.60	25.90
12	22.00	24.60	27.90
13	24.00	26.60	29.90
14	26.00	28.60	31.90
15	28.00	30.60	33.90

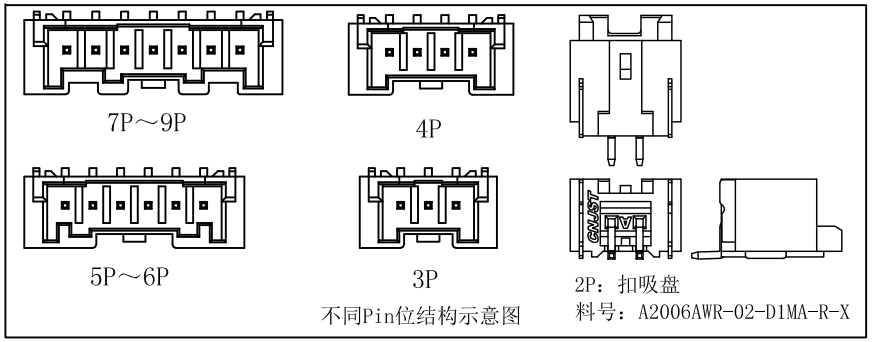

不同Pin位结构示意图

2P：扣吸盘
料号：A2006AWR-02-D1MA-R-X

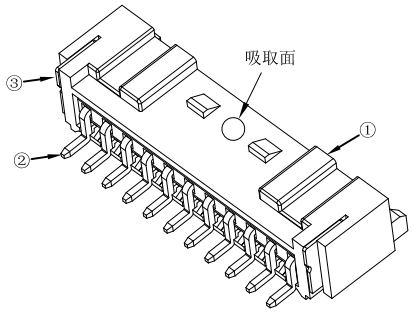

专利产品

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套
产品情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
				③	Solder Tab	2	Brass	Tin-plated
C/0	2022.07.20	更新模板	王程伟	②	Contacts	2～15	Brass	Tin-plated
B/0	2020.01.06	NEW RELEASE		①	Insulator	1	PA9T(UL94V-0)	Nature

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

CNJST 捷仕泰企业

Model No.:A2006AWR-**-D1MA-R

Model Name:2.00mm PITCH 90° WAFER-SMT TYPE

SCALE:FULL

REVISION:C/0

Drawn: 王程伟 2022.07.20

Checked: 吴丹平

Approved: 林旭芝

DWG NO.CNJST/GCCP-0172