

RoHS Compliant

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

A2501AWV-**-F2MA-R-X

PART No.
 No. OF CIRCUITS:
 02~16
 PLASTIC MATERIAL:
 F2M=LCP (Nature)
 X=Cap
 PACKAGING:
 R=Reel
 PLATING:
 A=Tin-Plated

Circuits	Dimensions		
	A	B	C
02	2.50	6.00	10.00
03	5.00	8.50	12.50
04	7.50	11.00	15.00
05	10.00	13.50	17.50
06	12.50	16.00	20.00
07	15.00	18.50	22.50
08	17.50	21.00	25.00
09	20.00	23.50	27.50
10	22.50	26.00	30.00
11	25.00	28.50	32.50
12	27.50	31.00	35.00
13	30.00	33.50	37.50
14	32.50	36.00	40.00
15	35.00	38.50	42.50
16	37.50	41.00	45.00

专利产品

CNJST 捷仕泰企业

Drawn: 王程伟 2022.07.25

Model No.: A2501AWV-**-F2MA-R-X

Checked: 吴丹平

Model Name: 2.50mm pitch 180° WAFER-SMT TYPE








Approved: 林旭芝



SCALE: FULL

REVISION: C/0

DWG NO. CNJST/GCCP-0362

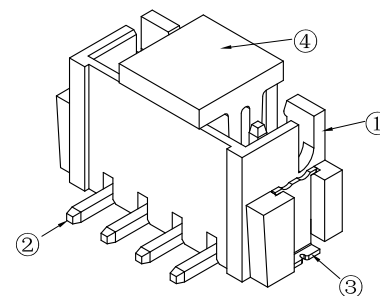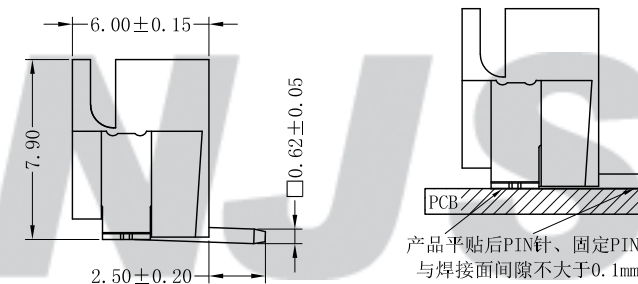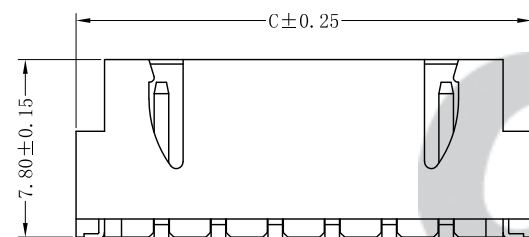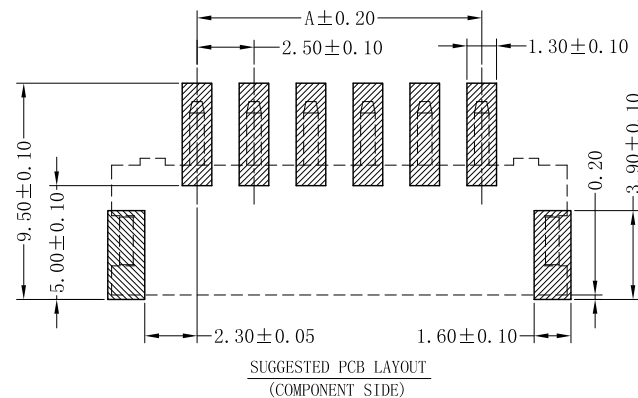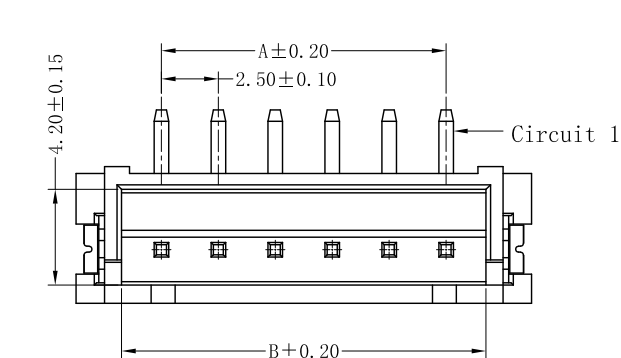

Apply to Reel

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR	UNIT: mm	Model No. : A2501AWV-**-F2MA-R-X	Model Name: 2.50mm pitch 180° WAFER-SMT TYPE	SCALE: FULL	REVISION: C/0	DWG NO. CNJST/GCCP-0362
C/0	2022.07.25	更新模板	王程伟	④	Cap	1	LCP (UL94V-0)	Nature	X.X ±0.30	CNJST 捷仕泰企业				Drawn: 王程伟 2022.07.25
B/1	2022.04.19	详见 ECR_JST2022003	黄炎程	③	Solder Tab	2	Brass	Tin-Plated	X.XX ±0.20					
B/0	2020.01.11	NEW RELEASE		②	Contacts	2~16	Brass	Tin-Plated	X.XXX ±0.10					
				①	Insulator	1	LCP (UL94V-0)	Nature	Angle ±3.0°	CNJST 捷仕泰企业				Approved: 林旭芝