RoHS Compliant

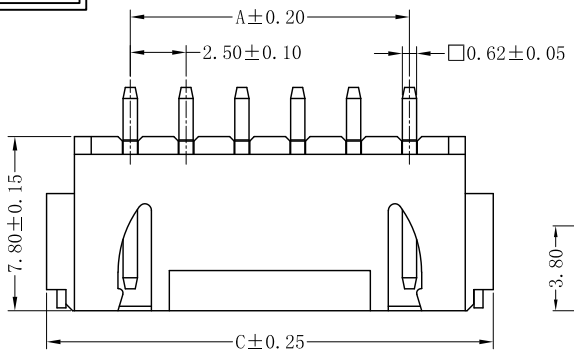

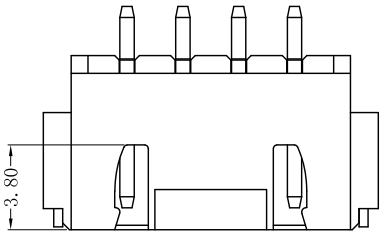

3P～5P



2P

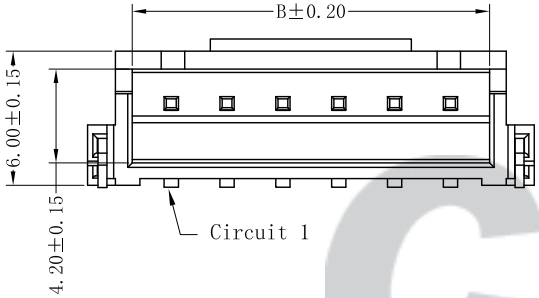





SPECIFICATION

1 Contact resistance: ≤20mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 250 V AC DC
4 Rated current: 3.0 A AC DC
5 Withstand Voltage: 1000V AC/minute
6 Temperature Range:-40℃～+125℃

ORDER INFORMATION:

A2502AWR-**-F2MA-R

- PART No.
- No. OF CIRCUITS: 02～15
- PLASTIC MATERIAL: F2M=LCP(Nature)
- PACKAGING: R=Reel
- PLATING: A=Tin-plated

Circuits	Dimensions		
	A	B	C
02	2.50	6.00	10.00
03	5.00	8.50	12.50
04	7.50	11.00	15.00
05	10.00	13.50	17.50
06	12.50	16.00	20.00
07	15.00	18.50	22.50
08	17.50	21.00	25.00
09	20.00	23.50	27.50
10	22.50	26.00	30.00
11	25.00	28.50	32.50
12	27.50	31.00	35.00
13	30.00	33.50	37.50
14	32.50	36.00	40.00
15	35.00	38.50	42.50

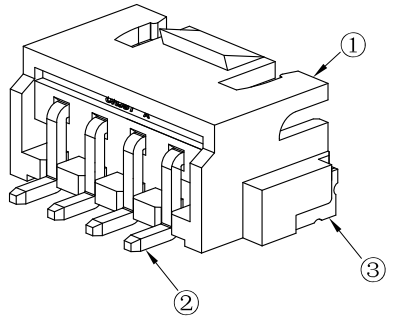

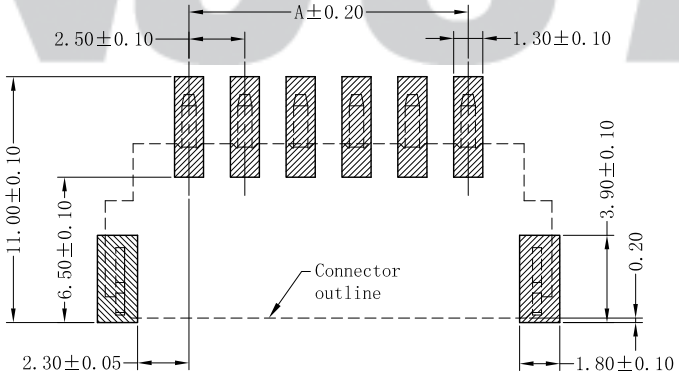

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套产品情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
				③	Solder Tab	2	Brass	Tin-Plated
C/0	2022.07.30	更新模板	王程伟	②	Contacts	2～15	Brass	Tin-Plated
B/0	2020.01.11	NEW RELEASE		①	Insulator	1	LCP(UL94V-0)	Nature

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

CNJST 捷仕泰企业

Model No.:A2502AWR-**-F2MA-R

Model Name:2.50mm pitch 90° WAFER-SMT TYPE

SCALE:FULL

REVISION:C/0

Drawn: 王程伟 2022.07.30

Checked: 吴丹平

Approved: 林旭芝

DWG NO.CNJST/GCCP-0361