
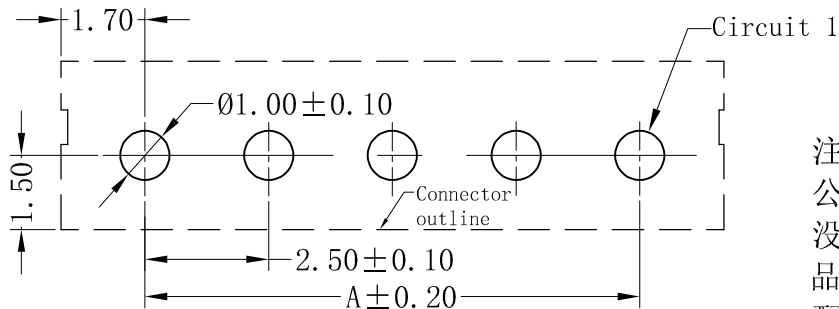

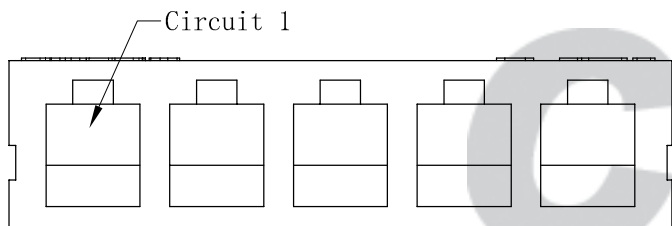
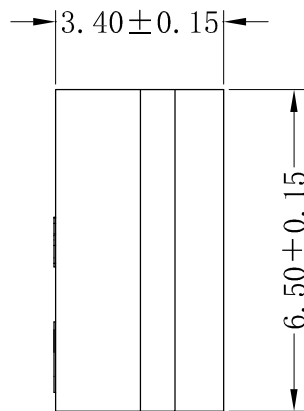


RoHS Compliant

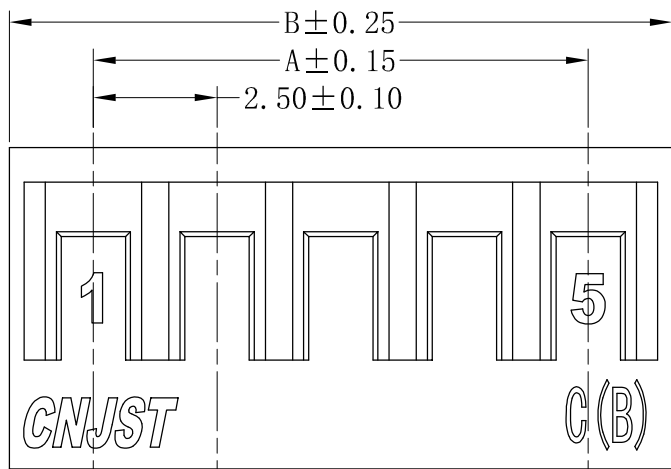

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套产品情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-40^{\circ}C \sim +125^{\circ}C$

ORDER INFORMATION:

B2501Y--A6M-P**

PART No. _____

No. OF CIRCUITS: _____

02~16

PACKAGING: P=PE

PLASTIC MATERIAL: A6M=PA66 (BEIGE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	2.50	5.90	10	22.50	25.90
03	5.00	8.40	11	25.00	28.40
04	7.50	10.90	12	27.50	30.90
05	10.00	13.40	13	30.00	33.40
06	12.50	15.90	14	32.50	35.90
07	15.00	18.40	15	35.00	38.40
08	17.50	20.90	16	37.50	40.90
09	20.00	23.40			

专利产品

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	CNJST 捷仕泰企业	Drawn: 黄美程 2023.01.05
UNIT: mm	Model No.: B2501Y-**-A6M-P	Checked: 吴丹平
	Model Name: 2.50mm PITCH 180° HOUSING	Approved: 林旭芝
	SCALE: FULL	REVISION: C/0
		DWG NO.: CNJST/GCCP-0130

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2023.01.05	更新模板	黄美程					
B/0	2020.07.15	NEW RELEASE	徐广	①	Insulator	1	PA66 (UL94V-0)	Beige