
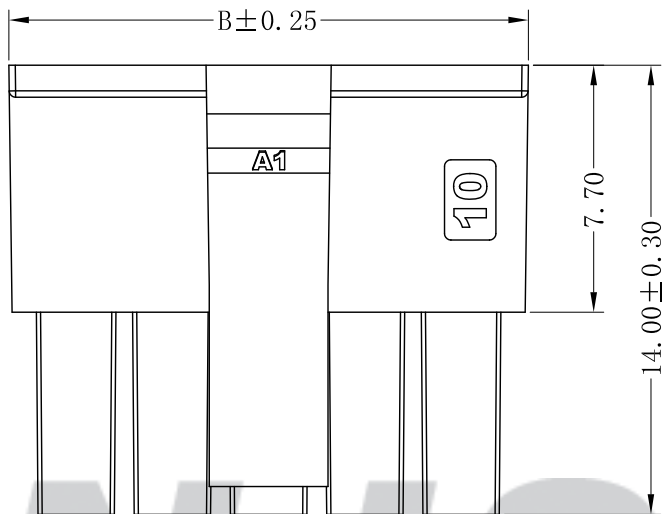



RoHS Compliant

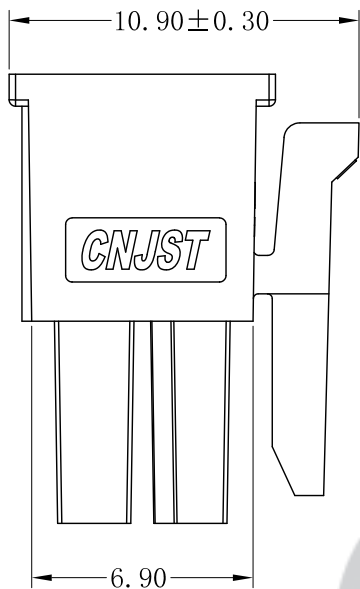



**SPECIFICATION**

- 1 Contact resistance:  $\leq 10\text{m}\Omega$
- 2 Insulation resistance:  $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 5.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

**ORDER INFORMATION:**

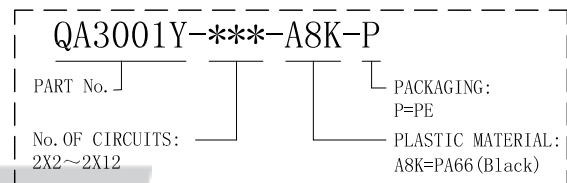

Circuits	Dimensions (mm)	
	A	B
202 (2X2)	3.00	7.20
203 (2X3)	6.00	10.20
204 (2X4)	9.00	13.20
205 (2X5)	12.00	16.20
206 (2X6)	15.00	19.20
207 (2X7)	18.00	22.20
208 (2X8)	21.00	25.20
209 (2X9)	24.00	28.20
210 (2X10)	27.00	31.20
211 (2X11)	30.00	34.20
212 (2X12)	33.00	37.20

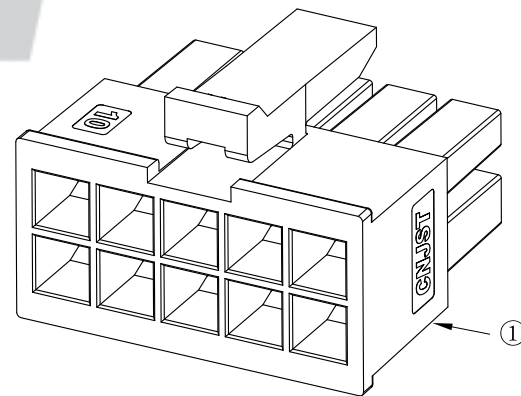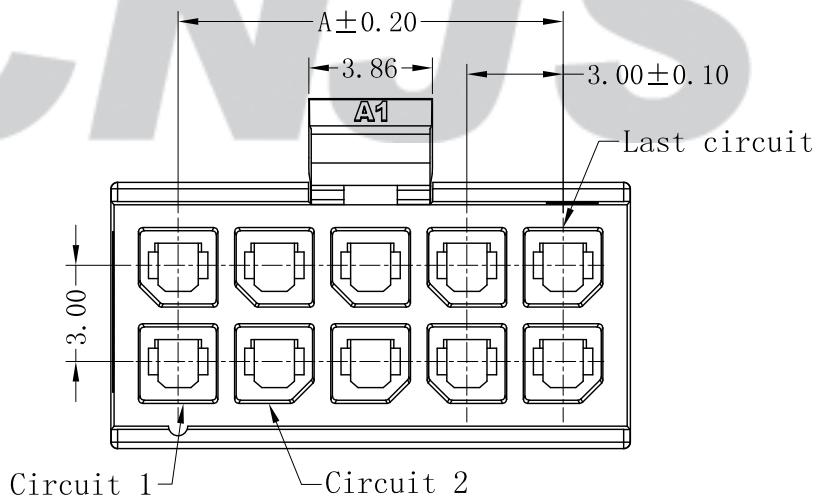


注: 建议客户优先选择我司公母端产品配套使用, 若在没有使用我司公母端配套产品情况下, 出现因产品不匹配的质量问题, 我司将不承担任何风险及责任。

专利产品


REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022.12.14	更新模板	王程伟					
B/0	2021.08.21	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	<b>CNJST</b> 捷仕泰企业	Drawn: 王程伟 2022.12.14
UNIT: mm	Model No.: QA3001Y-***-A8K-P	Checked: 吴丹平
	Model Name: 3.00mm PITCH HOUSING	Approved: 林旭芝
	SCALE: FULL REVISION: C/0	DWG NO. CNJST/GCCP-0638


RoHS Compliant




201




202




203




204




205

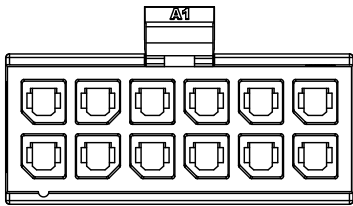


206

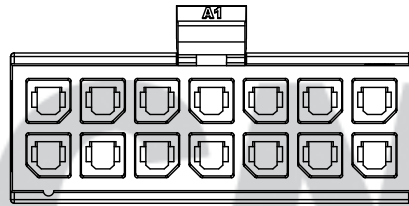


207

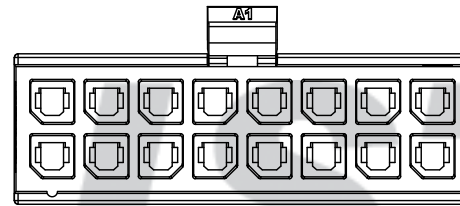


208

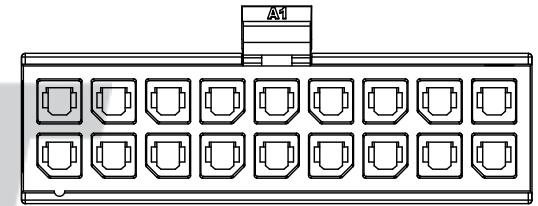


209

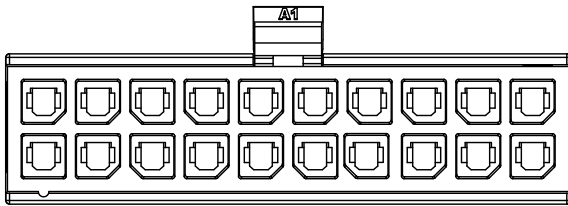

210

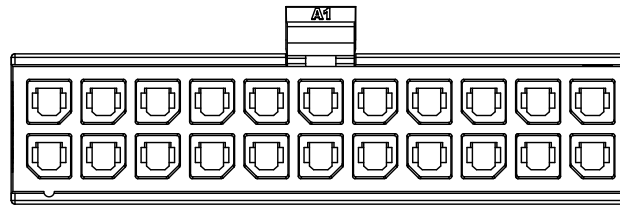

211

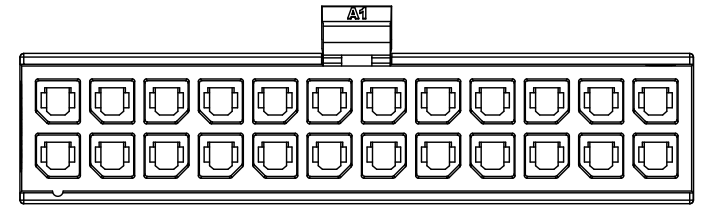

212

专利产品

C/0	2022. 12. 14	更新模板	王程伟
B/0	2021. 08. 21	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套产品情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	<b>CNJST</b> 捷仕泰企业		Drawn: 王程伟 2022. 12. 14
	Model No. :QA3001Y-***-A8K-P		Checked: 吴丹平
UNIT: mm	Model Name: 3.00mm PITCH HOUSING		Approved: 林旭芝
		SCALE: FULL	REVISION: C/0
			DWG NO. CNJST/GCCP-0638