
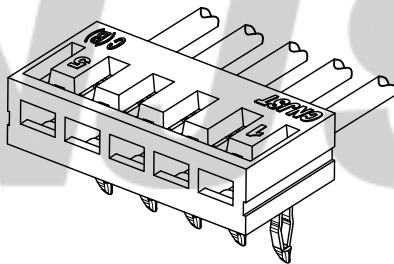
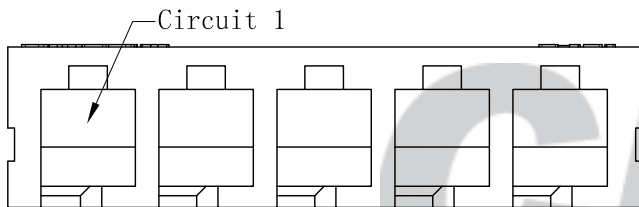
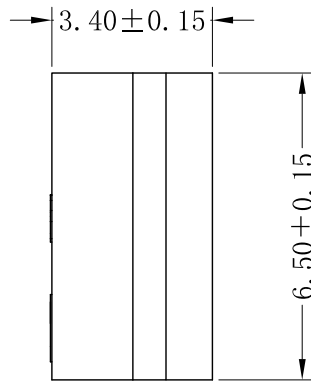



RoHS Compliant

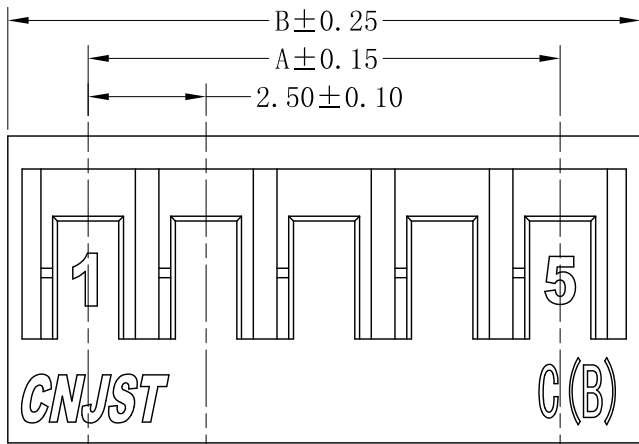


SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range:  $-40^{\circ}C \sim +125^{\circ}C$

ORDER INFORMATION:

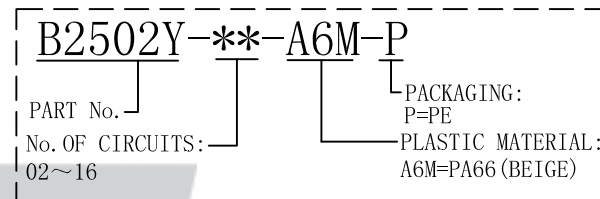

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	2.50	5.90	10	22.50	25.90
03	5.00	8.40	11	25.00	28.40
04	7.50	10.90	12	27.50	30.90
05	10.00	13.40	13	30.00	33.40
06	12.50	15.90	14	32.50	35.90
07	15.00	18.40	15	35.00	38.40
08	17.50	20.90	16	37.50	40.90
09	20.00	23.40			

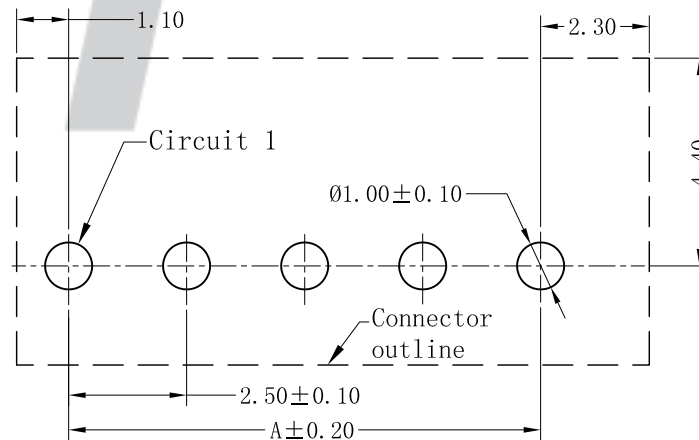

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

专利产品

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套产品情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	<b>CNJST 捷仕泰企业</b>		Drawn: 李浩然 2022.12.29
	Model No.: B2502Y-**-A6M-P		Checked: 吴丹平
	Model Name: 2.50mm PITCH 90° HOUSING		Approved: 林旭芝
	UNIT: mm		DWG NO.: CNJST/GCCP-0131

C/O	2022.12.29	更新模板	李浩然					
B/O	2020.07.15	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Beige
REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR