RoHS Compliant

成品图

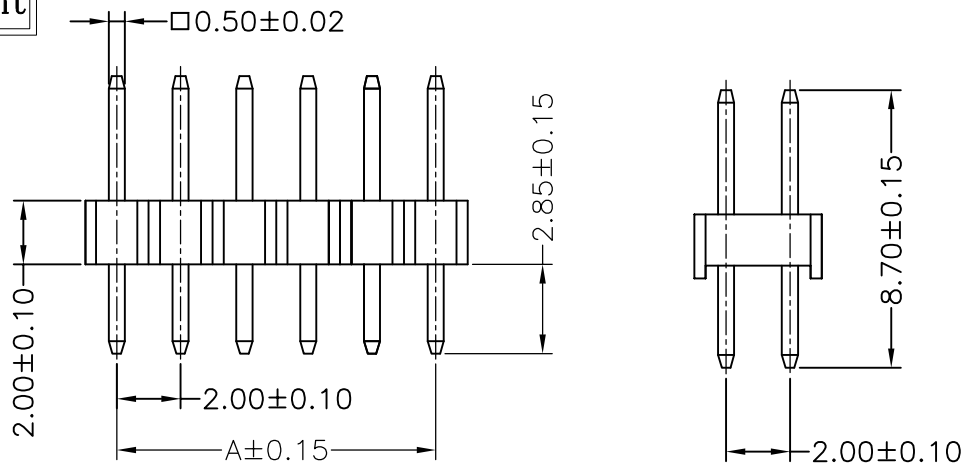

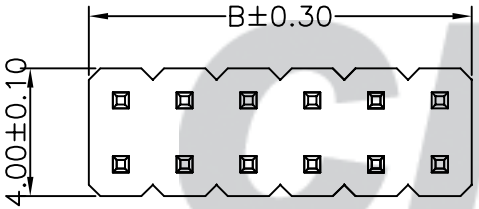

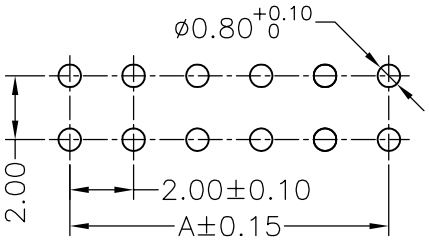

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

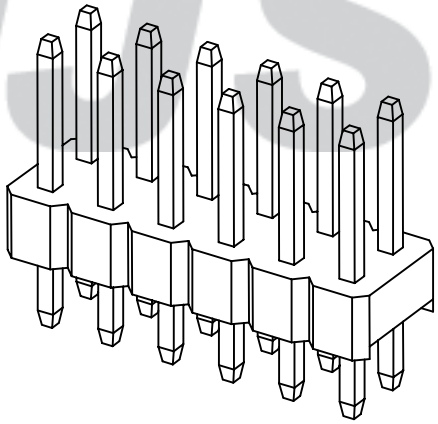

SPECIFICATION

1 Contact resistance: ≤20mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 250 V AC DC
4 Rated current: 1.0 A AC DC
5 Withstand Voltage: 800V AC/minute
6 Temperature Range:-25℃～ +85℃

ORDER INFORMATION:

A2005A-***-C3KC-*

- PART No.
- No. OF CIRCUITS: 2X2～2X40
- PLASTIC MATERIAL: C3K=PA6T(BLACK) E2K=PBT(BLACK)
- PLATING: C=Gold-plated
- PACKAGING: P=PE B=Tray

Circuits	Dimensions(mm) A	B	Circuits	Dimensions(mm) A	B
201	0	2.00	221	40.00	42.00
202	2.00	4.00	222	42.00	44.00
203	4.00	6.00	223	44.00	46.00
204	6.00	8.00	224	46.00	48.00
205	8.00	10.00	225	48.00	50.00
206	10.00	12.00	226	50.00	52.00
207	12.00	14.00	227	52.00	54.00
208	14.00	16.00	228	54.00	56.00
209	16.00	18.00	229	56.00	58.00
210	18.00	20.00	230	58.00	60.00
211	20.00	22.00	231	60.00	62.00
212	22.00	24.00	232	62.00	64.00
213	24.00	26.00	233	64.00	66.00
214	26.00	28.00	234	66.00	68.00
215	28.00	30.00	235	68.00	70.00
216	30.00	32.00	236	70.00	72.00
217	32.00	34.00	237	72.00	74.00
218	34.00	36.00	238	74.00	76.00
219	36.00	38.00	239	76.00	78.00
220	38.00	40.00	240	78.00	80.00

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.05.18	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
②	Contacts	2～80	Brass	Gold Flash(G/F 0.8U")
①	Insulator	1	PA6T(UL94V-0)	Black

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

Model Name: 2.00mm Pitch 180° Dual row Pin Header-DIP TYPE
Model No: A2005A-***-C3KC-*

SCALE:FULL REVISION:B/0

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.18
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0153