
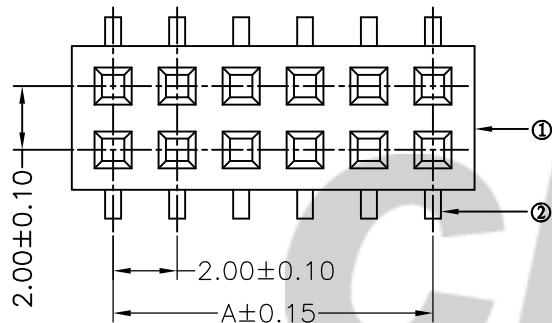




RoHS Compliant

成品图

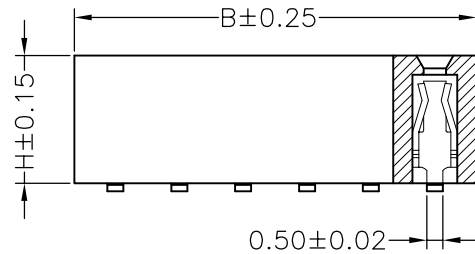


Ordering Information & Specifications

H:High Option	W:Width Option
4.00	4.00
4.30	4.50
4.60	

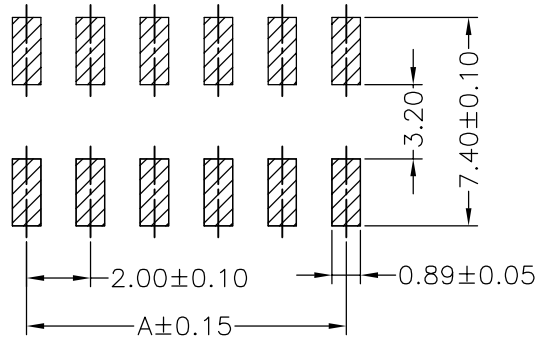

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

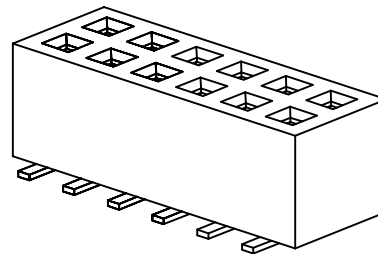

SPECIFICATION

- Contact resistance:  $\leq 20m\Omega$
- Insulation resistance:  $\geq 1000M\Omega$
- Rated voltage: 250 V AC DC
- Rated current: 1.5 A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

P2001AWV-\*\*\*-C3KC-G

PART No.		PACKAGING:
No. OF CIRCUITS:		G-TUBE
2X3~2X40		PLATING:
PLASTIC MATERIAL:		C-Gold-plated
E2K=PBT (BLACK)		
C3K=PA6T (BLACK)		

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
203 (2X3)	4.00	6.50	222 (2X22)	42.00	44.50
204 (2X4)	6.00	8.50	223 (2X23)	44.00	46.50
205 (2X5)	8.00	10.50	224 (2X24)	46.00	48.50
206 (2X6)	10.00	12.50	225 (2X25)	48.00	50.50
207 (2X7)	12.00	14.50	226 (2X26)	50.00	52.50
208 (2X8)	14.00	16.50	227 (2X27)	52.00	54.50
209 (2X9)	16.00	18.50	228 (2X28)	54.00	56.50
210 (2X10)	18.00	20.50	229 (2X29)	56.00	58.50
211 (2X11)	20.00	22.50	230 (2X30)	58.00	60.50
212 (2X12)	22.00	24.50	231 (2X31)	60.00	62.50
213 (2X13)	24.00	26.50	232 (2X32)	62.00	64.50
214 (2X14)	26.00	28.50	233 (2X33)	64.00	66.50
215 (2X15)	28.00	30.50	234 (2X34)	66.00	68.50
216 (2X16)	30.00	32.50	235 (2X35)	68.00	70.50
217 (2X17)	32.00	34.50	236 (2X36)	70.00	72.50
218 (2X18)	34.00	36.50	237 (2X37)	72.00	74.50
219 (2X19)	36.00	38.50	238 (2X38)	74.00	76.50
220 (2X20)	38.00	40.50	239 (2X39)	76.00	78.50
221 (2X21)	40.00	42.50	240 (2X40)	78.00	80.50

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.00mm PITCH Female Header Straight 180° Wafer-SMT TYPE Model No: P2001AWV-***-C3KC-G	Drawn: 蔡忠忠 2016.05.24
	SCALE: FULL REVISION: B/0	Checked: 林旭芝
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0184

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/O	2016.05.24	NEW RELEASE		②	Contacts	6~80	Phosphor Bronze	Gold-plated
				①	Insulator	1	PA6T (UL94V-0)	Black