

RoHS Compliant

成品图

SPECIFICATION





- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A2005Y-\*\*-A8K-P**

PART No. \_\_\_\_\_  
 No. OF CIRCUITS: 2~20

PACKAGING: P=PE  
 PLASTIC MATERIAL: A8K=PA66 (BLACK)

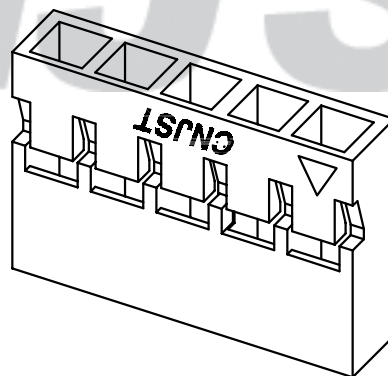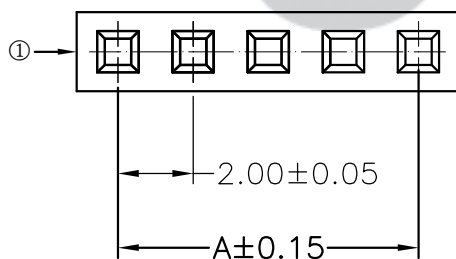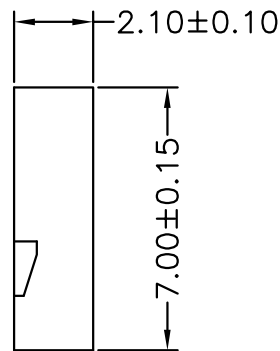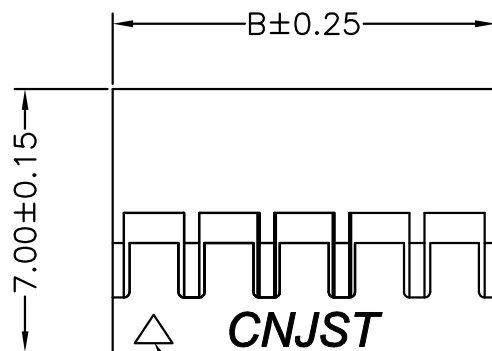

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02	2.00	4.20	12	22.00	24.20
03	4.00	6.20	13	24.00	26.20
04	6.00	8.20	14	26.00	28.20
05	8.00	10.20	15	28.00	30.20
06	10.00	12.20	16	30.00	32.20
07	12.00	14.20	17	32.00	34.20
08	14.00	16.20	18	34.00	36.20
09	16.00	18.20	19	36.00	38.20
10	18.00	20.20	20	38.00	40.20
11	20.00	22.20			

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.18	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.00mm PITCH HOUSING		SCALE: FULL	REVISION: B/0	Drawn: 蔡忠忠 2016.05.18
	Model No: A2005Y-**-A8K-P				Checked: 林旭芝
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD			Approved: 刘祚杰	
					DWG NO. CNJST/GCCP-0152