

RoHS Compliant

成品图


SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 800M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 1.0A AC DC
- 5 Withstand Voltage: 1500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:


TD252001MB-02-F2MB-R

PART No.:	PACKAGING:
No. OF CIRCUITS:	R=REEL
02	PLATING:
PLASTIC MATERIAL:	B=Mattn Sn
F2M=LCP	

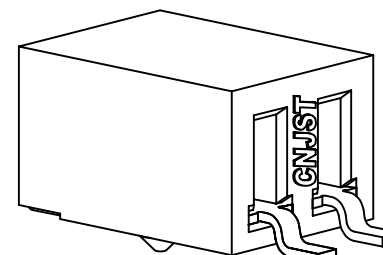

Mating Aluminum plate detail

SUGGESTED PCB LAYOUT (TOP VIEW)

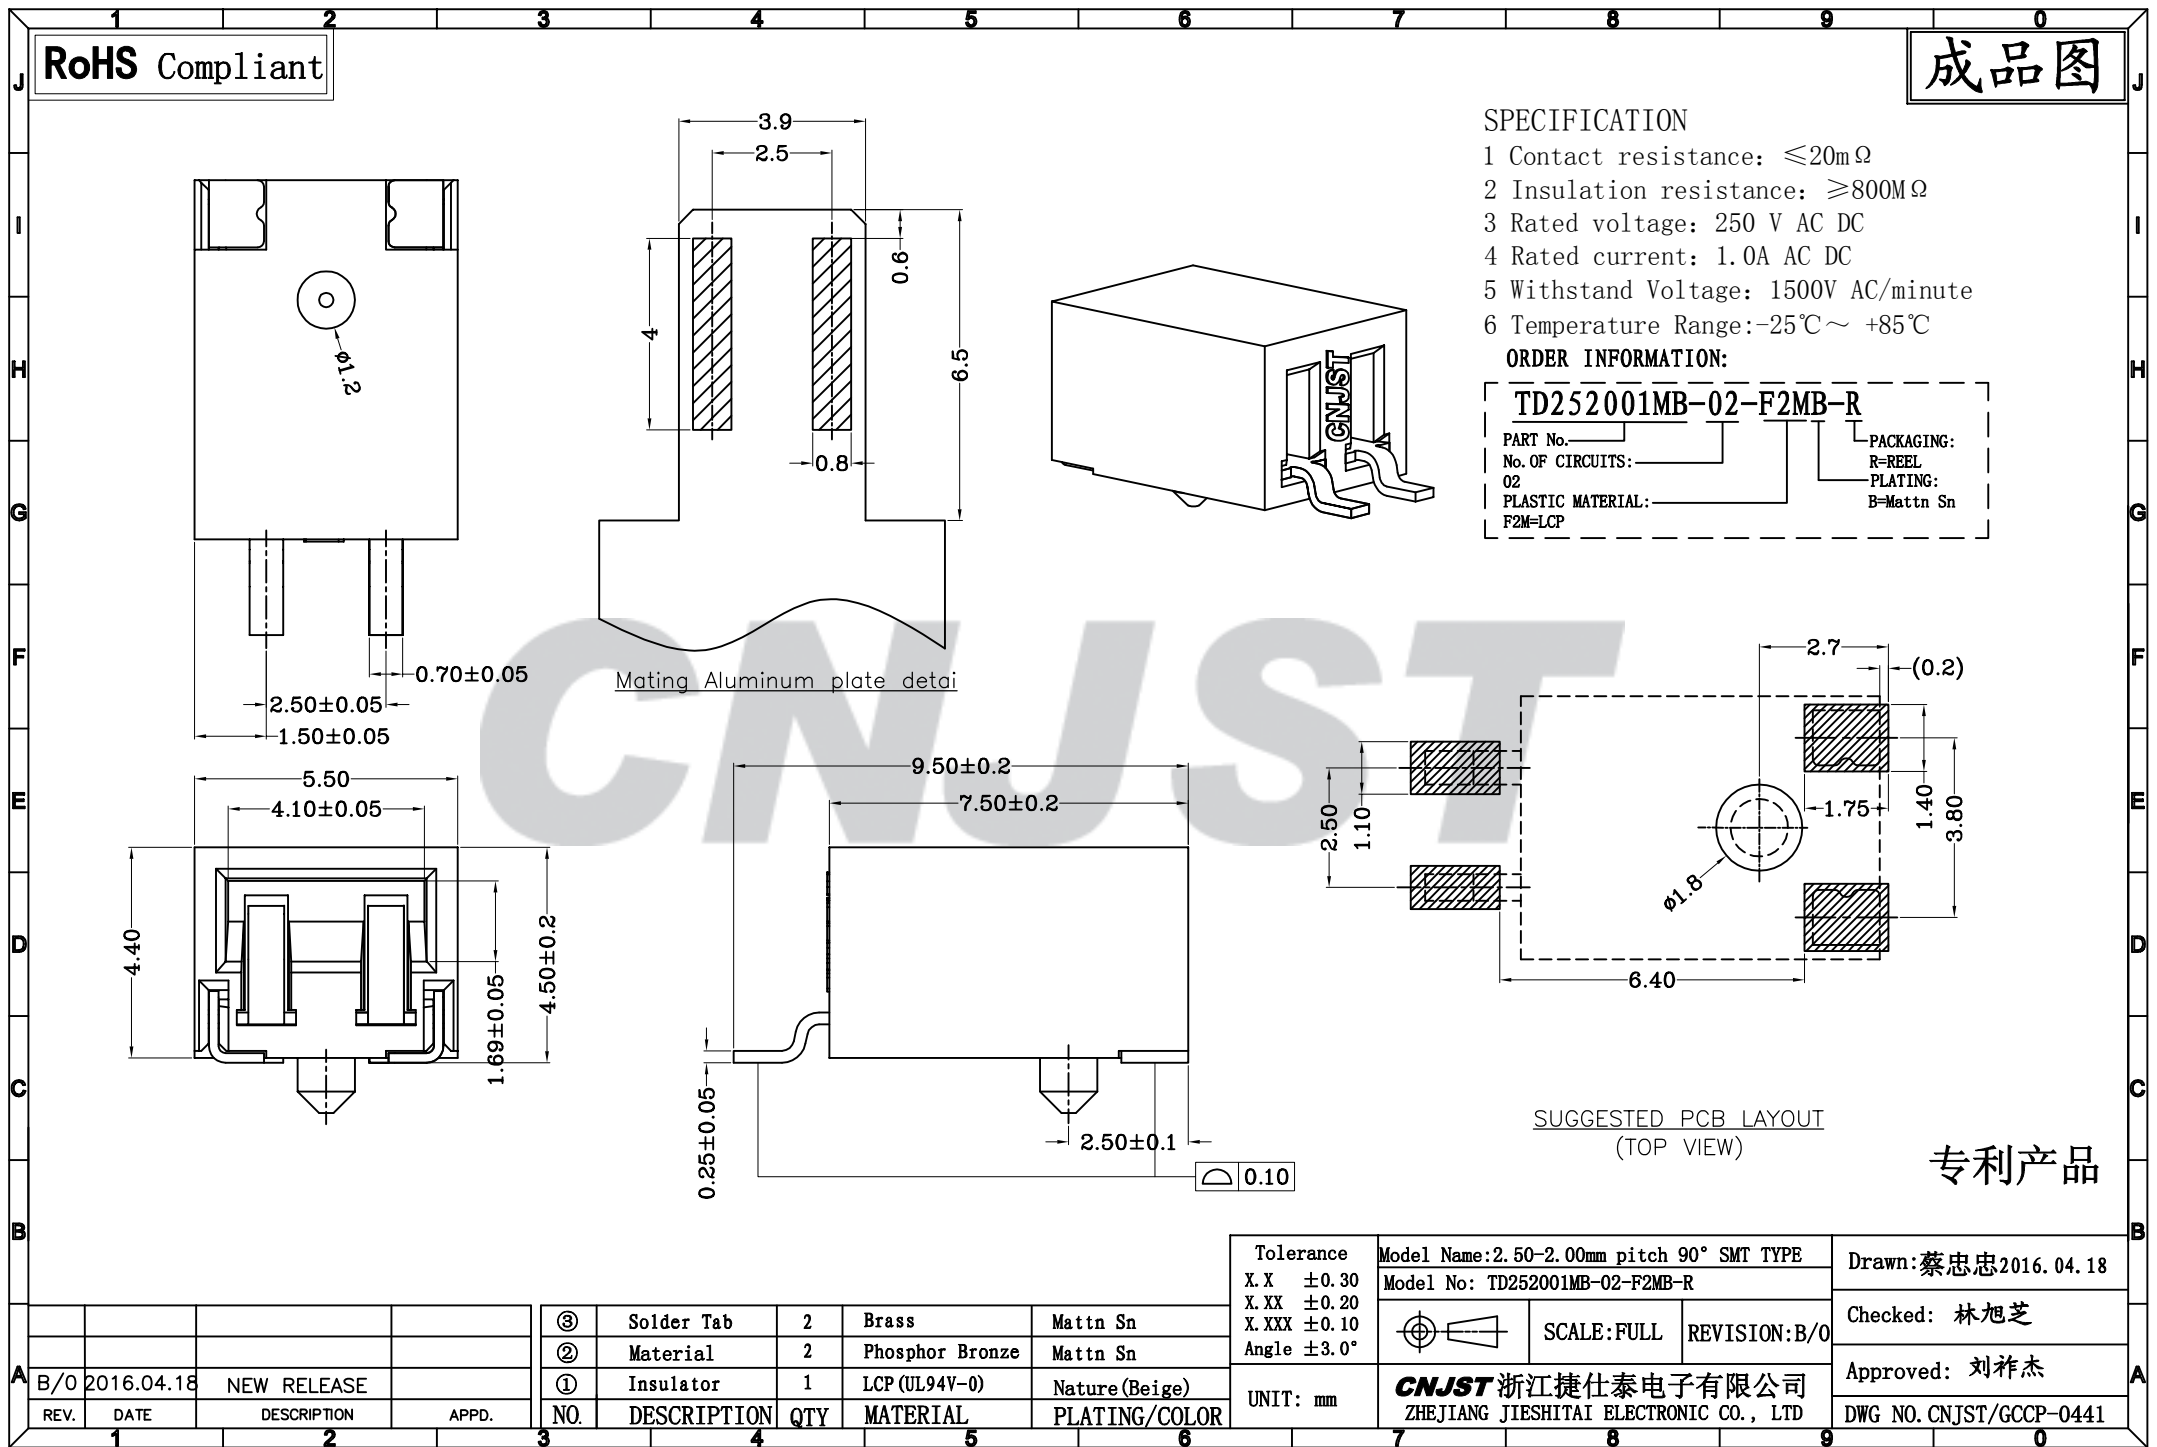

专利产品

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.18	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tab	2	Brass	Mattn Sn
②	Material	2	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP (UL94V-0)	Nature (Beige)

Tolerance	Model Name: 2.50-2.00mm pitch 90° SMT TYPE
X.X ±0.30	Model No: TD252001MB-02-F2MB-R
X.XX ±0.20	
X.XXX ±0.10	
Angle ±3.0°	

UNIT: mm	SCALE: FULL	REVISION: B/0
----------	-------------	---------------

Drawn: 蔡忠忠 2016.04.18
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0441

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD