

RoHS Compliant

成品图





SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +110^{\circ}C$

ORDER INFORMATION:

T1501M-04-C1MB-R

PART No.		PACKAGING:
No. OF CIRCUITS:	04	R=Reel
PLASTIC MATERIAL:	C1M=FR52 (Nature)	PLATING:
		B=Mattn Sn

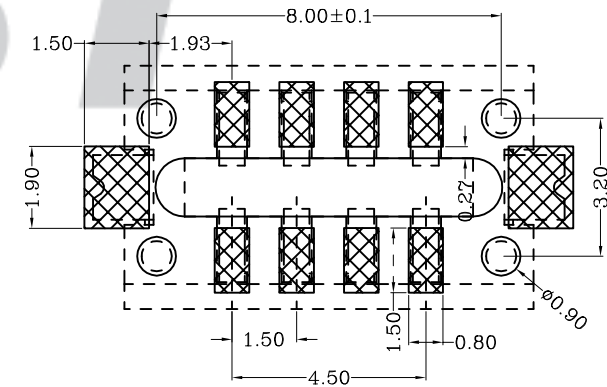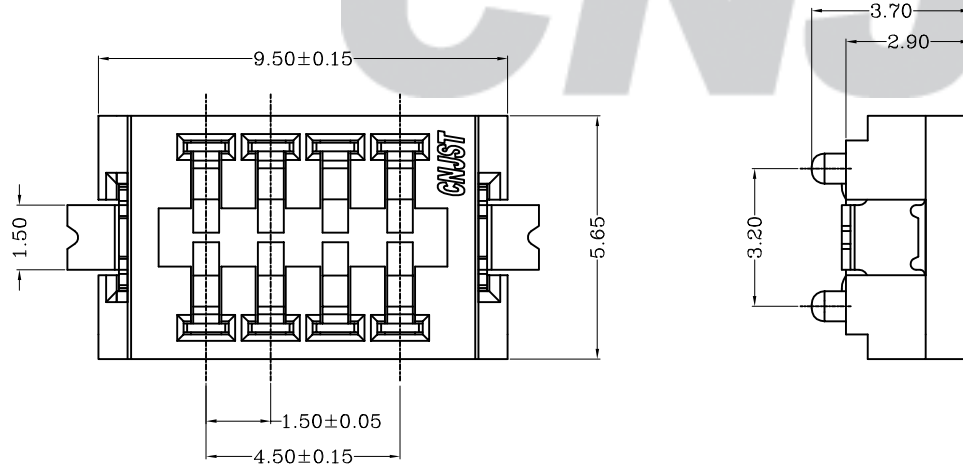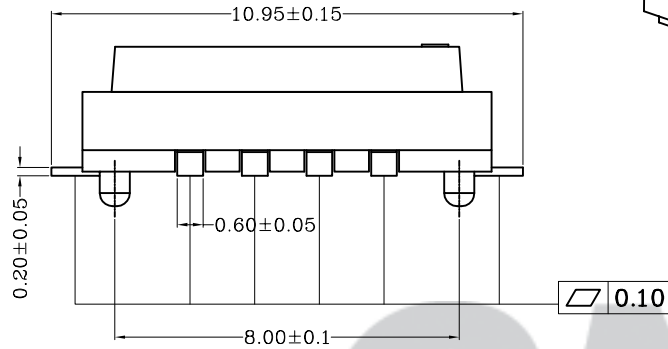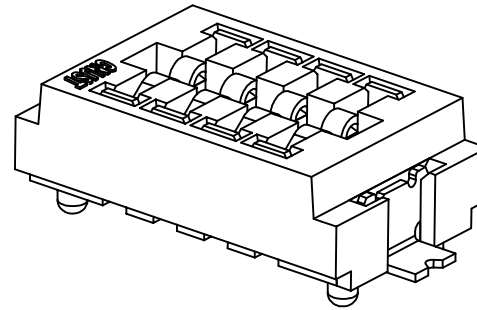

PCB LAYOUT

B/0	2016.04.18	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.

③	Solder Tabs	2	Brass	Mattn Sn
②	Material	8	Phosphor Bronze	Mattn Sn
①	Insulator	1	FR52 (UL94V-0)	Nature (Beige)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	Model Name: 1.50mm Pitch 180° Wafer-SMT TYPE
X.X ±0.30	Model No: T1501M-04-C1MB-R
X.XX ±0.20	
X.XXX ±0.10	
Angle ±3.0°	
UNIT: mm	SCALE: FULL REVISION: B/0
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.04.18
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0462