

RoHS Compliant

成品图




SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 800M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

**T003-P0-P**

PART No.	PACKAGING: P=PE PLATING: 0=NO-Plated
PLASTIC MATERIAL: P=Phosphor Bronze B=Brass	

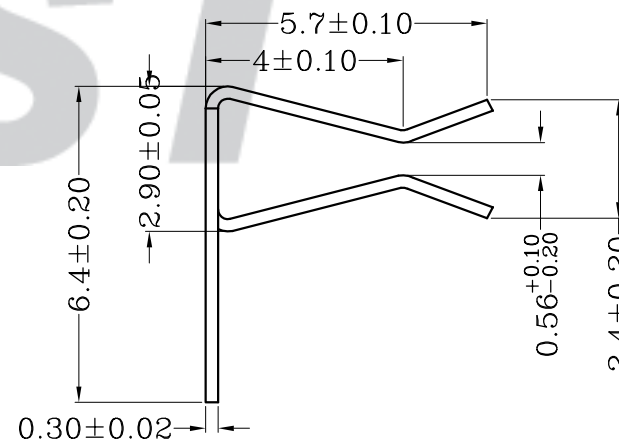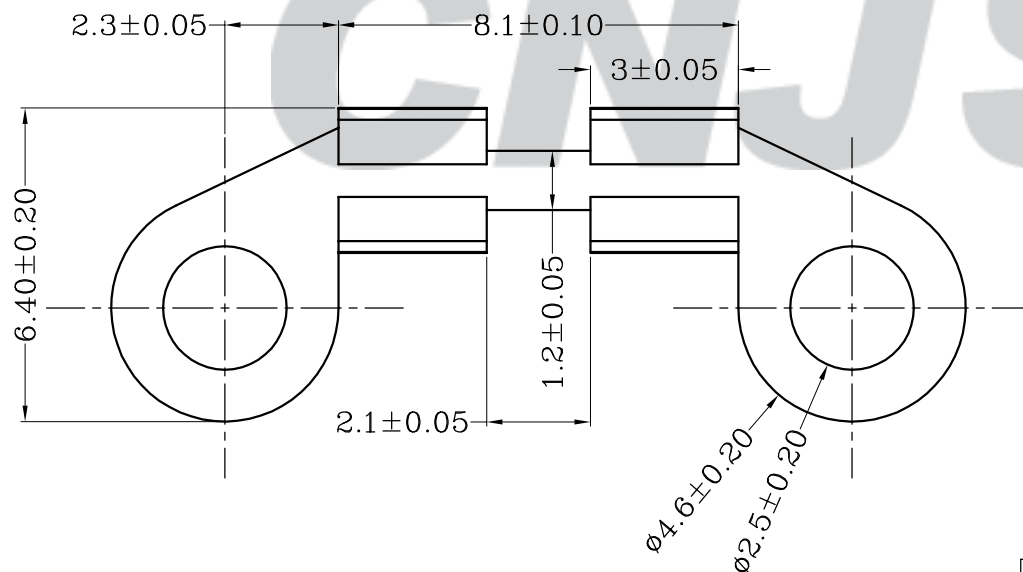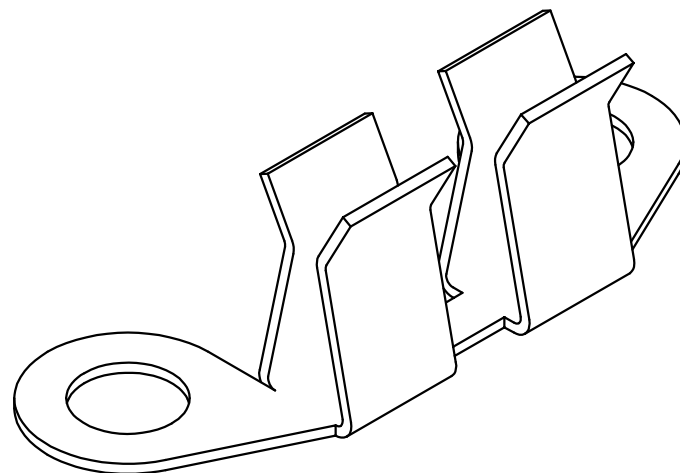

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: TERMINAL Model No: T003-P0-P	Drawn: 蔡忠忠 2016.04.18
	SCALE: FULL REVISION: B/0	Checked: 林旭芝
UNIT: mm	<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0081

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.18	NEW RELEASE		①	Contacts	1	Phosphor Bronze	NO-Plated