

RoHS Compliant

成品图





SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-20^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

T004G-01-PB-R

PART No.:		PACKAGING:	
No. OF CIRCUITS:	01	R=Reel	
PLASTIC MATERIAL:	P=Phosphor bronze	PLATING:	B=Mattn Sn-plated

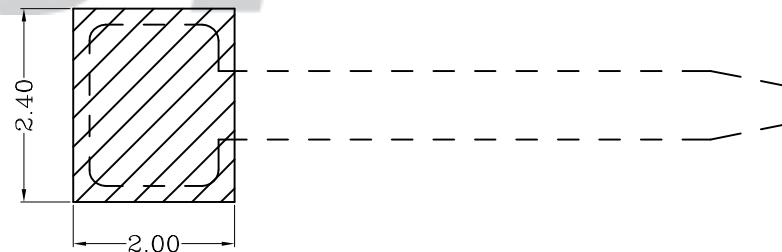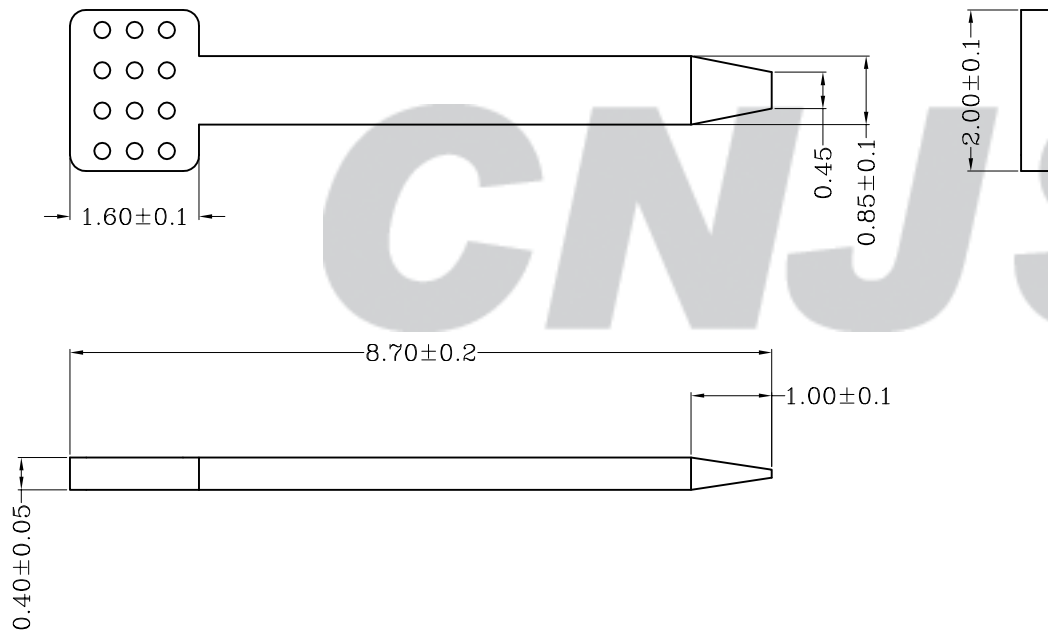

PCB LAYOUT

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.18	NEW RELEASE		①	Contacts	1	Phosphor Bronze	Mattn Sn-plated

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: Hardware Lihgting		Drawn: 蔡忠忠 2016.04.18 Checked: 林旭芝 Approved: 刘祚杰
	Model No: T004G-01-PB-R		
UNIT: mm	SCALE: FULL	REVISION: B/0	DWG NO. CNJST/GCCP-0460

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD