

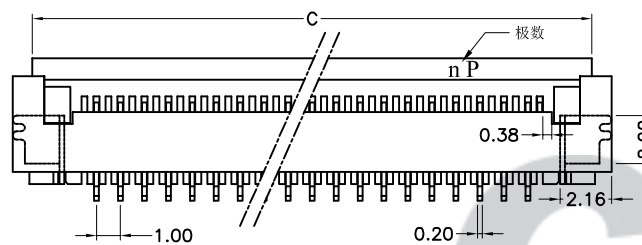



RoHS Compliant

成品图

SPECIFICATION


- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 0.3 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

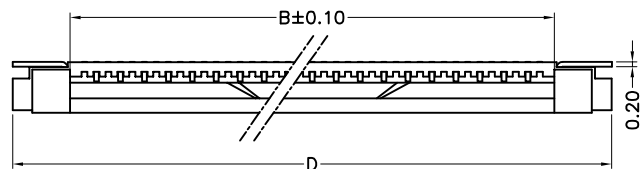


ORDER INFORMATION:

F1010AWR-**-F2MB-R

Part No. _____
 No. of Circuits: _____
 2~30
 PLASTIC MATERIAL: _____
 F2=LCP (Locker:LCP)
 PACKAGING: _____
 R=Reel
 PLATING: _____
 B=Matte Sn

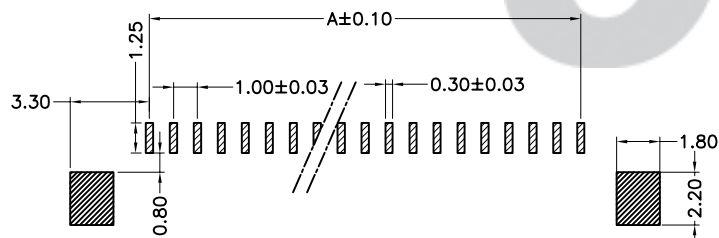

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

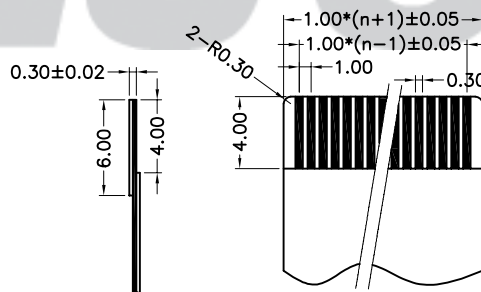

Accommodated FFC/FPC

孔位	A	B	C	D
4	3.00	5.10	8.50	9.90
5	4.00	6.10	9.50	10.90
6	5.00	7.10	10.50	11.90
7	6.00	8.10	11.50	12.90
8	7.00	9.10	12.50	13.90
9	8.00	10.10	13.50	14.90
10	9.00	11.10	14.50	15.90
11	10.00	12.10	15.50	16.90
12	11.00	13.10	16.50	17.90
13	12.00	14.10	17.50	18.90
14	13.00	15.10	18.50	19.90
15	14.00	16.10	19.50	20.90
16	15.00	17.10	20.50	21.90
17	16.00	18.10	21.50	22.90
18	17.00	19.10	22.50	23.90
19	18.00	20.10	23.50	24.90
20	19.00	21.10	24.50	25.90
21	20.00	22.10	25.50	26.90
22	21.00	23.10	26.50	27.90
23	22.00	24.10	27.50	28.90
24	23.00	25.10	28.50	29.90
25	24.00	26.10	29.50	30.90
26	25.00	27.10	30.50	31.90
27	26.00	28.10	31.50	32.90
28	27.00	29.10	32.50	33.90
29	28.00	30.10	33.50	34.90
30	29.00	31.10	34.50	35.90
31	30.00	32.10	35.50	36.90
32	31.00	33.10	36.50	37.90
33	32.00	34.10	37.50	38.90
34	33.00	35.10	38.50	39.90
35	34.00	36.10	39.50	40.90

B/0	2016.04.12	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.
1			

④	Locker	1	LCP (UL94V-0)	Nature (Black)
③	Solder Tab	2	Phosphor Bronze	Mattn Sn
②	Contacts	02~30	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP (UL94V-0)	Nature
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm SMT ZIF Upside FFC/FPC Connectors Model No: F1010AWR-**-F2MB-R	Drawn: 张育斌 2016.05.13
UNIT: mm	SCALE: FULL REVISION: B/0	Checked: 林旭芝
CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD		Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0404