


RoHS Compliant

成品图

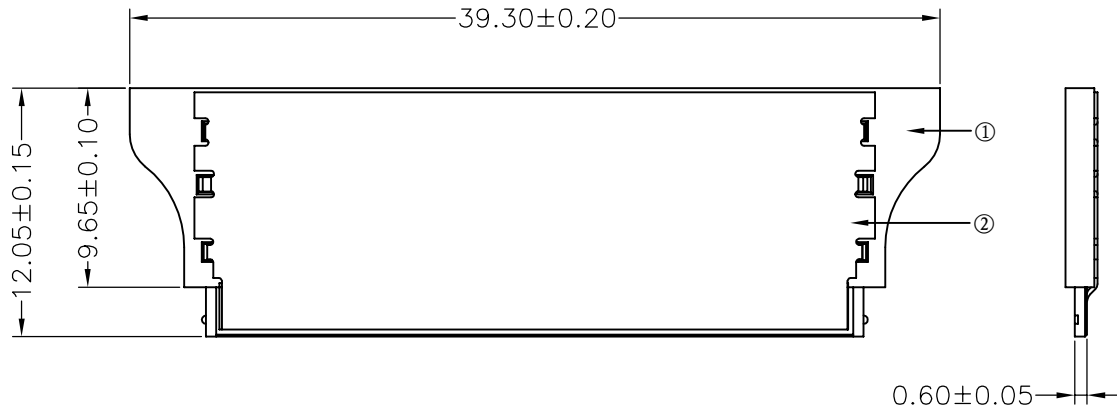

SPECIFICATION


- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 200 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$




ORDER INFORMATION:

**F1007Y-30-B1MA-P**

PART No.		PACKAGING:
No. OF CIRCUITS:		P=PE
30		PLATING:
PLASTIC MATERIAL:		A=Tin-plated
B1M=PA46		

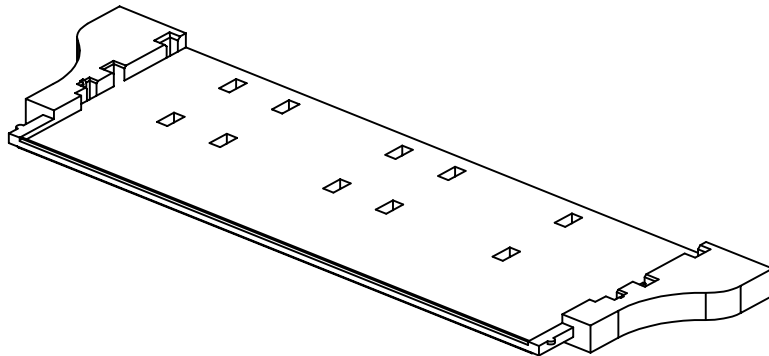

Tolerance	Model Name: 1.00mm PITCH FPC/FFC Connector	Drawn: 蔡忠忠 2016.05.03
X.X ±0.30	Model No: F1007Y-30-B1MA-P	
X.XX ±0.20	 SCALE: FULL <span style="margin-left: 20px;">REVISION: B/0</span>	Checked: 林旭芝
X.XXX ±0.10		
Angle ±3.0°	UNIT: mm	DWG NO. CNJST/GCCP-0019

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.03	NEW RELEASE		②	Shell	1	Copp Alloy	Tin-plated
				①	Insulator	1	PA46 (UL94V-0)	Nature