


RoHS Compliant


成品图

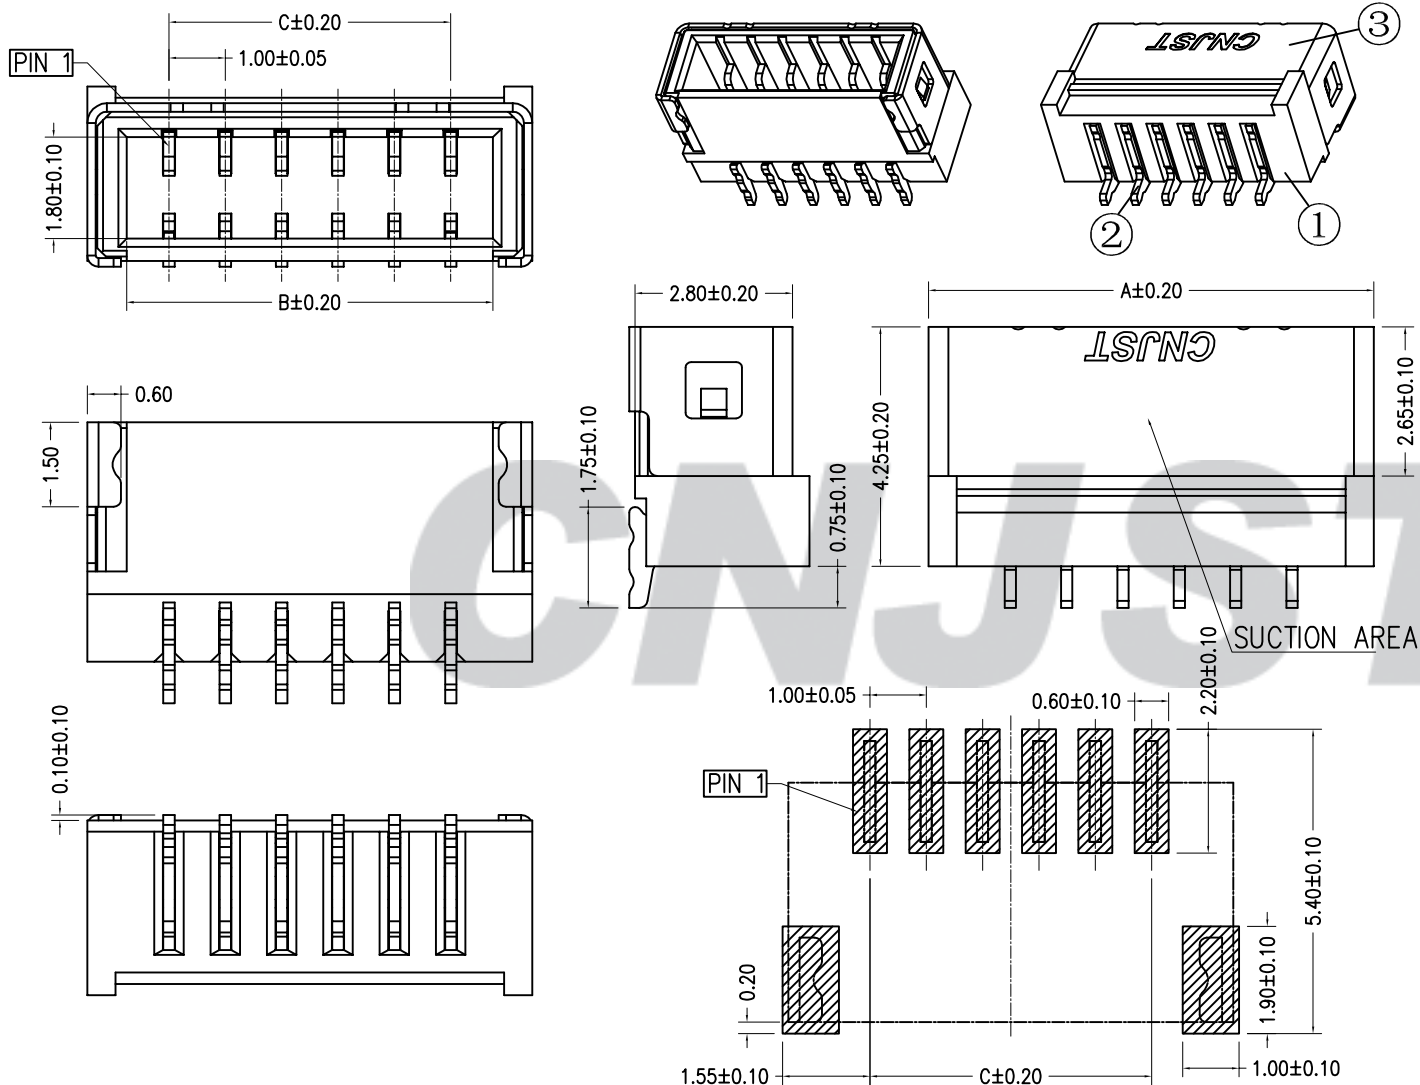

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

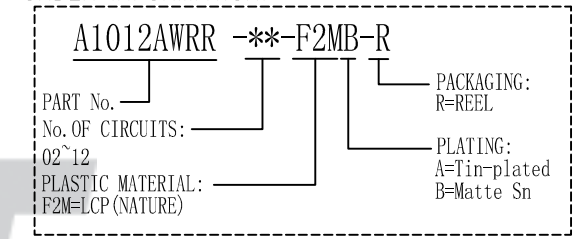

Circuits	Dimensions (mm)		
	A	B	C
02	3.90	2.50	1.00
03	4.90	3.50	2.00
04	5.90	4.50	3.00
05	6.90	5.50	4.00
06	7.90	6.50	5.00
07	8.90	7.50	6.00
08	9.90	8.50	7.00
09	10.90	9.50	8.00
10	11.90	10.50	9.00
11	12.90	11.50	10.00
12	13.90	12.50	11.00

SUGGESTED PCB LAYOUT (COMPONENT SIDE)

Tolerance
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±3.0°
 UNIT: mm

Model Name: 1.00mm pitch 90° WAFER-SMT TYPE
 Model No: A1012AWRR-**-F2MB-R
 SCALE: FULL REVISION: B/0
CNJST 浙江捷仕泰电子有限公司
 ZHEJIANG JIESHITAI ELECTRONICS CO., LTD.

Drawn: 张育斌 2016.04.13
 Checked: 林旭芝
 Approved: 刘祚杰
 DWG NO. CNJST/GCCP-0393

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tab	1	Phosphor Bronze	Mattn Sn
②	Contacts	02~12	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP	Nature

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	

专利产品