
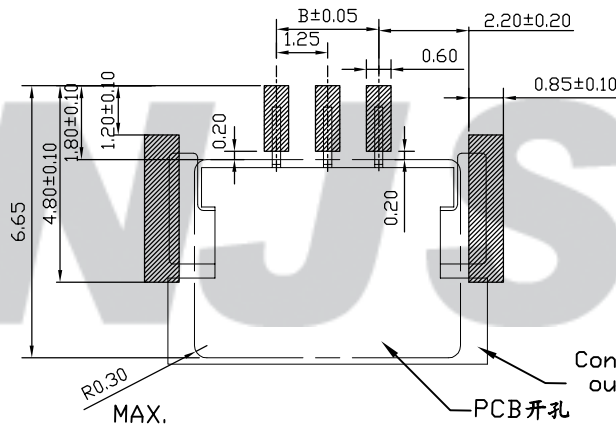
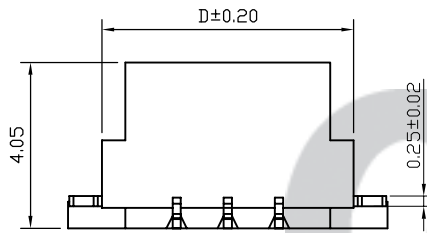
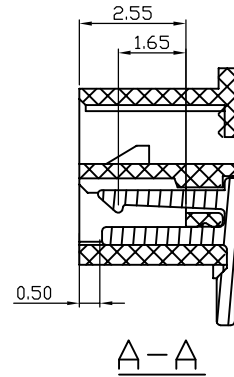
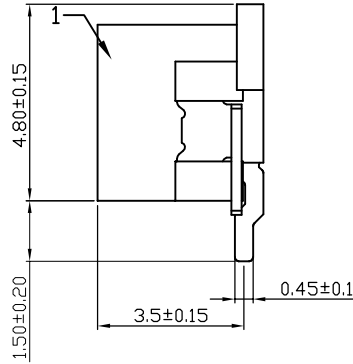


RoHS Compliant

成品图

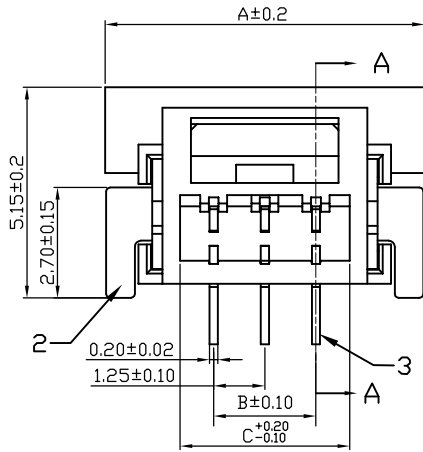

SPECIFICATION


- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A12510AWV-\*\*-F2MA-R**

PART No. \_\_\_\_\_  
 No. OF CIRCUITS: \_\_\_\_\_  
 02~03 \_\_\_\_\_  
 PLASTIC MATERIAL: \_\_\_\_\_  
 F2M=LCP (Nature) \_\_\_\_\_  
 PACKAGING: R=REEL  
 PLATING: A=Sn


Circuits	Dimensions (mm)			
	A	B	C	D
12510(2P)	6.55	1.25	2.90	4.90
12510(3P)	7.80	5.00	4.15	6.15

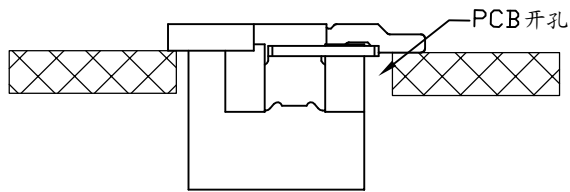

INSTALLATION DIAGRAM

安装示意图

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

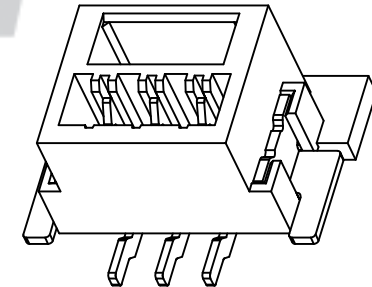

Tolerance X.X $\pm 0.30$ X.XX $\pm 0.20$ X.XXX $\pm 0.10$ Angle $\pm 3.0^{\circ}$	Model Name: 1.25mm pitch 180° WAFER-SMT TYPE		Drawn: 张育斌 2016. 04. 13 Checked: 林旭芝 Approved: 刘祚杰
	Model No: A12510AWV-**-F2MA-R		
	SCALE: FULL REVISION: B/0	UNIT: mm <b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tab	2	Phosphor Bronze	Tin-plated
②	Contacts	2~3	Phosphor Bronze	Tin-plated
①	Insulator	1	LCP(UL94V-0)	Beige

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	