
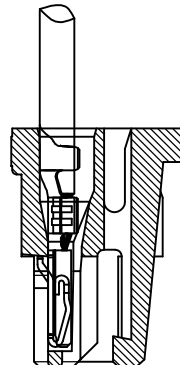



RoHS Compliant

成品图

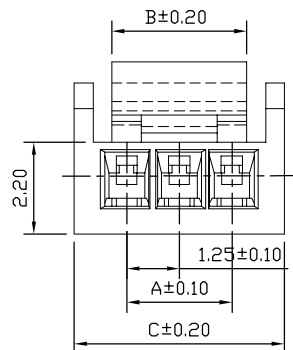

插线状态




SPECIFICATION

- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:



**A12510Y-\*\*-E1M-P**

PART No.		
No. OF CIRCUITS:	02~03	PACKAGING:
PLASTIC MATERIAL:	E1M=PBT (Nature)	R=REEL G=TUBE P=PE

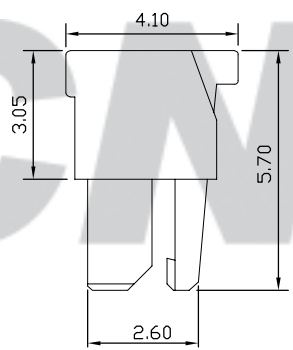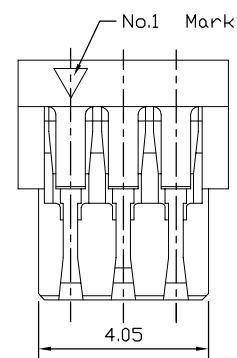

剖面 A-A

Circuits	Dimensions (mm)		
	A	B	C
12510(2P)	1.25	2.20	3.75
12510(3P)	2.50	3.20	5.00



2孔

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.25mm pitch Housing	Drawn: 张育斌 2016.05.24
	Model No: A12510Y-**-E1M-P	
UNIT: mm	SCALE: FULL REVISION: B/0	Checked: 林旭芝
	<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
		Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0345

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		①	Insulator	1	PBT (UL94V-0)	Beige