


RoHS Compliant

成品图

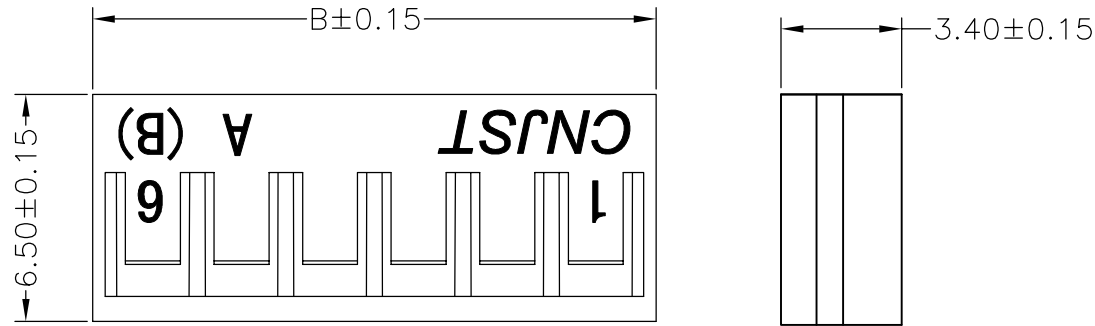


SPECIFICATION

- 1 Insulation resistance: $\geq 1000M\Omega$
- 2 Rated voltage: 250 V AC DC
- 3 Rated current: 3.0 A AC DC
- 4 Withstand Voltage: 800V AC/minute
- 5 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$



ORDER INFORMATION:

B2501Y--A6W-P**

PART No. _____ PACKAGING: P=PE
 No. OF CIRCUITS: _____ PLASTIC MATERIAL: A6W=PA66 (WHITE)

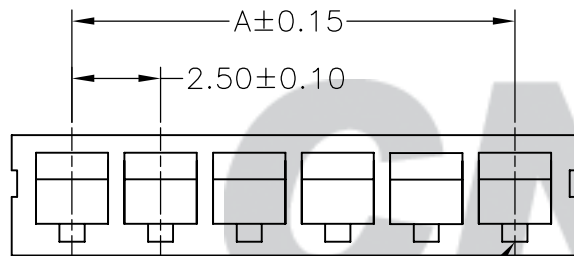

Circuit 1

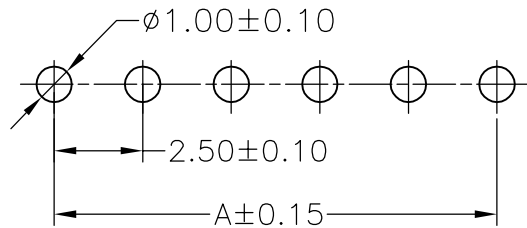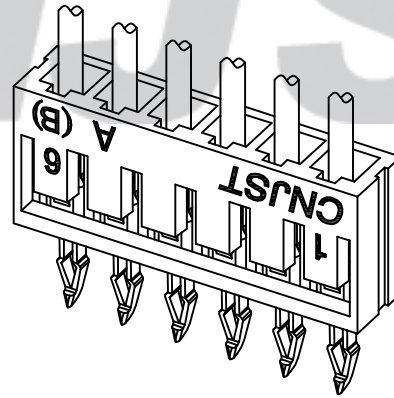

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

| Circuits | Dimensions (mm) | | Circuits | Dimensions (mm) | |
|----------|-----------------|-------|----------|-----------------|-------|
| | A | B | | A | B |
| 02 | 2.50 | 5.90 | 10 | 22.50 | 25.90 |
| 03 | 5.00 | 8.40 | 11 | 25.00 | 28.40 |
| 04 | 7.50 | 10.90 | 12 | 27.50 | 30.90 |
| 05 | 10.00 | 13.40 | 13 | 30.00 | 33.40 |
| 06 | 12.50 | 15.90 | 14 | 32.50 | 35.90 |
| 07 | 15.00 | 18.40 | 15 | 35.00 | 38.40 |
| 08 | 17.50 | 20.90 | 16 | 37.50 | 40.90 |
| 09 | 20.00 | 23.40 | | | |

| REV. | DATE | DESCRIPTION | APPD. | NO. | DESCRIPTION | QTY | MATERIAL | PLATING/COLOR |
|------|------------|-------------|-------|-----|-------------|-----|----------------|---------------|
| B/0 | 2016.05.12 | NEW RELEASE | | ① | Insulator | 1 | PA66 (UL94V-0) | White |

Tolerance
 X.X ± 0.30
 X.XX ± 0.20
 X.XXX ± 0.10
 Angle $\pm 3.0^{\circ}$

Model Name: 2.50mm PITCH 180° HOUSING
 Model No: B2501Y-**-A6W-P

SCALE: FULL REVISION: B/0

UNIT: mm

CNJST 浙江捷仕泰电子有限公司
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.12
 Checked: 林旭芝
 Approved: 刘祚杰
 DWG NO. CNJST/GCCP-0130