
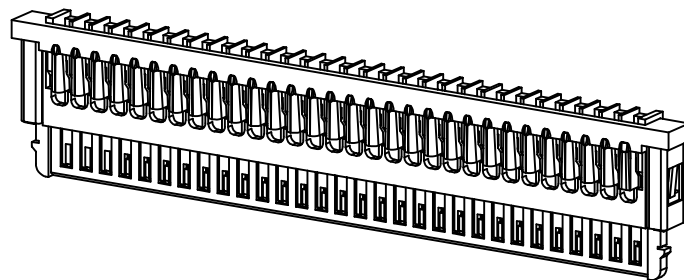
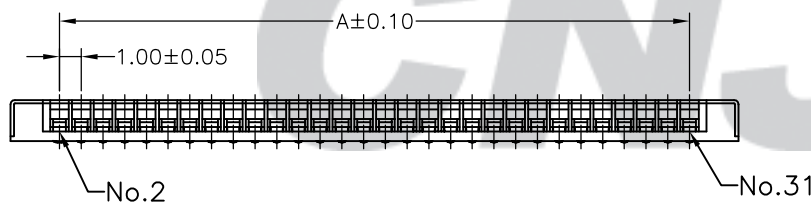



RoHS Compliant

REV.	ECN. NO.	DESCRIPTION	APPD.
	NEW RELEASE		

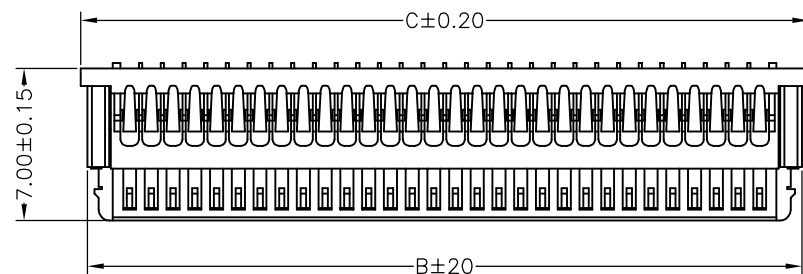

SPECIFICATION

- Contact resistance: $\leq 40m\Omega$
- Insulation resistance: $\geq 100M\Omega$
- Rated voltage: 200 V AC DC
- Rated current: 1.0 A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1006Y--B1MA-P**

PART No. _____
 No. OF CIRCUITS: _____
 14、20、30
 PLASTIC MATERIAL: _____
 BIM=PA46

PACKAGING:
 P=PE
 PLATING:
 A=Tin-plated

Circuits	Dimensions (mm)		
	A	B	C
14	13.00	15.88	17.50
20	19.00	21.88	23.50
30	29.00	31.88	33.50

②	Shell	2	Phosphor Bronze	Tin-plated
①	Insulator	1	PA46 (UL94V-0)	Nature
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm PITCH HOUSING		Drawn: 汪微微2013.01.01
	Model No: A1006Y-**-B1MA-P		
UNIT: mm		SCALE: FULL	REVISION: B/0
	CNJST 捷仕泰电子科技有限公司 JIESHITAI ELECTRONICS TECHNOLOGY CO., LTD.		Checked: 张 碧 Approved: 张 碧 DWG NO. CNJST/GCCP-0023