
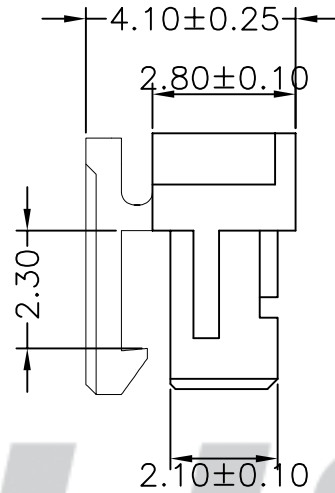


RoHS Compliant

成品图

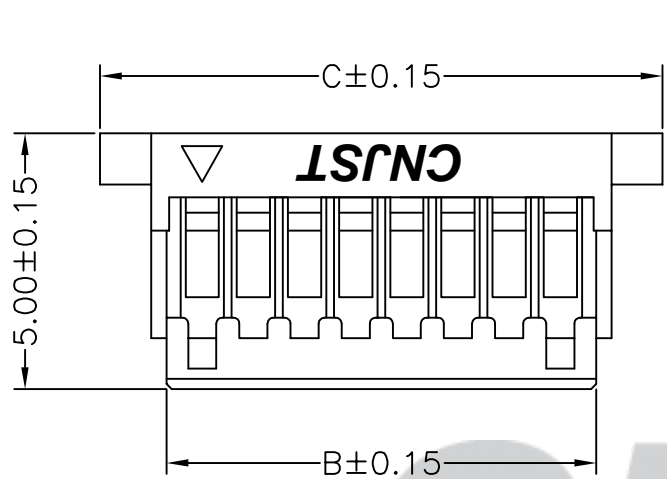



SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A1001YR-\*\*-A6W-P**

PART No. \_\_\_\_\_ PACKAGING: P=PE  
 No. OF CIRCUITS: \_\_\_\_\_ PLASTIC MATERIAL: A6W=PA66 (WHITE)  
 02~16

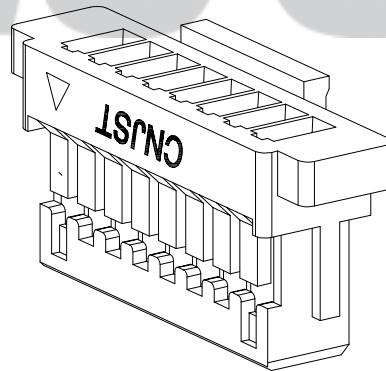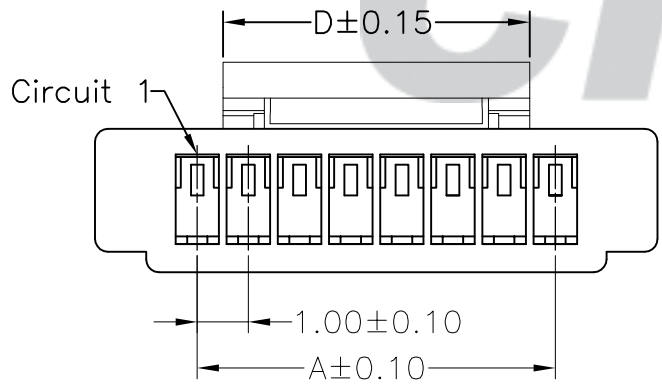

Circuits	Dimensions			
	A	B	C	D
02	1.00	2.40	5.00	3.00
03	2.00	3.40	6.00	4.00
04	3.00	4.40	7.00	5.00
05	4.00	5.40	8.00	6.00
06	5.00	6.40	9.00	
07	6.00	7.40	10.00	
08	7.00	8.40	11.00	
09	8.00	9.40	12.00	
10	9.00	10.40	13.00	
11	10.00	11.40	14.00	8.00
12	11.00	12.40	15.00	
13	12.00	13.40	16.00	
14	13.00	14.40	17.00	
15	14.00	15.40	18.00	
16	15.00	16.40	19.00	
17	16.00	17.40	20.00	
18	17.00	18.40	21.00	
19	18.00	19.40	22.00	
20	19.00	20.40	23.00	

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.18	NEW RELEASE		①	Insulator	1	PBT (UL94V-0)	White

Tolerance  
 X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 Angle ±3.0°

Model Name: 1.00mm PITCH HOUSING  
 Model No: A1001YR-\*\*-E1W-P

SCALE: FULL REVISION: B/0

**CNJST** 浙江捷仕泰电子有限公司  
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

UNIT: mm

Drawn: 蔡忠忠 2016.05.18  
 Checked: 林旭芝  
 Approved: 刘祚杰  
 DWG NO. CNJST/GCCP-0149