



RoHS Compliant

成品图

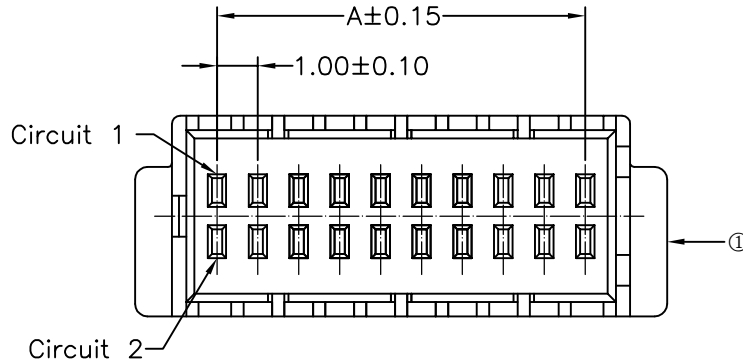

SPECIFICATION


- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

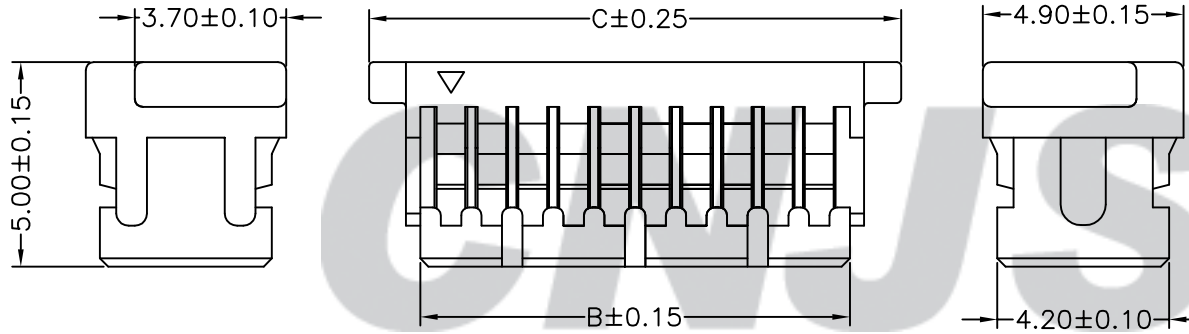

ORDER INFORMATION:

A1001Y-*-E1W-P**

PART No. _____ PACKAGING: P=PE
 No. OF CIRCUITS: _____ PLASTIC MATERIAL: E1W=PBT (WHITE)
 2X6~2X25

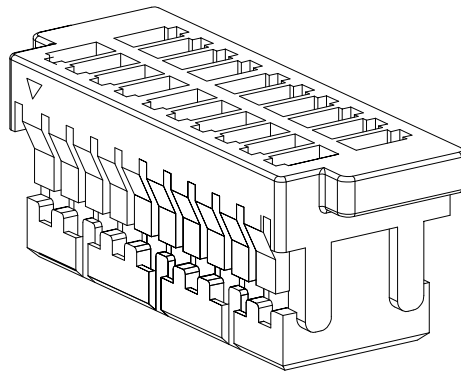

Circuits	Dimensions (mm)		
	A	B	C
2X6	5.00	6.40	9.00
2X8	7.00	8.40	11.00
2X10	9.00	10.40	13.00
2X15	14.00	15.40	18.00
2X20	19.00	20.40	23.00
2X25	24.00	25.40	28.00

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/O	2016.05.03	NEW RELEASE		①	Insulator	1	PBT (UL94V-0)	White

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm PITCH HOUSING	Drawn: 蔡忠忠 2016.05.03 Checked: 林旭芝 Approved: 刘祚杰 DWG NO. CNJST/GCCP-0017
	Model No: A1001Y-***-E1W-P	
	SCALE: FULL	REVISION: B/0
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	