



RoHS Compliant

成品图

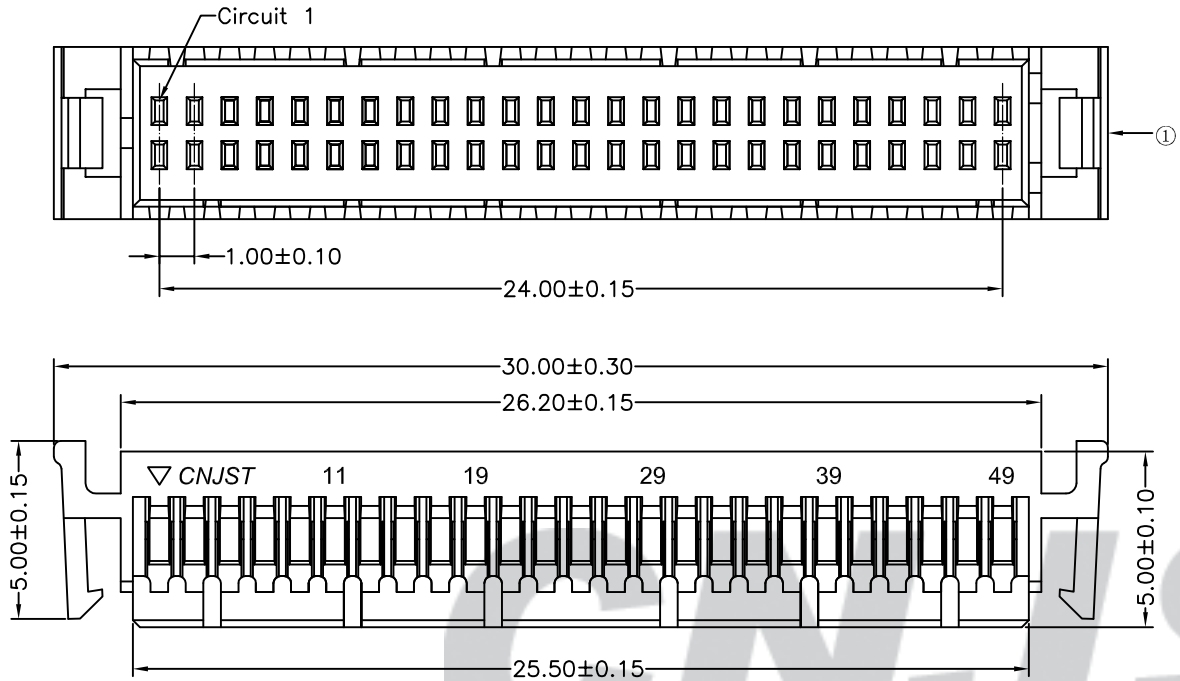

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$



ORDER INFORMATION:

A1001YR-225-E1W-P

PART No.	PACKAGING:
No. OF CIRCUITS:	P=PE
2X25	PLASTIC MATERIAL:
	E1W=PBT (WHITE)

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm pitch Housing	Drawn: 张育斌 2016.06.11
	Model No: A1001YR-225-E1W-P	
UNIT: mm	SCALE: FULL	REVISION: B/0
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
		Checked: 林旭芝
		Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0240

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		①	Insulator	1	PBT (UL94V-0)	White