


RoHS Compliant

成品图

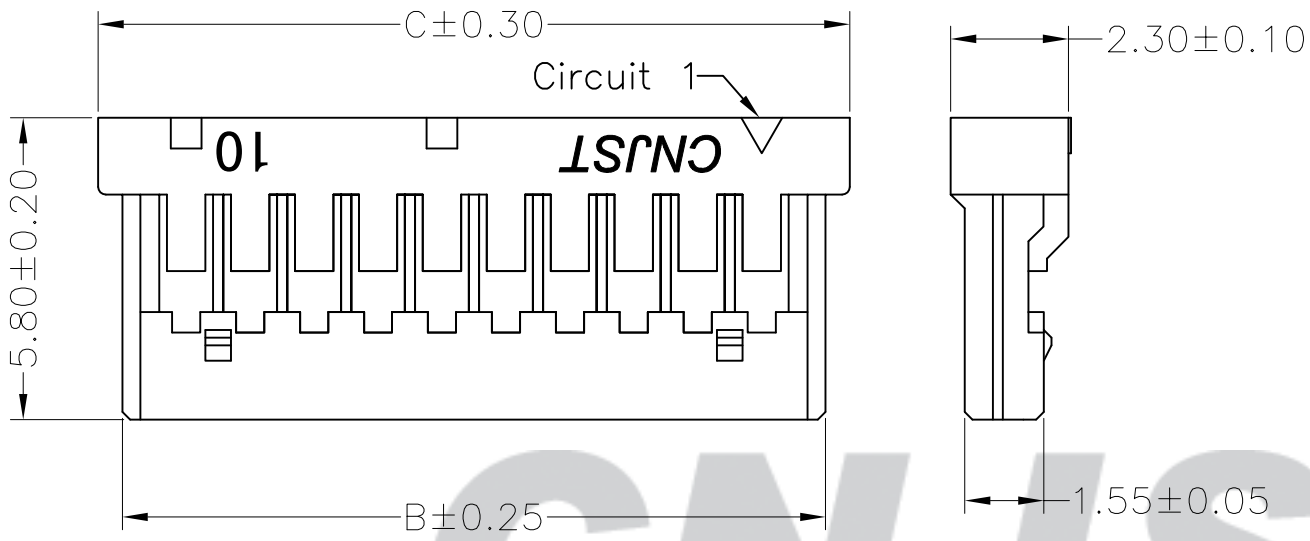



SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 150 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1252Y--A9M-P**

PART No.		PACKAGING: P=PE
No. OF CIRCUITS:		PLASTIC MATERIAL: A9M=PA66
02~30		

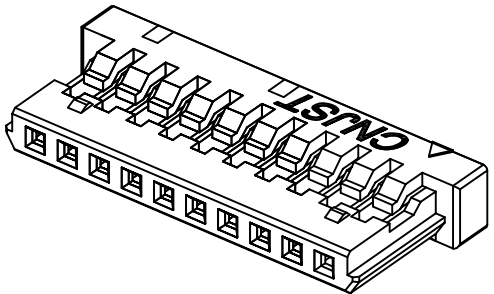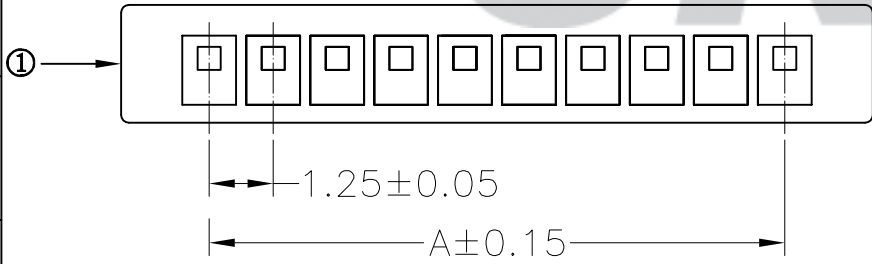

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
02	1.25	3.55	4.45	09	10.00	12.30	13.20
03	2.50	4.80	5.70	10	11.25	13.55	14.45
04	3.75	6.05	6.95	15	17.50	19.80	20.70
05	5.00	7.30	8.20	20	23.75	26.05	26.95
06	6.25	8.55	9.45	25	30.00	32.30	33.20
07	7.50	9.80	10.70	30	36.25	38.55	39.45
08	8.75	11.05	11.95				

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.04	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Nature

Tolerance	Model Name: 1.25mm PITCH HOUSING	Drawn: 蔡忠忠 2016.05.04
X.X ±0.30	Model No: A1252Y-**-A9M-P	Checked: 林旭芝
X.XX ±0.20	SCALE: FULL REVISION: B/0	
X.XXX ±0.10		
Angle ±3.0°		DWG NO. CNJST/GCCP-0031
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	