
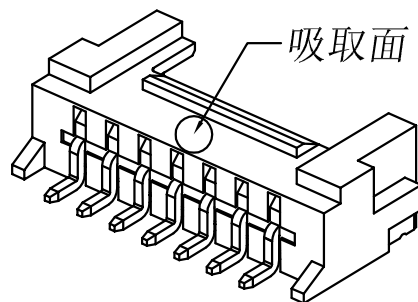
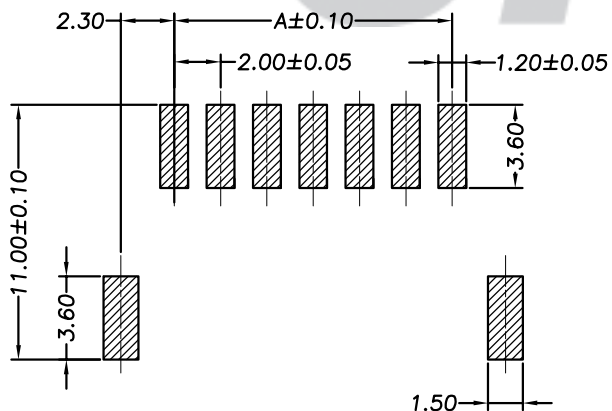


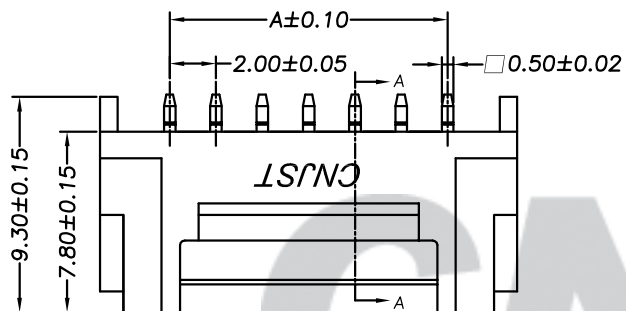



RoHS Compliant

成品图

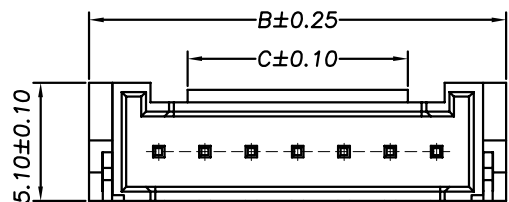

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2004AWR-**-F2MB-R

PART No: _____
 No. OF CIRCUITS: _____ PACKAGING: _____
 02~15 R=Reel
 PLASTIC MATERIAL: _____ PLATING: _____
 F2M=LCP (BEIGE) B=Matte Sn

Circuits	Dimensions (mm)		
	A	B	C
2	2.00	8.00	2.80
3	4.00	10.00	3.20
4	6.00	12.00	3.50
5	8.00	14.00	5.50
6	10.00	16.00	7.50
7	12.00	18.00	9.50
8	14.00	20.00	11.50
9	16.00	22.00	13.50
10	18.00	24.00	15.50
11	20.00	26.00	15.50
12	22.00	28.00	15.50
13	24.00	30.00	15.50
14	26.00	32.00	15.50
15	28.00	34.00	15.50

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

专利产品

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.00mm pitch 90° WAFER-SMT TYPE Model No: A2004AWR-**-F2MB-R	Drawn: 张育斌 2016.04.13
UNIT: mm	SCALE: FULL REVISION: B/0	Checked: 林旭芝
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0274

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
				③	Solder Tab	2	Brass	Tin-plated
				②	Contacts	2~15	Brass	Mattn Sn
				①	Insulator	1	LCP (UL94V-0)	BEIGE
B/0	2016.04.12	NEW RELEASE						