

RoHS Compliant

成品图




SPECIFICATION

- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A2008Y-\*\*\*-A8K-P**

PART No. [ ] PACKAGING: P=PE  
 No. OF CIRCUITS: [ ] PLASTIC MATERIAL: ASK=PA66 (BLACK)

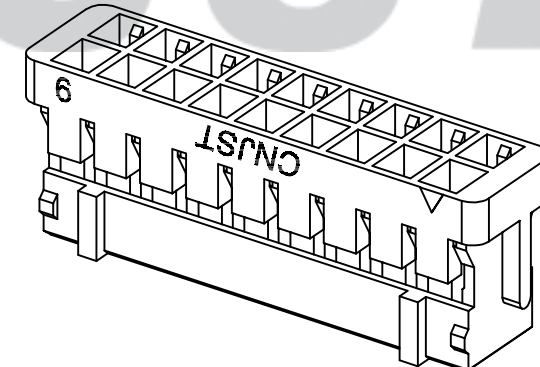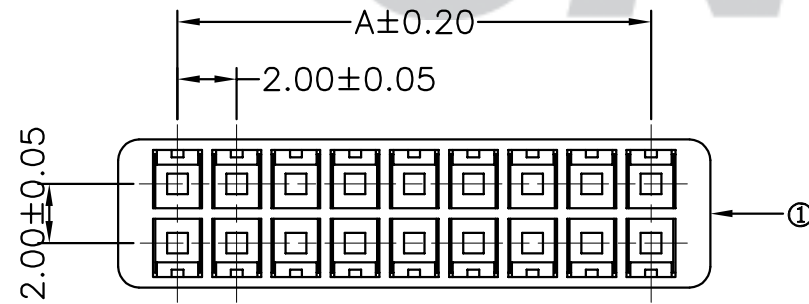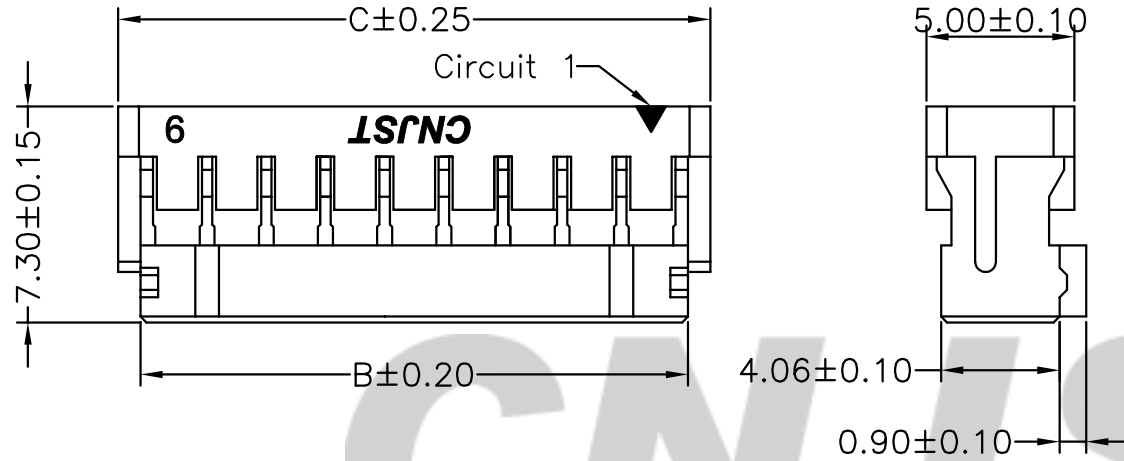

Circuits	Dimensions (mm)		
	A	B	C
202 (2X2)	2.00	4.50	6.00
203 (2X3)	4.00	6.50	8.00
204 (2X4)	6.00	8.50	10.00
205 (2X5)	8.00	10.50	12.00
206 (2X6)	10.00	12.50	14.00
207 (2X7)	12.00	14.50	16.00
208 (2X8)	14.00	16.50	18.00
209 (2X9)	16.00	18.50	20.00
210 (2X10)	18.00	20.50	22.00
211 (2X11)	20.00	22.50	24.00
212 (2X12)	22.00	24.50	26.00
213 (2X13)	24.00	26.50	28.00
214 (2X14)	26.00	28.50	30.00
215 (2X15)	28.00	30.50	32.00

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.09	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance  
 X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 Angle ±3.0°

Model Name: 2.00mm PITCH HOUSING  
 Model No: A2008Y-\*\*\*-A8K-P

SCALE: FULL REVISION: B/0

UNIT: mm

**CNJST** 浙江捷仕泰电子有限公司  
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.09  
 Checked: 林旭芝  
 Approved: 刘祚杰  
 DWG NO. CNJST/GCCP-0069