


RoHS Compliant

成品图

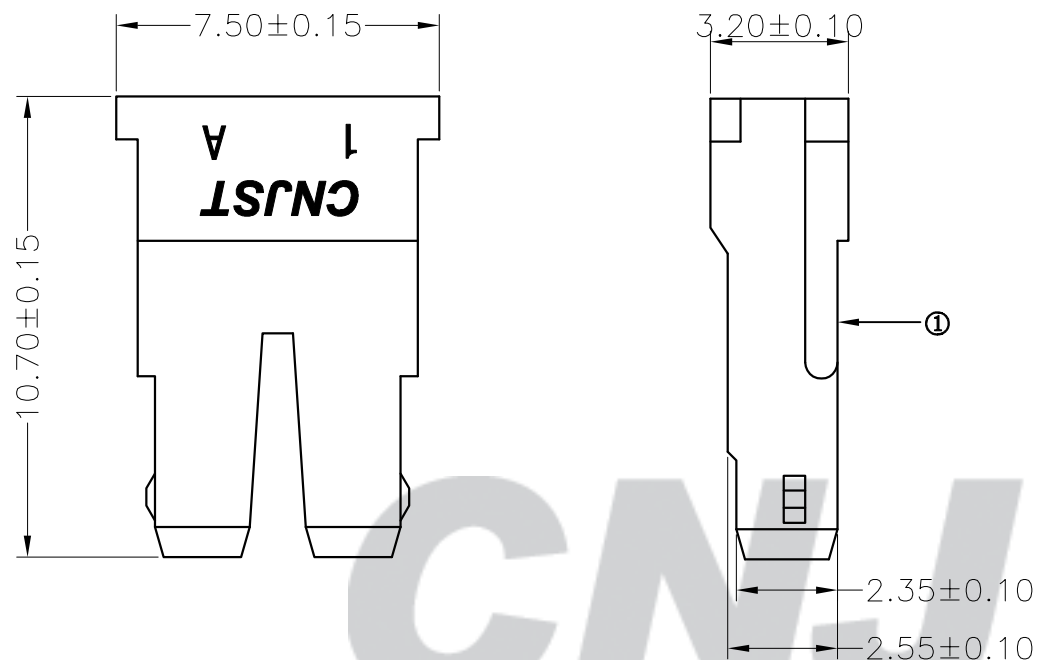

SPECIFICATION



- 1 Contact resistance: $\leq 10m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 1400 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 3800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A3501Y-02-A6W-P

PART No. _____
 No. OF CIRCUITS: _____
 02

PACKAGING: P=PE
 PLASTIC MATERIAL: A6W=PA66 (WHITE)

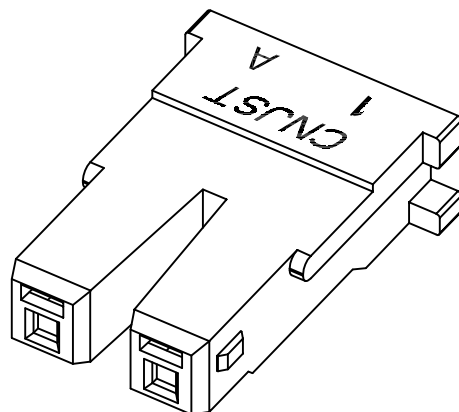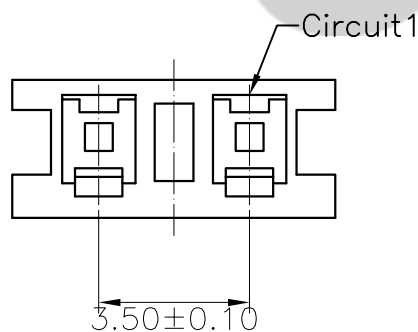

Tolerance X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10 Angle $\pm 3.0^{\circ}$	Model Name: 3.50mm PITCH HOUSING	Drawn: 蔡忠忠 2016.05.10
	Model No: A3501Y-02-A6W-P	
	SCALE: FULL	REVISION: B/0
UNIT: mm	Approved: 刘祚杰	
	DWG NO. CNJST/GCCP-0103	

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.10	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White