


RoHS Compliant

成品图


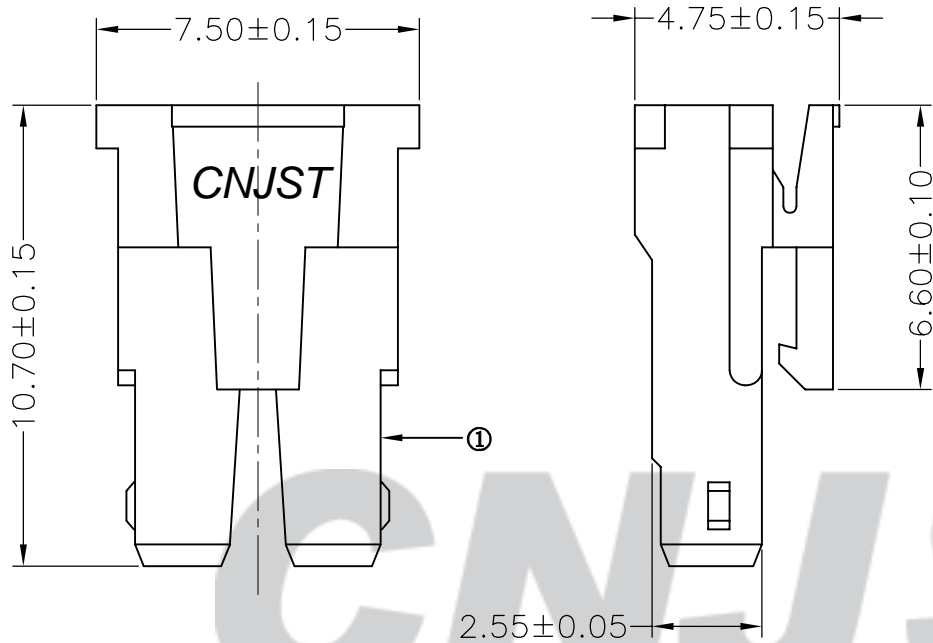


SPECIFICATION

- 1 Contact resistance: $\leq 10m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 1400 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 3800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A3503Y-02-A**-P	
PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 02	PLASTIC MATERIAL: A6W=PA66 (WHITE) A6G=PA66 (GREY)

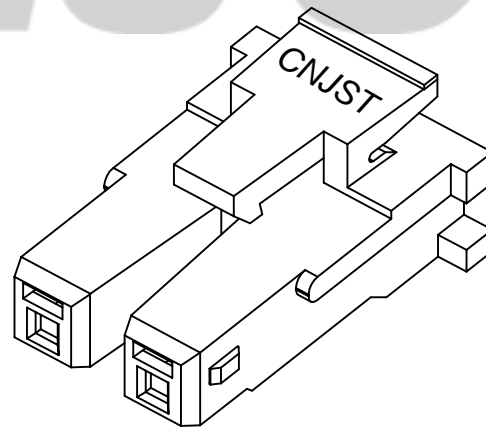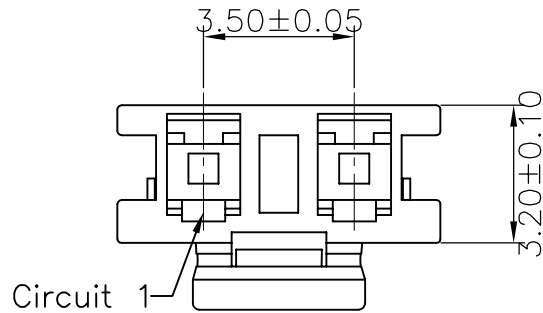

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 3.50mm PITCH HOUSING	SCALE: FULL REVISION: B/0	Drawn: 蔡忠忠 2016.06.11
	Model No: A3503Y-02-A**-P		
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD		Approved: 刘祚杰
			DWG NO. CNJST/GCCP-0200

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.06.11	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	