


RoHS Compliant

成品图

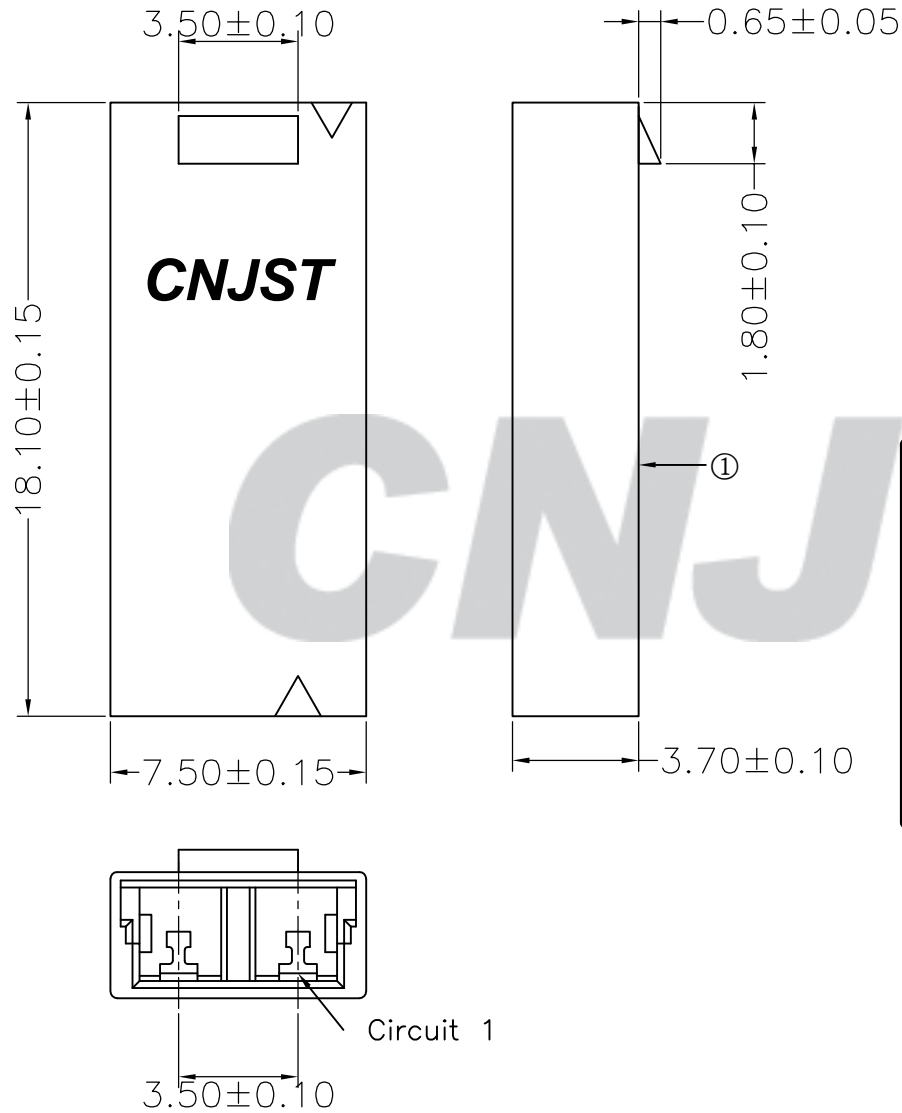

SPECIFICATION


- Contact resistance: $\leq 10\text{m}\Omega$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Rated voltage: 1400 V AC DC
- Rated current: 1.0 A AC DC
- Withstand Voltage: 3800V AC/minute
- Temperature Range: $-25^\circ\text{C} \sim +85^\circ\text{C}$

ORDER INFORMATION:

C3502P-02-A6W-P

PART No. **C3502P-02** No. OF CIRCUITS: **02**

PACKAGING: **P=PE**
 PLASTIC MATERIAL: **A6W=PA66 (WHITE)**

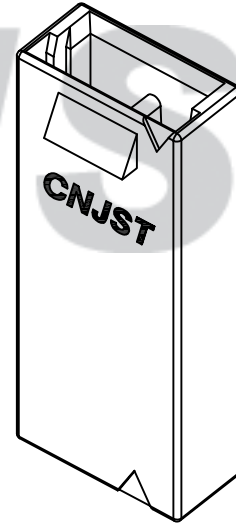

Tolerance	Model Name: 3.50mm PITCH HOUSING
X.X ±0.30	Model No: C3502P-02-A6W-P
X.XX ±0.20	SCALE: FULL REVISION: B/0
X.XXX ±0.10	UNIT: mm
Angle ±3.0°	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.20
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0177

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.20	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White