RoHS Compliant

成品图

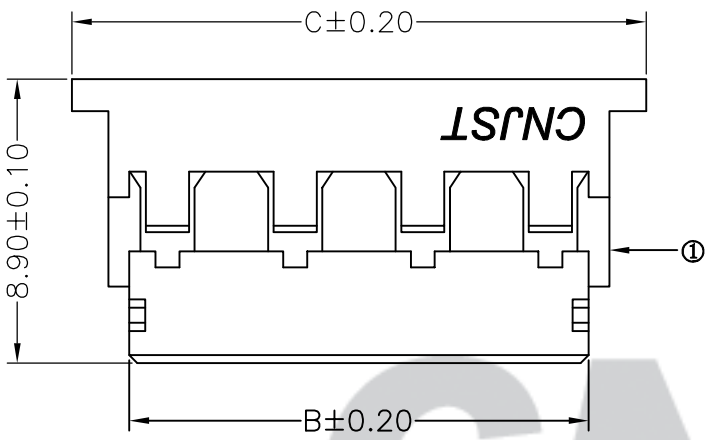

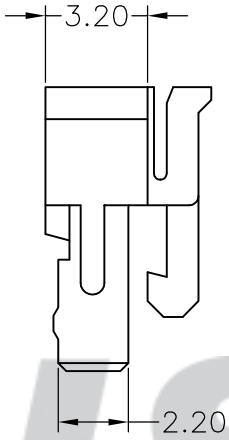

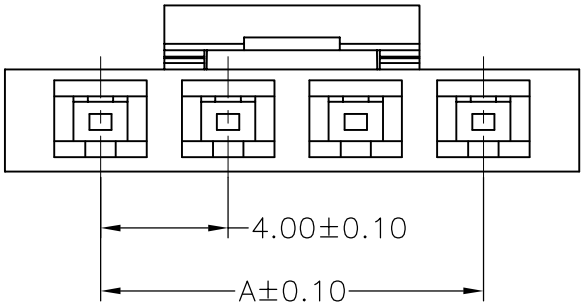

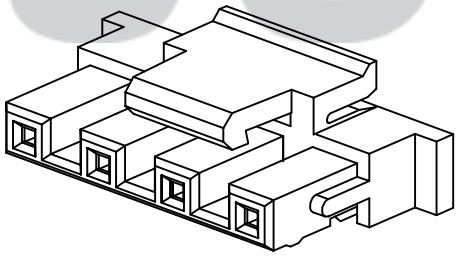

SPECIFICATION

1 Contact resistance: ≤10mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 600 V AC DC
4 Rated current: 1.0 A AC DC
5 Withstand Voltage: 1800V AC/minute
6 Temperature Range:-25℃～ +85℃

ORDER INFORMATION:

A4003Y-**-A6W-P

- PART No.
- No. OF CIRCUITS: 02～05
- PLASTIC MATERIAL: A6W=PA66(WHITE)
- PACKAGING: P=PE

Circuits	Dimensions(mm)		
	A	B	C
02	4.00	6.40	10.00
03	8.00	10.40	14.00
04	12.00	14.40	18.00
05	16.00	18.40	22.00

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.05.21	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
①	Insulator	1	PA66(UL94V-0)	White

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

Model Name:4.00mmPITCH HOUSING
Model No: A4003Y-**-A6W-P

SCALE:FULL | REVISION:B/0

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn:蔡忠忠2016.05.21
Checked: 林旭芝
Approved: 刘祚杰
DWG NO.CNJST/GCCP-0180

CNJST